


Rear Quarter Panel Moulding


Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the retainers and the push pins.
Torque: 71 lb.in (8 Nm)

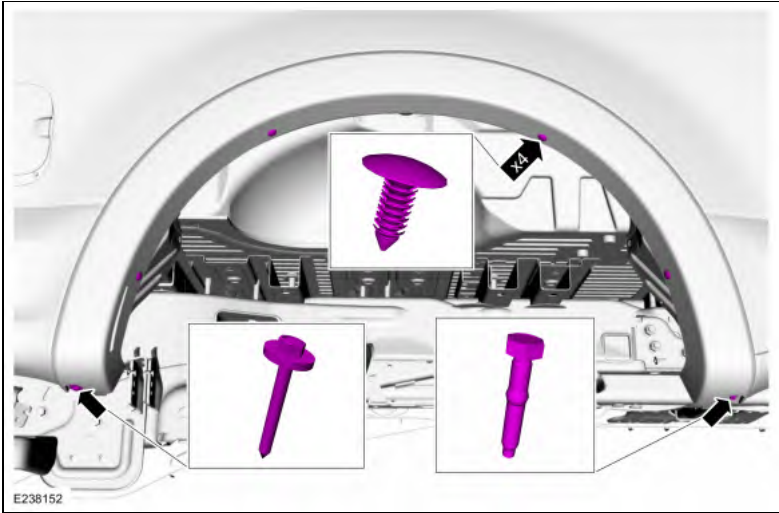

2. **NOTE:** Use moderate force to avoid breaking retainer clips.
- Using a non-marring trim tool, detach the retainers and remove the rear quarter panel moulding.

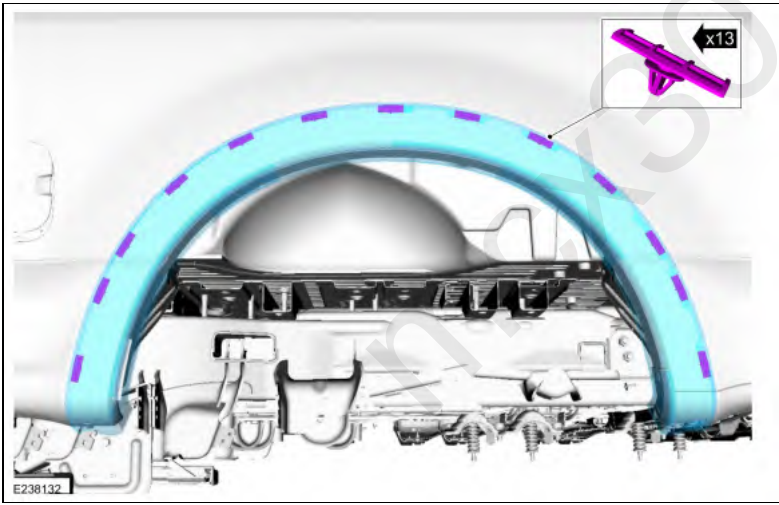

Installation

1. To install, reverse the removal procedure.

