

Roof Moulding

Removal


NOTE: Removal steps in this procedure may contain installation details.

NOTE: Regular cab shown, super and crew cabs similar.

- 1. Remove the back glass.
Refer to: Fixed Glass (501-11 Glass, Frames and Mechanisms, General Procedures).
- 2. Drill out the rivet on the rear corner of the roof molding.



- 3. **NOTE:** Use care while removing the moulding to avoid breaking tabs along the edge of the moulding.
Detach the roof moulding from the retainer clips and remove the roof moulding.

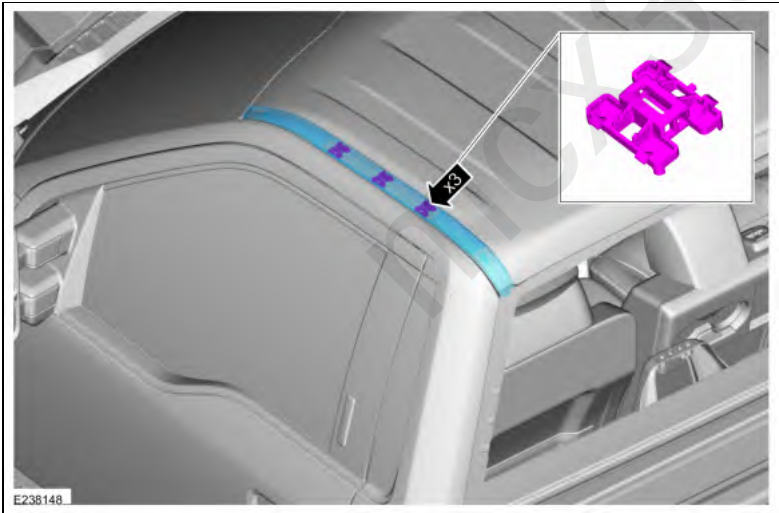

Installation

- 1. To install, reverse the removal procedure.

