


Front Seat Control Switch


Removal

NOTE: Driver seat shown, passenger seat similar.

1. If equipped.
Remove the clip and the front seat recline handle.

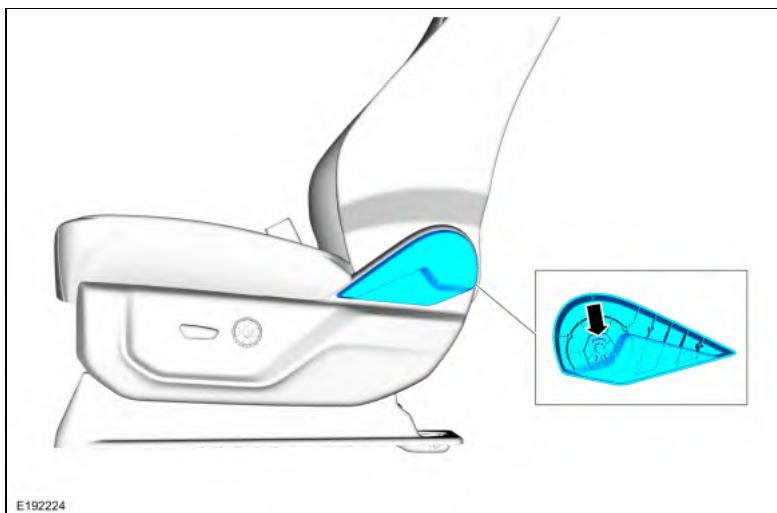


2. Remove the front seat side shield screws.

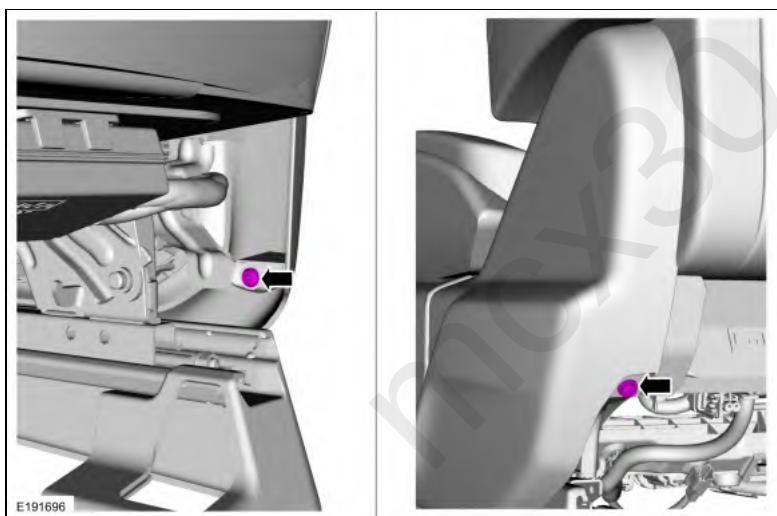


3. **NOTE:** Front seat side shield with power recline seat shown, all others similar.

Remove the front seat side shield.


1. Lift up on the rear of the front seat side shield and pull outward.
2. Push the front seat side shield forward.
3. Disconnect the electrical connector.

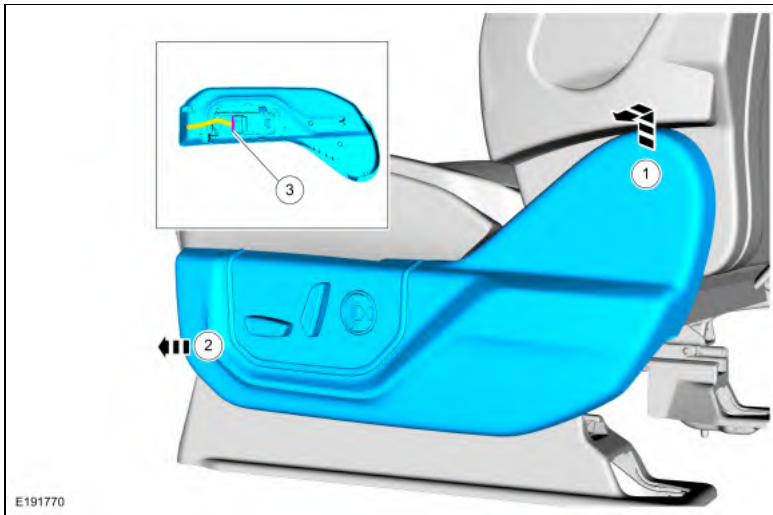

4. Remove the front seat control switch knob(s).

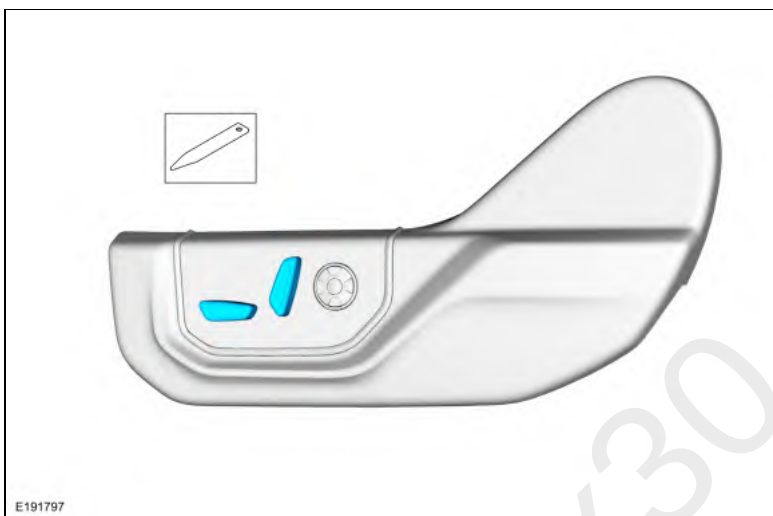

5. Remove the screws and the front seat control switch.

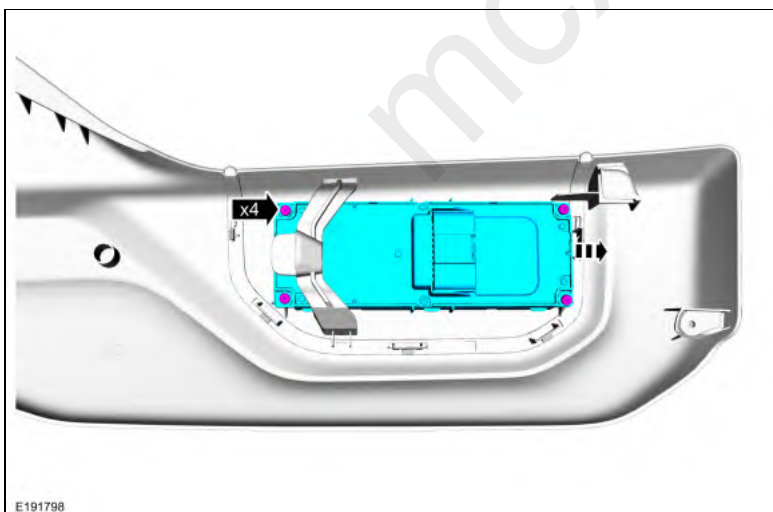

Installation

1. To install, reverse the removal procedure.

