

Rear Door Glass Run and Bracket - Super Cab, Vehicles With: Front Power Windows

Removal

NOTE: LH side shown, RH side similar.


NOTE: Removal steps in this procedure may contain installation details.

1. Remove the rear door trim panel.
Refer to: Rear Door Trim Panel - Super Cab (501-05 Interior Trim and Ornamentation, Removal and Installation).
2. Remove the watershield.




Aft rear door glass run and bracket

3. Remove the bolts and the aft rear door glass run and bracket.
Torque: 93 lb.in (10.5 Nm)

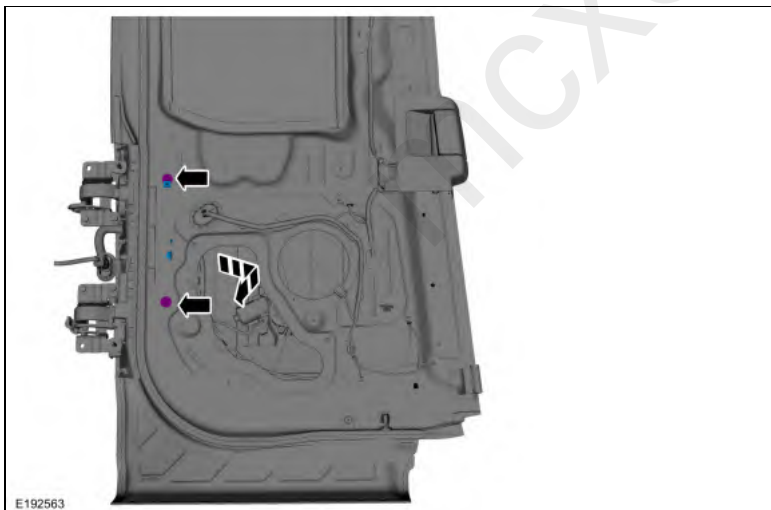


Fore rear door glass run and bracket

4. Remove the rear door speaker.
Torque: 22 lb.in (2.5 Nm)

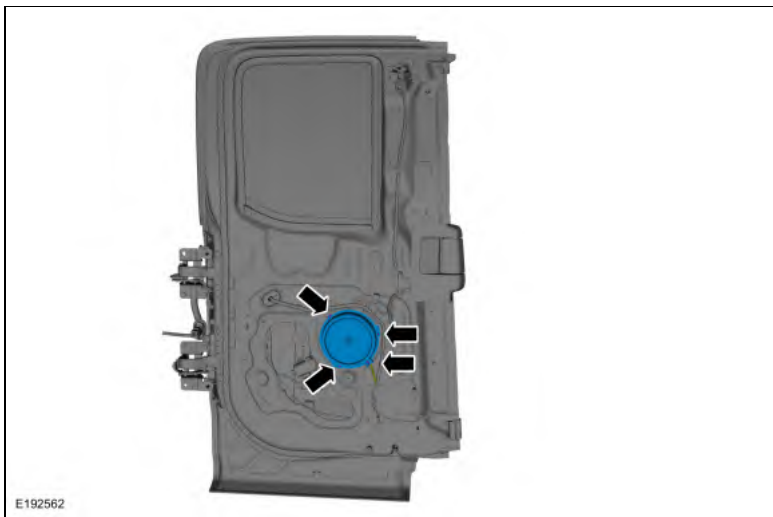

5. Remove the fore rear door glass run and bracket.
 1. Remove the fore rear door glass run and bracket bolts.
Torque: 93 lb.in (10.5 Nm)
 2. Remove the fore rear door glass run and bracket.

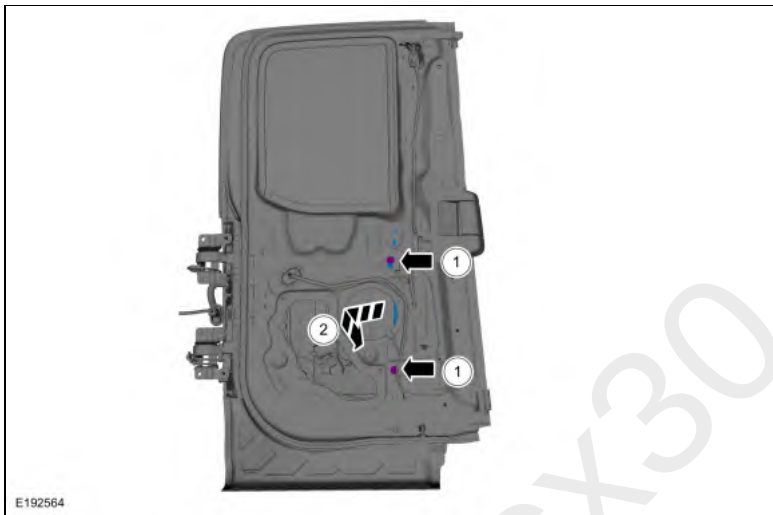

Installation

1. To install, reverse the removal procedure.