

Rear Door Window Glass - Crew Cab

Removal

All vehicles

NOTE: LH side shown, RH side similar.

1. Remove the rear door upper moulding.
Refer to: Rear Door Upper Moulding (501-08 Exterior Trim and Ornamentation, Removal and Installation).
2. Remove the rear door trim panel.
Refer to: Rear Door Trim Panel - Crew Cab (501-05 Interior Trim and Ornamentation, Removal and Installation).
3. Remove the watershield.




Vehicles with manual windows

4. Lower the rear door window glass.
 1. Partially install the window regulator handle.
 2. Lower the rear door window glass.



Vehicles with power windows

5. Remove the rear door window control switch

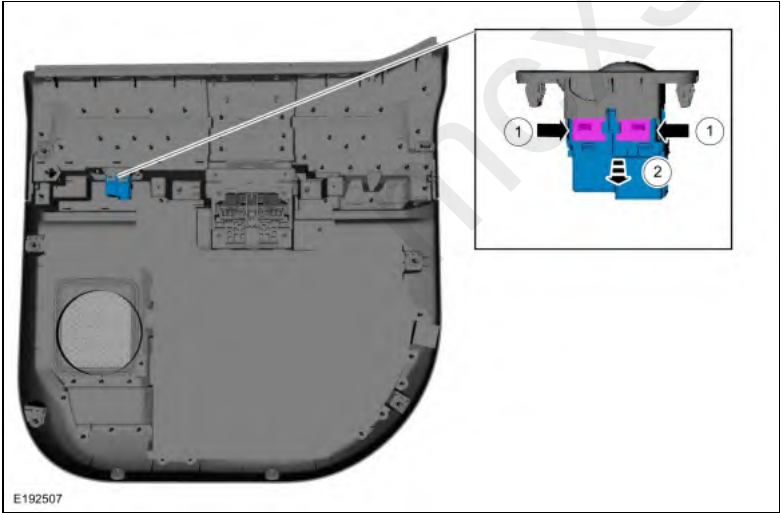


6. Lower the rear door window glass.
1. Install the rear door window control switch.
 2. Lower the rear door window glass.




All vehicles

7. Remove the inner belt moulding.

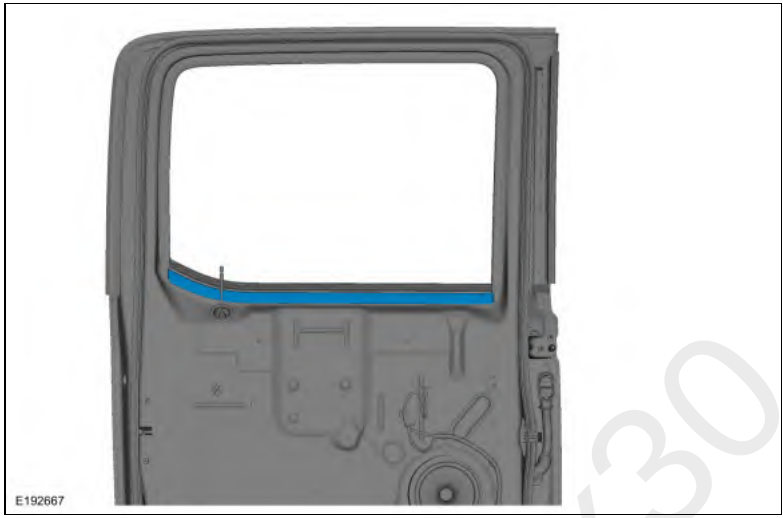


8. Remove the rear door glass top run.

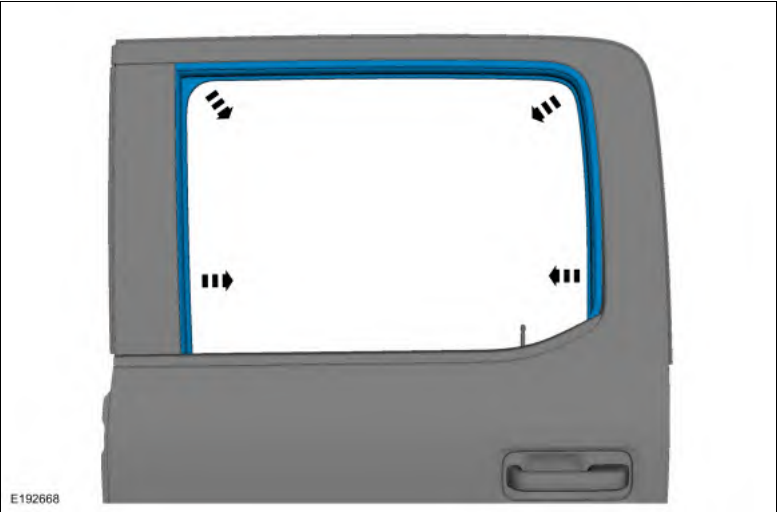


Vehicles with manual windows

9. Release the clips from rear door window glass.

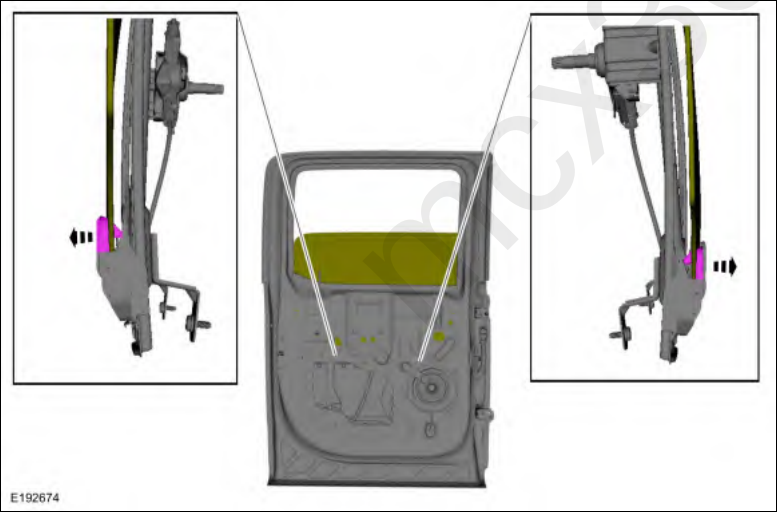

Vehicles with power windows

10. Release the clips from rear door window glass.

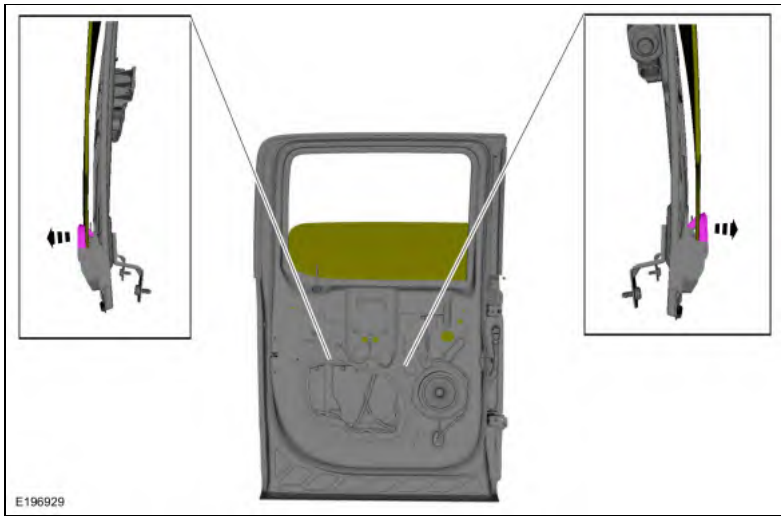

All vehicles

- 11. Remove the rear door glass.



Installation

- 1. To install, reverse the removal procedure.