

Rear Door Window Regulator - Crew Cab, Vehicles With: Rear Manual Windows

Removal

NOTE: LH side shown, RH side similar.

NOTE: Removal steps in this procedure may contain installation details.


1. Remove the rear door trim panel.
Refer to: Rear Door Trim Panel - Crew Cab (501-05 Interior Trim and Ornamentation, Removal and Installation).
2. Remove the watershield.




3. Lower the rear door window glass.
 1. Partially install the window regulator handle.
 2. Lower the rear door window glass.



4. Release the clips from rear door window glass.

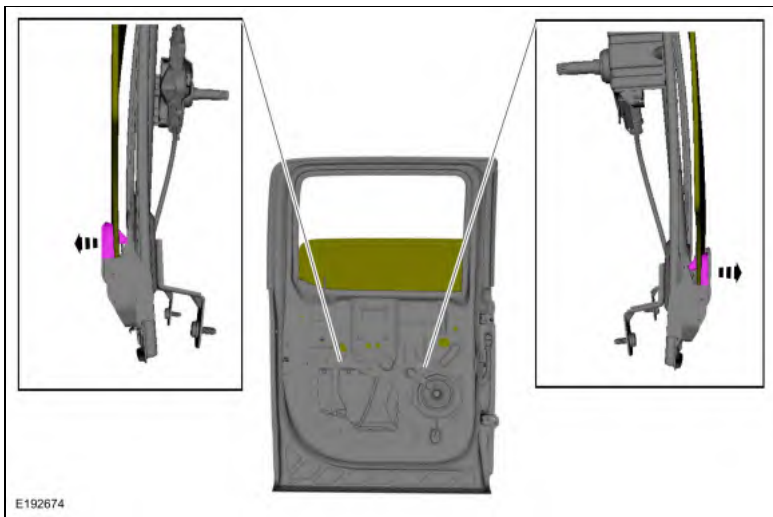

5. Raise the rear door window glass and tape in place.
1. Raise the rear door window glass.
 2. Tape the rear door window glass in place.

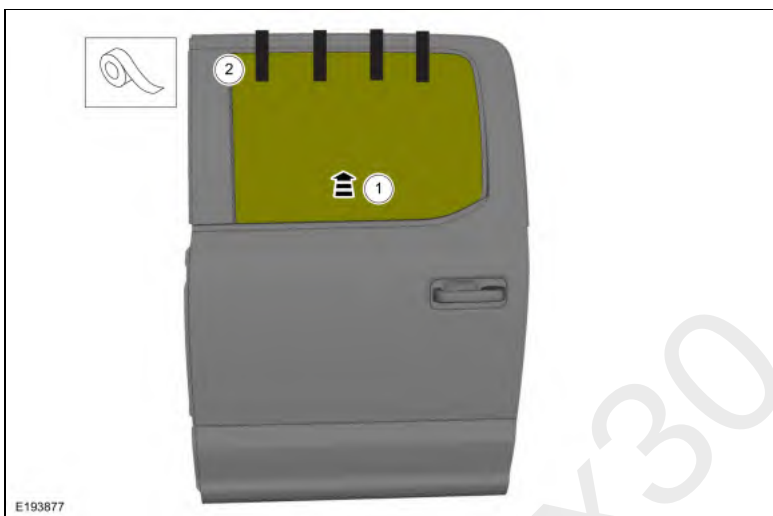

6. Remove the rear door window glass regulator handle.



7. Remove the rear door window regulator bolts and nuts.
Torque: 93 lb.in (10.5 Nm)



8. Remove the rear door window regulator.



Installation

- 1. To install, reverse the removal procedure.

mcx30.com