


Keyless Entry Rear Antenna

Removal

1. Remove the tailgate release handle.
Refer to: Tailgate Release Handle (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).
2. Remove the keyless entry rear antenna.
 1. Disconnect the electrical connector from the keyless entry rear antenna.
 2. Remove the screws and the keyless entry rear antenna.

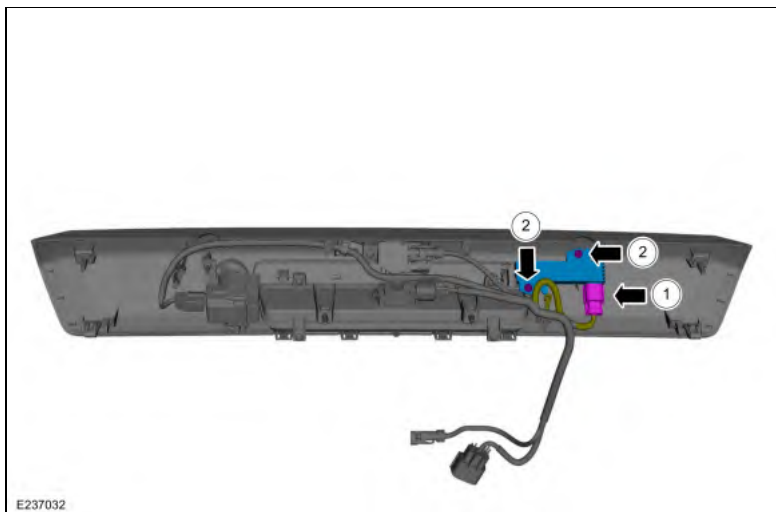

Installation

1. To install, reverse the removal procedure.
2. If equipped with 360 degree view camera, align the rear camera.
Refer to: 360 Degree View Camera Alignment (413-13B Parking Aid - Vehicles With: Parking Aid Camera, General Procedures).