


Rear Door Cable - Super Cab

Removal

NOTE: LH side shown, RH side similar.

Upper door latch cable

1. Remove the interior rear door handle.
Refer to: Interior Rear Door Handle - Super Cab (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).
2. Remove the rear door upper latch.
Refer to: Rear Door Upper Latch - Super Cab (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).
3. Remove the rear door upper latch cable.

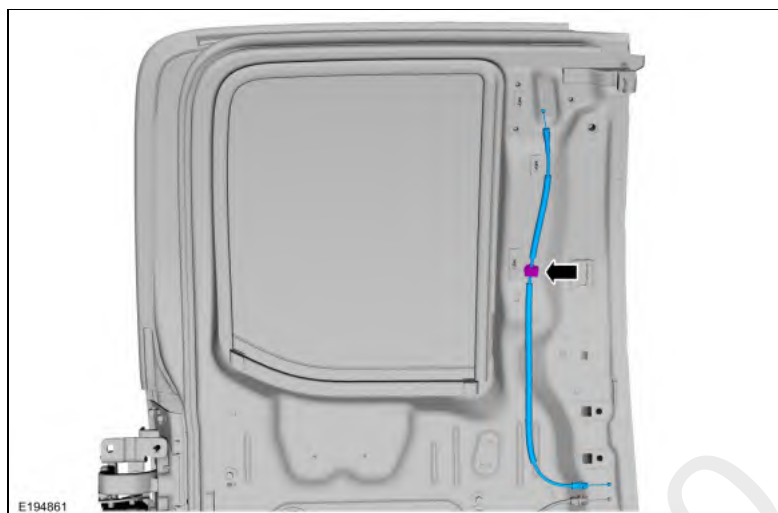

Lower door latch cable

4. **NOTE:** The lower door latch cable is serviced with the rear door lower latch as an assembly.

Remove the rear door lower latch.

Refer to: Rear Door Lower Latch - Super Cab (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).

Installation

1. To install, reverse the removal procedure.