


Air Deflector


Removal

NOTE: Removal steps in this procedure may contain installation details.


1. Fully open the roof opening panel glass.

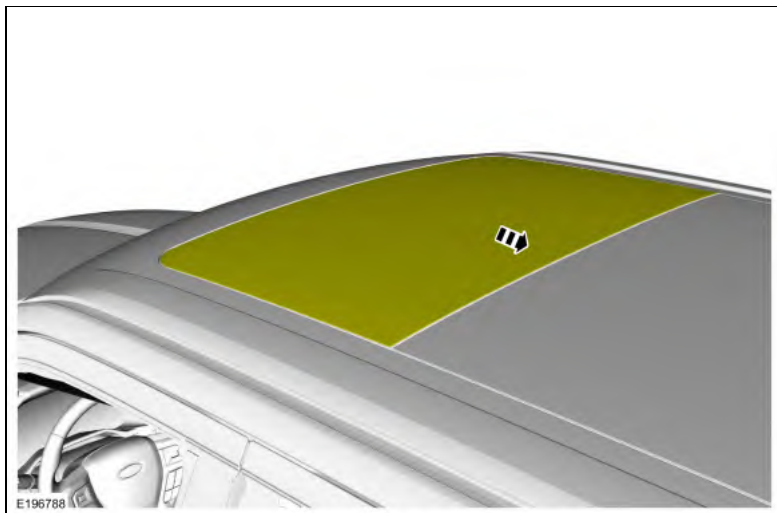


2. On both sides.
Push the air deflector arm downward and slide it through the track channel to remove.

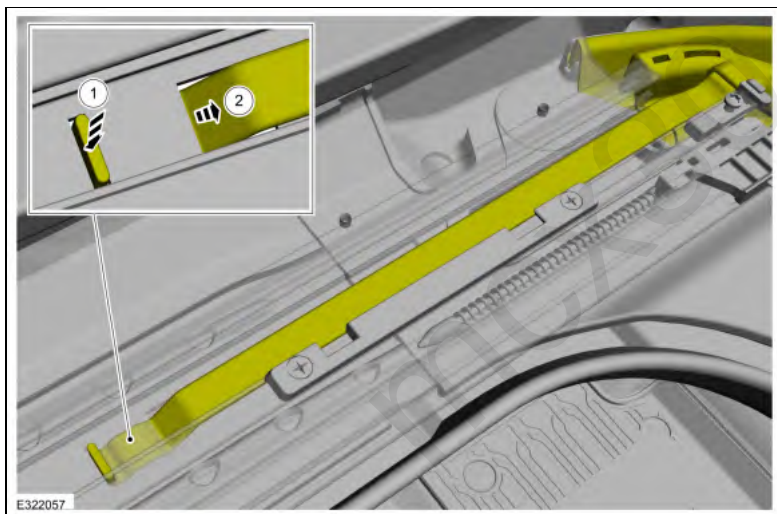

3. Push downward on the air deflector material and detach the plastic edge of the fabric material from the frame tabs.

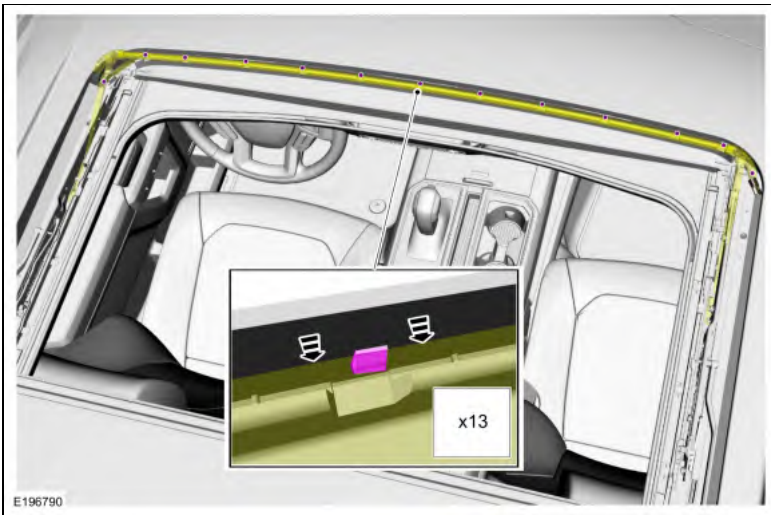


4. Slide the air deflector arms rearward in the frame rails, roll the arms out of the rails and remove the air deflector.


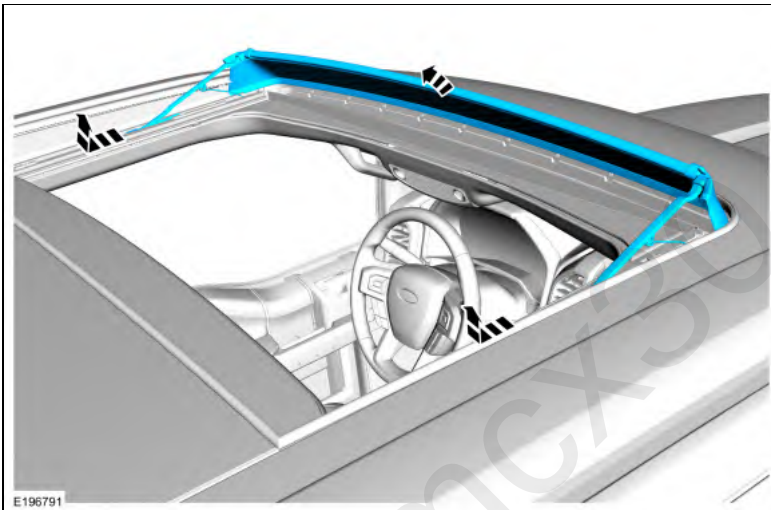


Installation

- On both sides.
Slide the air deflector arm through the track channel and make sure the arm end gets locked into the track channel.

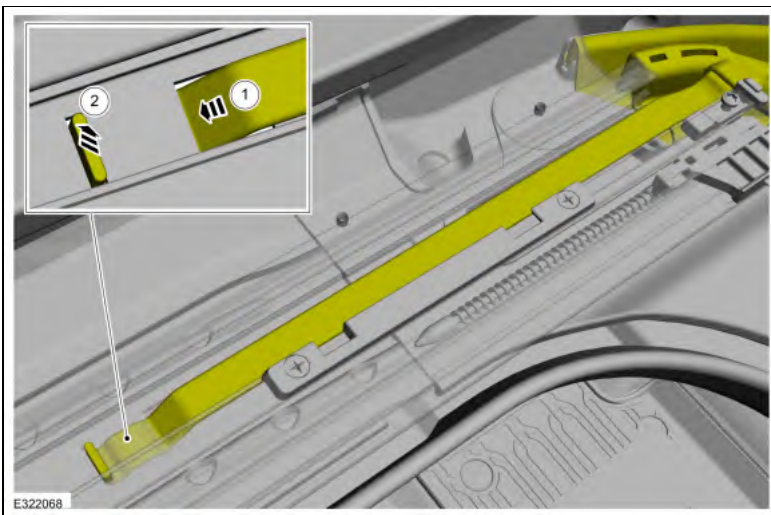


2. Attach the plastic edge of air deflector fabric material to the frame tabs.

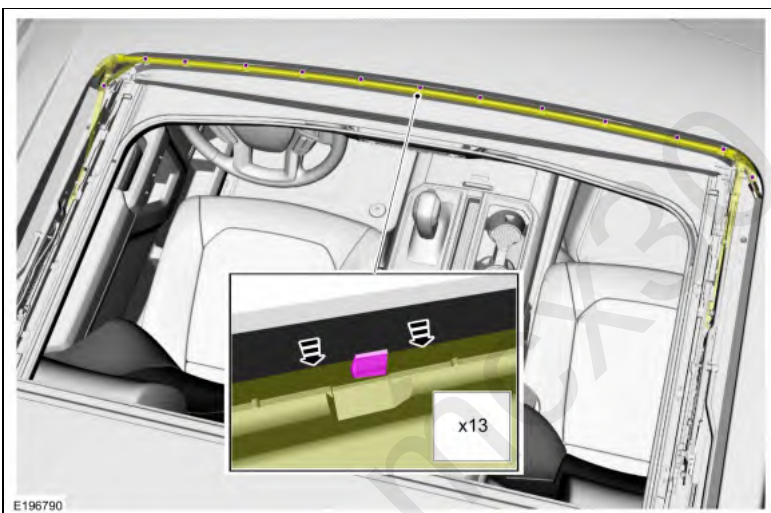

3. **NOTICE:** If the deflector fabric material is not centered, the deflector arms may make contact with the sides of the frame causing a bind and a possible bounce-back condition when closing the glass.

Make sure the alignment mark on the deflector fabric material is aligned with the center frame tab opening. Move the deflector fabric material from side-to-side as necessary.

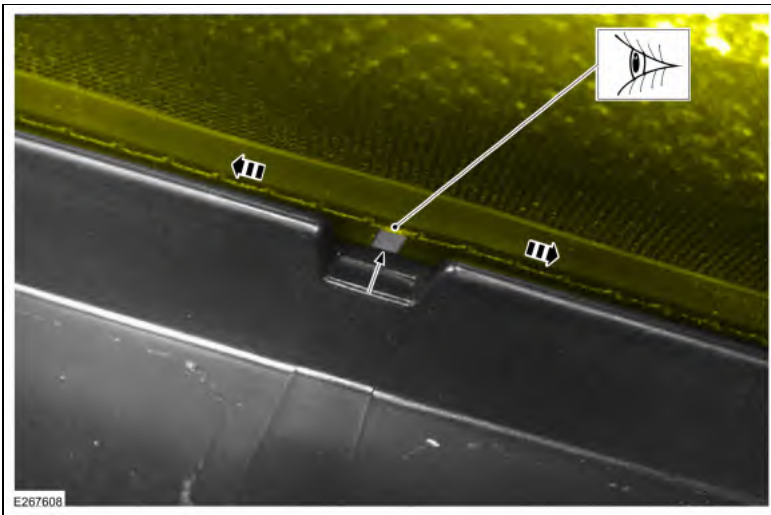

4. Carry out the roof opening panel initialization.
Refer to: Power Roof Opening Panel Initialization (501-17 Roof Opening Panel - Vehicles With: Vista Roof Opening Panel, General Procedures).

mcx30.com