


## Trailer Hitch


### Removal

**NOTE:** Removal steps in this procedure may contain installation details.


1. Remove the rear bumper.  
Refer to: Rear Bumper (501-19 Bumpers, Removal and Installation).
2. Disconnect the electrical connector LH side and position aside the wiring harness.

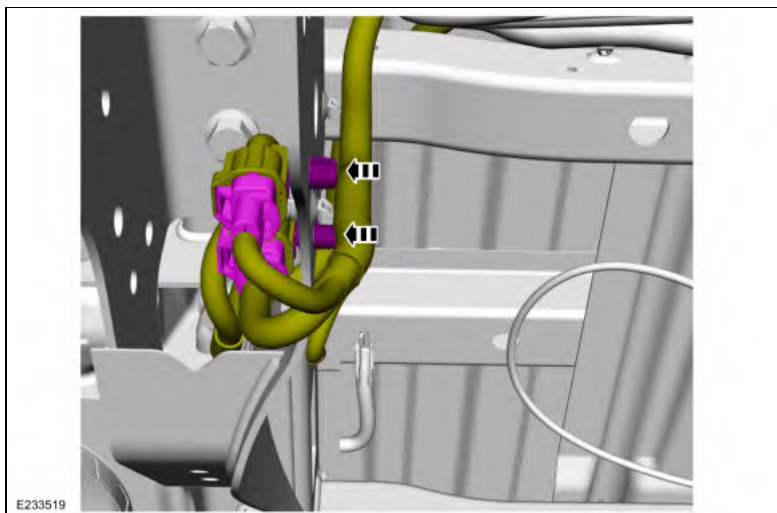

3. Position aside the wiring harness on the RH side.

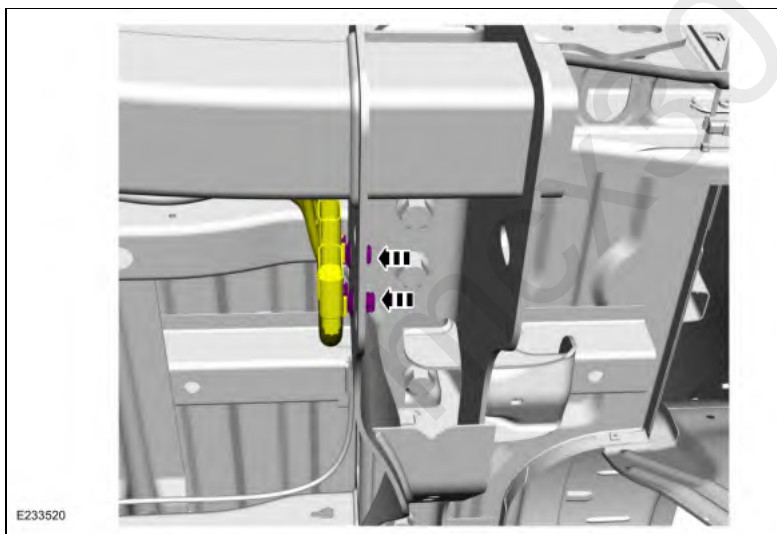


4. Remove the bumper bracket-to-trailer hitch bolts on both sides.

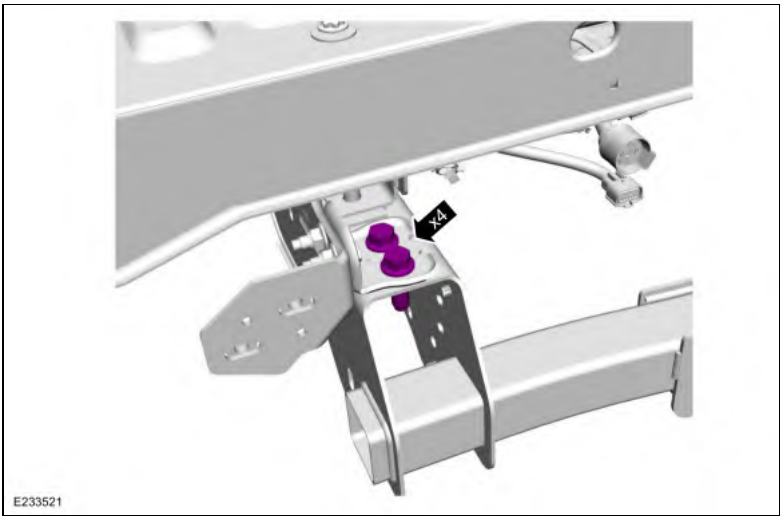

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |

5. With help of an assistant, remove the trailer hitch-to-frame bolts on both sides and remove the trailer hitch assembly.  
*Torque: 203 lb.ft (275 Nm)*

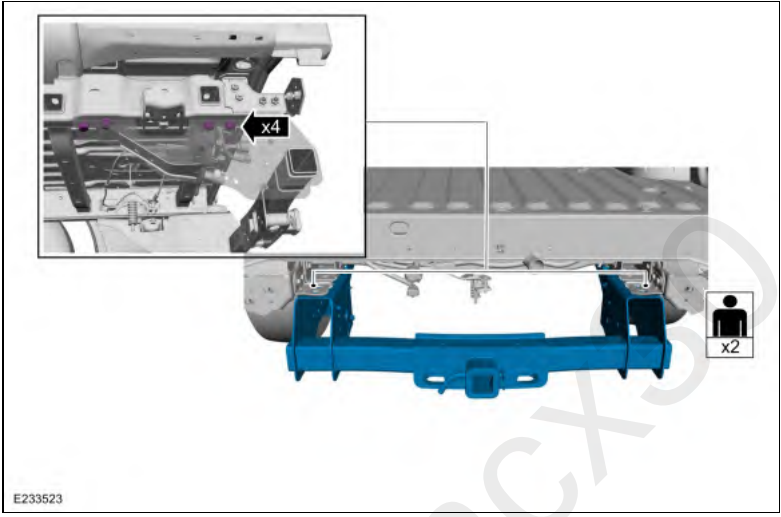

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |
|  |

**Installation**

1. To install, reverse the removal procedure.