


Differential Fluid Level Check

Materials


Name	Specification
Motorcraft® SAE 75W-85 Premium Synthetic Hypoid Gear Lubricant XY-75W85-QL	WSS-M2C942-A

Check


- With the vehicle in NEUTRAL, position it on a hoist.
Refer to: Jacking and Lifting - Overview (100-02 Jacking and Lifting, Description and Operation).
- Remove the differential fluid fill plug.

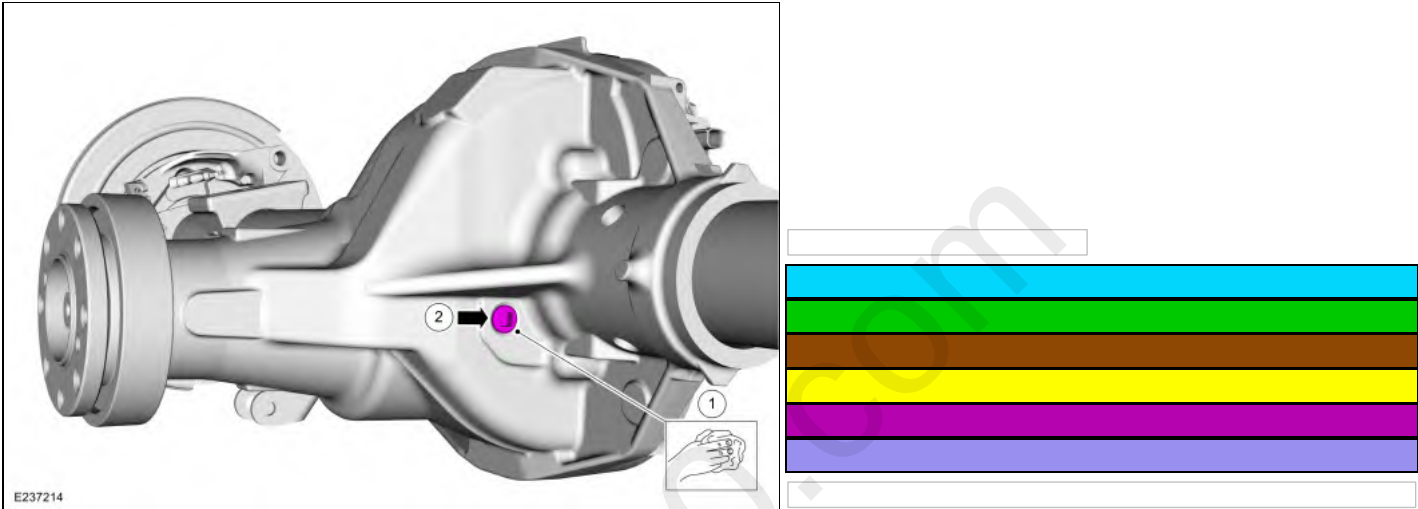

- Check and top off the differential with clean differential gear lubricant. The differential gear lubricant level should be within 6mm (1/4 in.) from the fluid level fill plug opening.
Refer to: Specifications (205-02D Rear Drive Axle/Differential - Vehicles With: Ford 10.5 Inch Ring Gear, Specifications).
Material: Motorcraft® SAE 75W-85 Premium Synthetic Hypoid Gear Lubricant / XY-75W85-QL (WSS-M2C942-A)

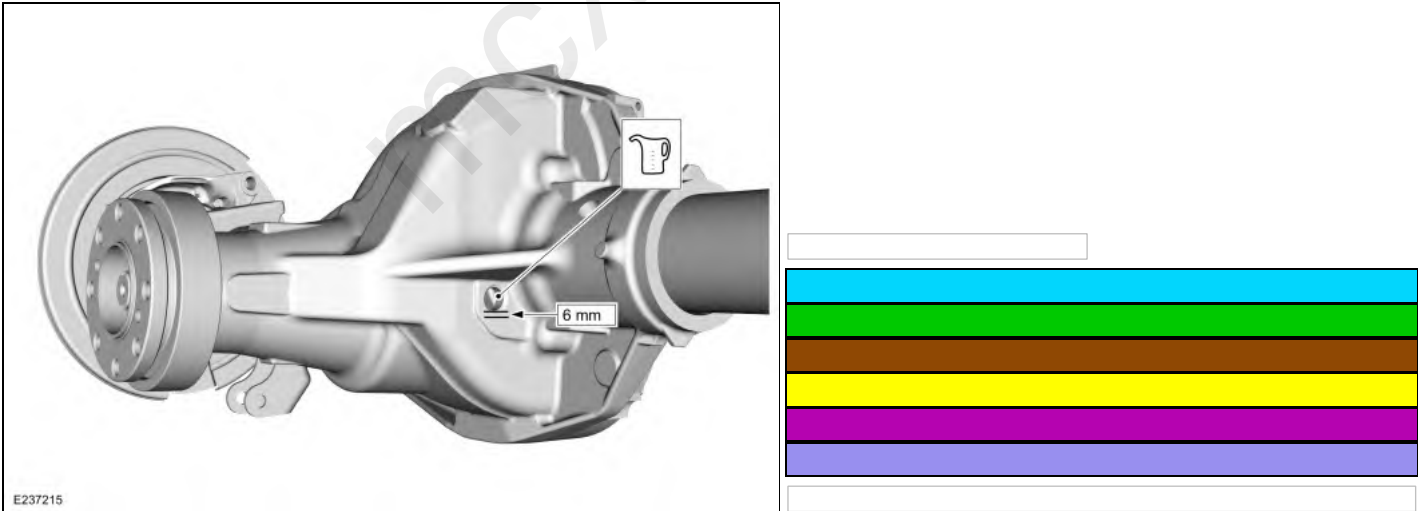

- Install the differential fluid fill plug.
Torque: 22 lb.ft (30 Nm)

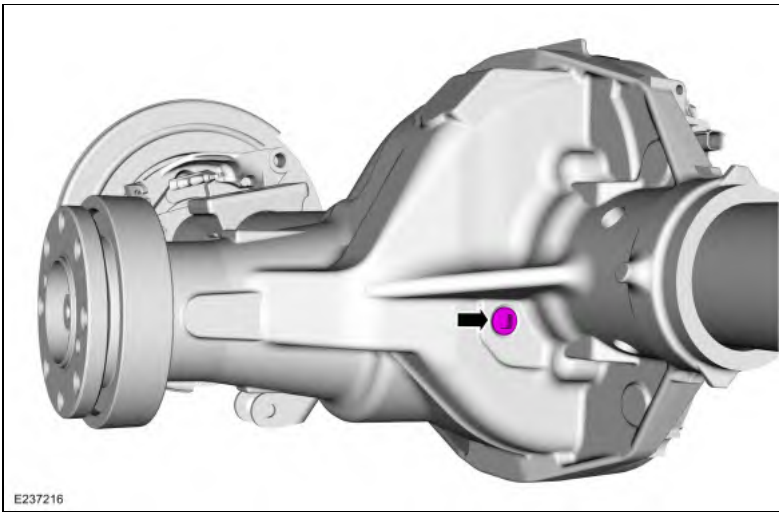

mcx30.com