

Brake Caliper Anchor Plate

Removal


NOTE: Removal steps in this procedure may contain installation details.

All vehicles

1. Remove the brake pads.
Refer to: Brake Pads - F-250/F-350 (206-04 Rear Disc Brake, Removal and Installation).
Refer to: Brake Pads - F-450/F-550 (206-04 Rear Disc Brake, Removal and Installation).


F250, F350

2. Remove the bolts and the anchor plate. Discard the bolts
Torque: 203 lb.ft (275 Nm)

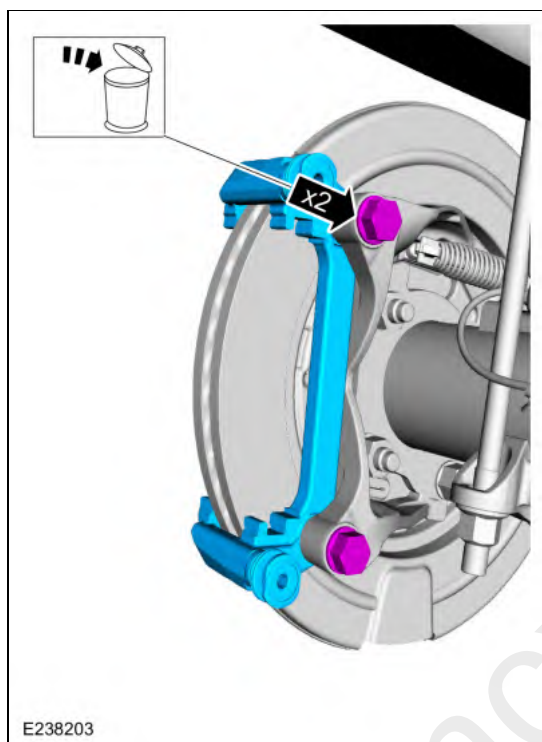

F450, F550

3. Remove the bolts and the anchor plate. Discard the bolts
Torque: 166 lb.ft (225 Nm)

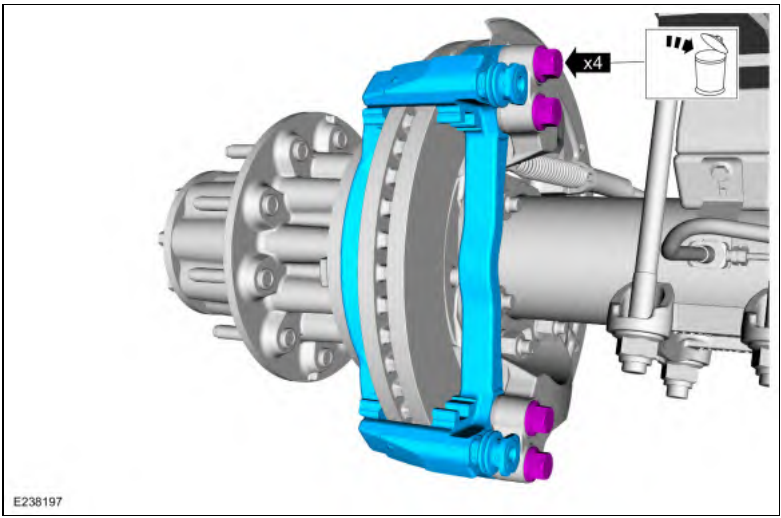

Installation

1. To install, reverse the removal procedure.