



Parking Brake Shoe Adjustment

Activation


1. With the Vehicle in NEUTRAL, position it on a hoist.
Refer to: Jacking and Lifting - Overview (100-02 Jacking and Lifting, Description and Operation).
2. Remove the backing plate plug.

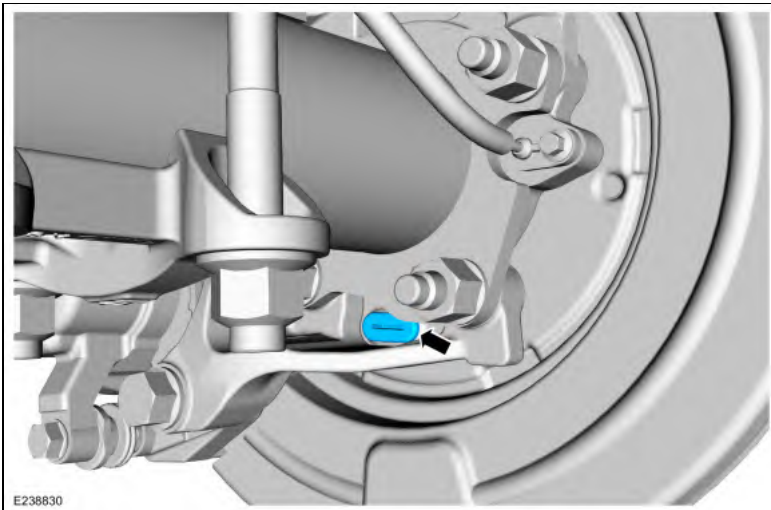

3. Turn the brake adjuster screw to expand the parking brake shoe and linings until they drag against the drum-in-hat brake disc and then back off the brake adjuster screw until no drag is evident.

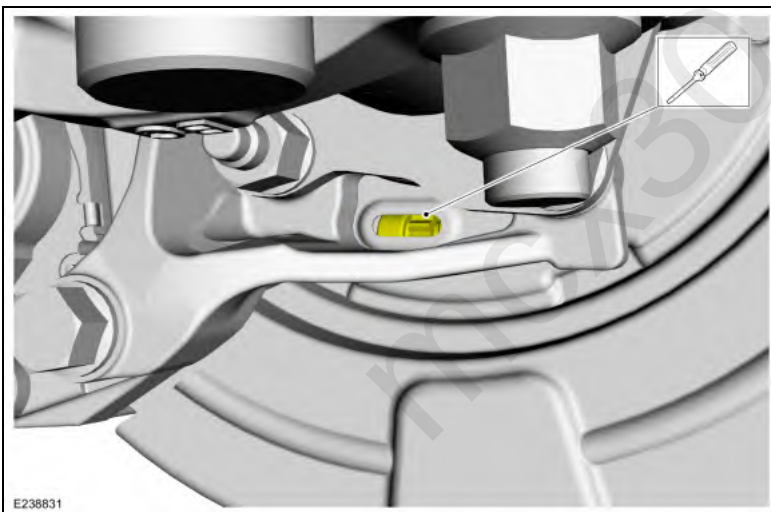

4. Install the backing plate plug.

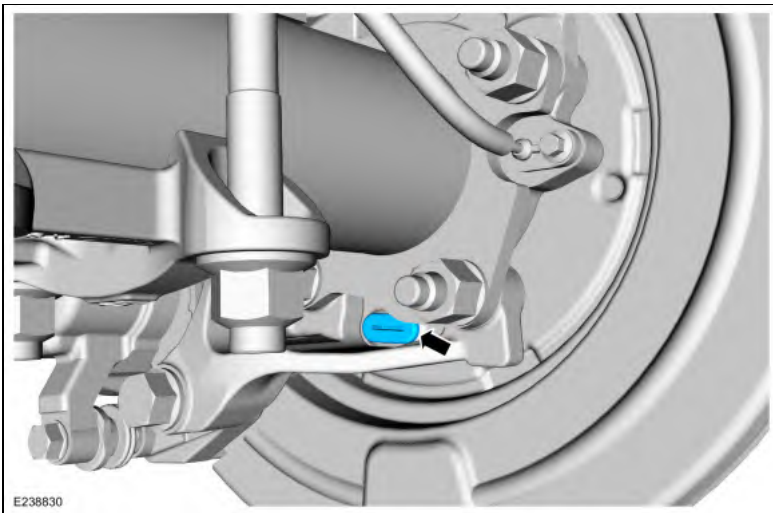

mcx30.com