


Wheel Speed Sensor Ring - Vehicles With: Dual Rear Wheels

Removal

1. Remove the differential carrier.
Refer to: Differential Carrier (205-02B Rear Drive Axle/Differential - Vehicles With: Dana M300, Removal and Installation).
2. Rotate counter clockwise and remove the backlash adjuster/wheel speed sensor tone ring assembly.

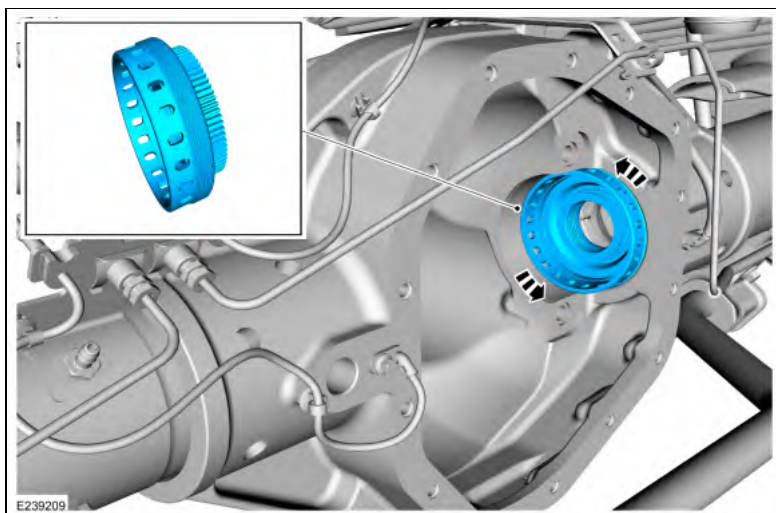

Installation

1. To install, reverse the removal procedure.