






Oil Pressure Feedback Tube

Removal

1. Remove the oil pump screen and pickup tube.
Refer to: Oil Pump Screen and Pickup Tube (303-01B Engine - 6.7L Power Stroke Diesel, Removal and Installation).
2. Remove the bolt and the oil pressure feedback tube.

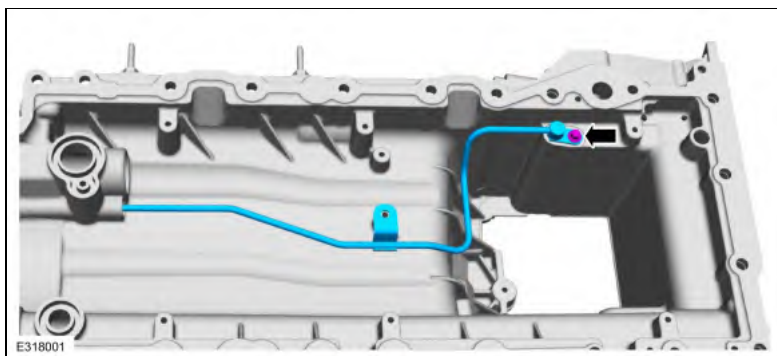

3. Remove and discard the O-ring seals.

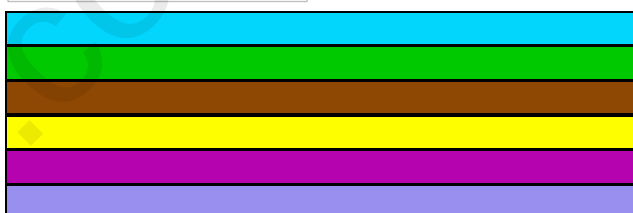
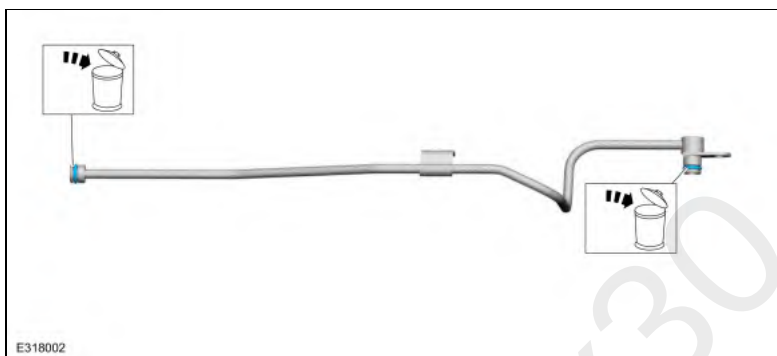


Installation

1. Install new O-ring seals on the oil pressure feedback tube and lubricate clean engine oil.
Refer to: Specifications (303-01A Engine - 6.2L V8, Specifications).



2. Install the oil pressure feedback tube and the bolt.
Torque: 89 lb.in (10 Nm)

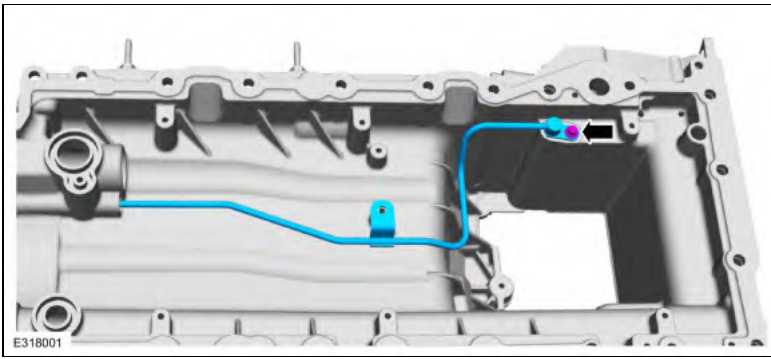

3. Install the oil pump screen and pickup tube.
Refer to: Oil Pump Screen and Pickup Tube (303-01B Engine - 6.7L Power Stroke Diesel, Removal and Installation).

mcx30.com