


Push Rod


Removal

1. Remove the rocker arm.
Refer to: Rocker Arm (303-01C Engine - 7.3L 2V DEVCT V8 (239kW/320PS) (J0), Removal and Installation).
2. Remove the push rod.

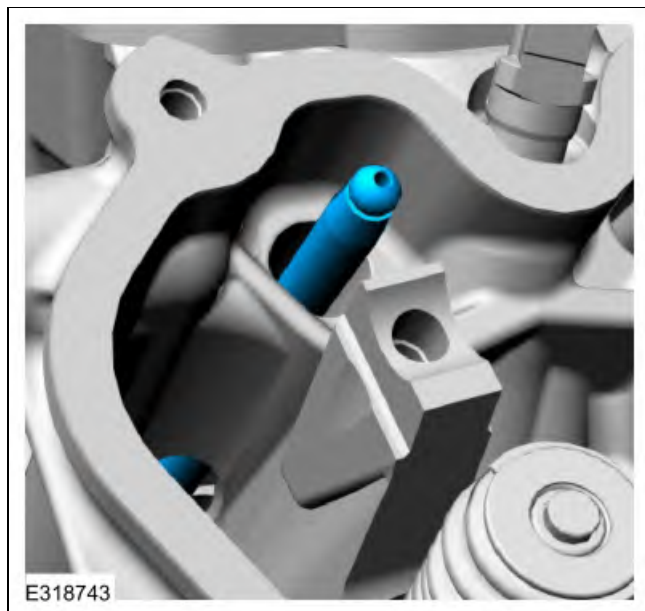


Installation

1. Lubricate the push rod with clean engine oil.

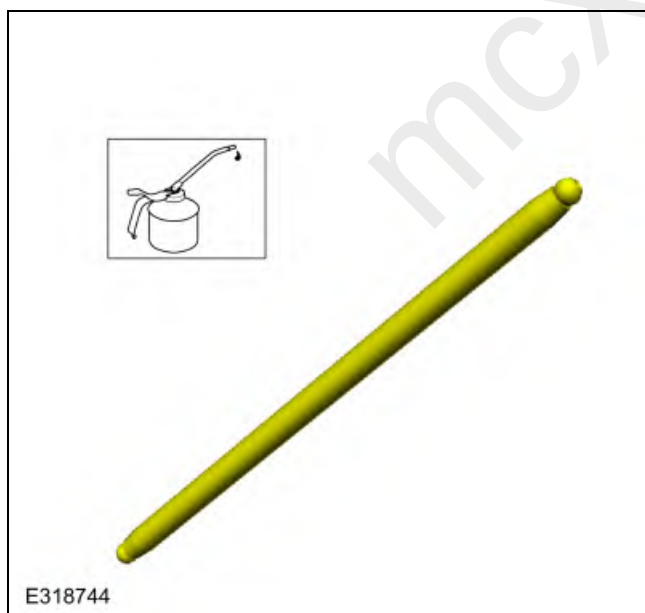

2. Install the push rod.

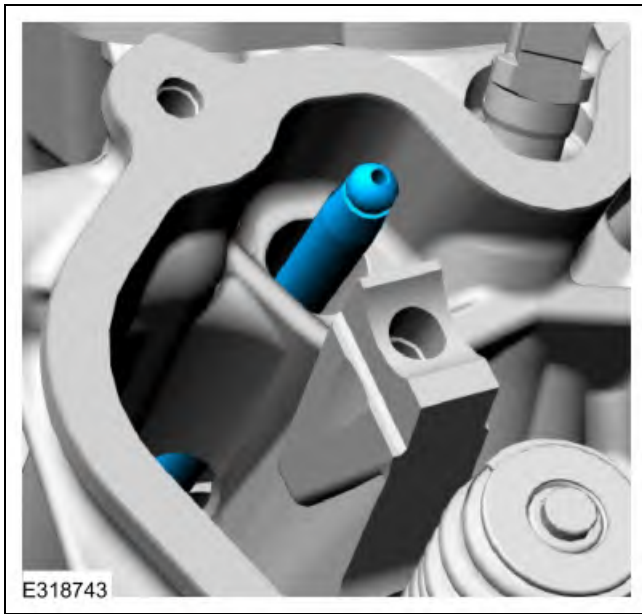

3. Install the rocker arm

Refer to: Rocker Arm (303-01C Engine - 7.3L 2V DEVCT V8 (239kW/320PS) (J0), Removal and Installation).