


Glow Plug Module


Removal

NOTE: The glow plug module is located above the right front fender splash shield.

1. Disconnect the battery.
Refer to: Battery Disconnect and Connect (414-01 Battery, Mounting and Cables, General Procedures).
2. Remove the right fender splash shield.
Refer to: Fender Splash Shield (501-02 Front End Body Panels, Removal and Installation).
3. Disconnect the glow plug module electrical connectors.

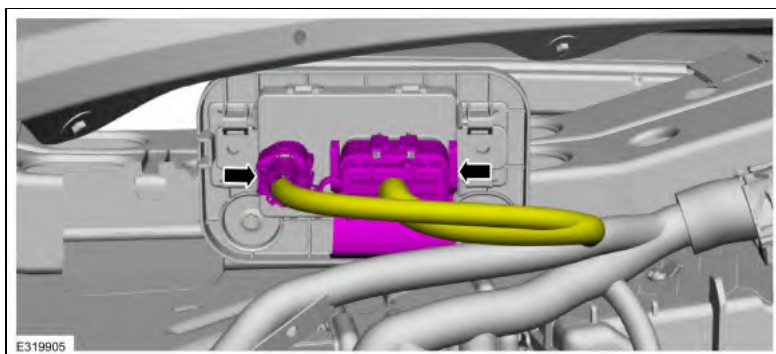


4. Release the clips and remove the glow plug module.

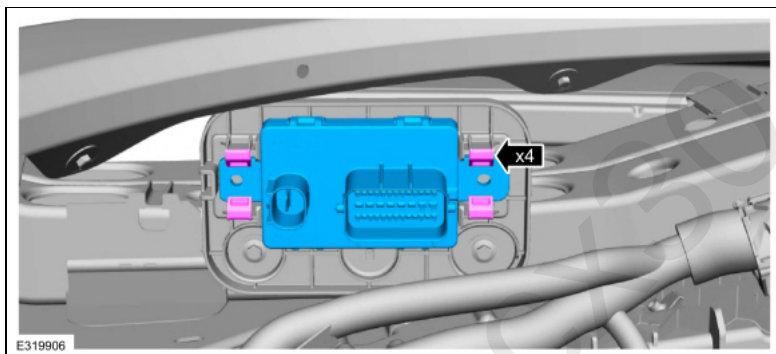


Installation

1. Install the glow plug module.

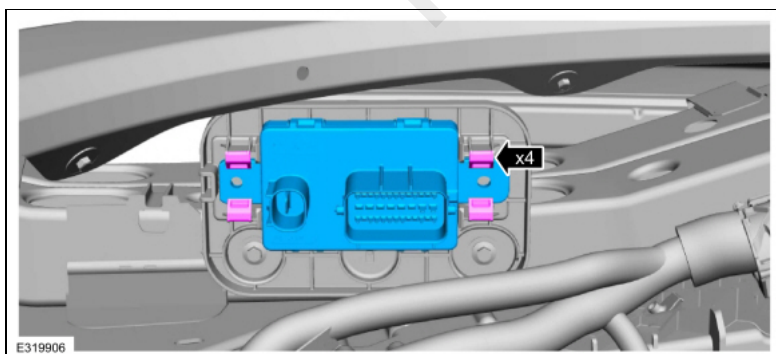

2. Connect the glow plug module electrical connectors.

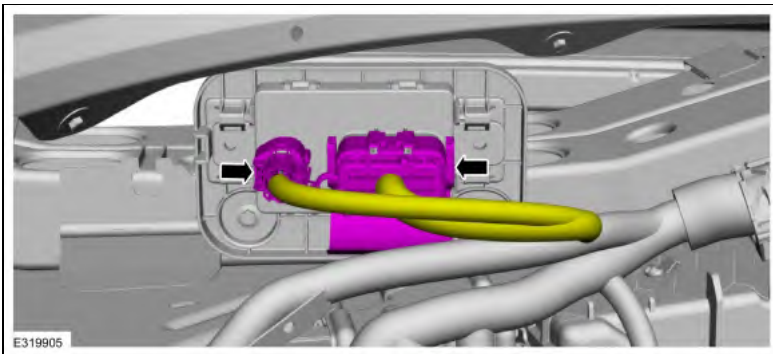

3. Install the right fender splash shield.
Refer to: Fender Splash Shield (501-02 Front End Body Panels, Removal and Installation).
 4. Connect the battery.
Refer to: Battery Disconnect and Connect (414-01 Battery, Mounting and Cables, General Procedures).
-

mcx30.com