


Charge Air Cooler (CAC) Intake Pipe

Removal

NOTICE: The turbocharger compressor vanes can be damaged by even the smallest particles. When removing any turbocharger or engine air intake system component, ensure that no debris enters the system. Failure to do so may result in damage to the turbocharger.

NOTE: Removal steps in this procedure may contain installation details.

1.
 1. Release the spring clip up until the end of the clip is in the detent of the quick connect coupling.
 2. Loosen the clamp and remove the CAC intake pipe.
Torque: 106 lb.in (12 Nm)

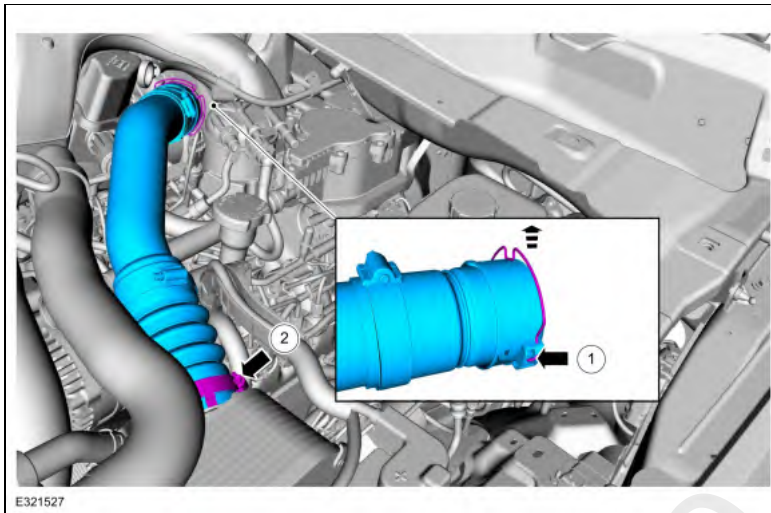

Installation

1. Inspect the turbocharger or engine air intake system components and clean, if necessary.
2. To install, reverse the removal procedure.