

Camshaft Position (CMP) Sensor


Materials

Name	Specification
Motorcraft® SAE 5W-30 Synthetic Blend Motor Oil / XO-5W30-QSP	WSS-M2C946-A

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the intake manifold.
Refer to: Intake Manifold (303-01A Engine - 6.2L V8, Removal and Installation).
2. Disconnect the electrical connector, remove the bolt and the CMP sensor.
Material: Motorcraft® SAE 5W-30 Synthetic Blend Motor Oil / XO-5W30-QSP (WSS-M2C946-A)
Torque: 89 lb.in (10 Nm)

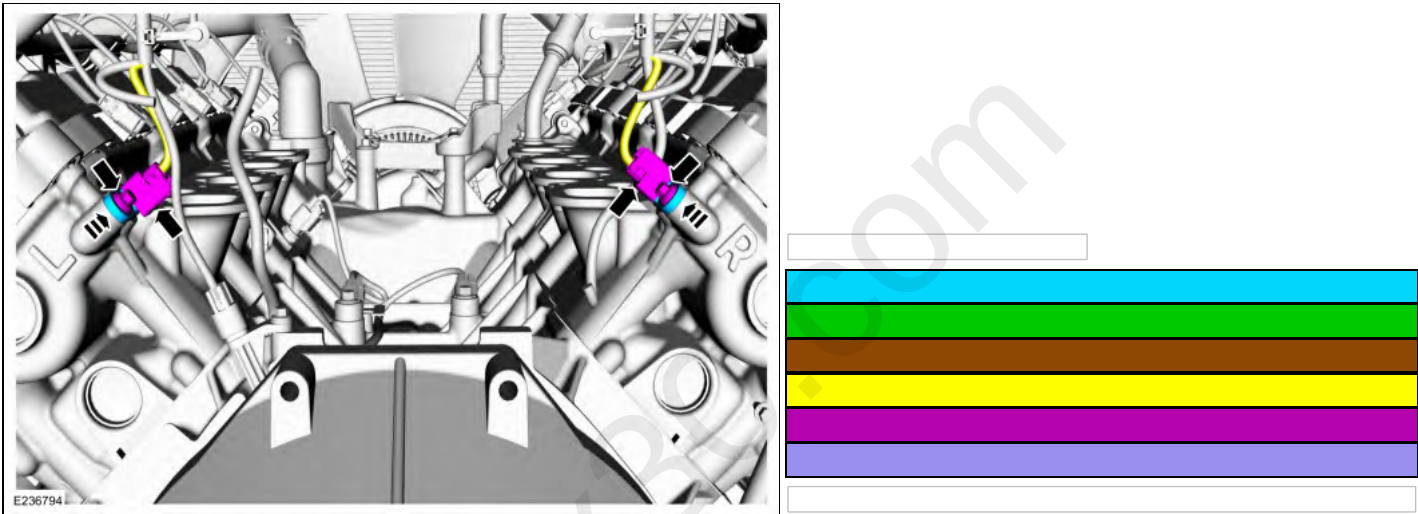

Installation

NOTE: Before installation, lubricate the CMP sensor O-ring seal with clean engine oil.

1. To install, reverse the removal procedure.