


Clutch Pedal Position (CPP) Switch

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the CPP switch.
 1. Disconnect the CPP switch electrical connector.
 2. Remove the wiring harness retainer and position aside the wiring harness.
 3. Pull outward the CPP switch, release the clips and remove the CPP switch cover. Remove the CPP switch from the clutch master cylinder push rod.

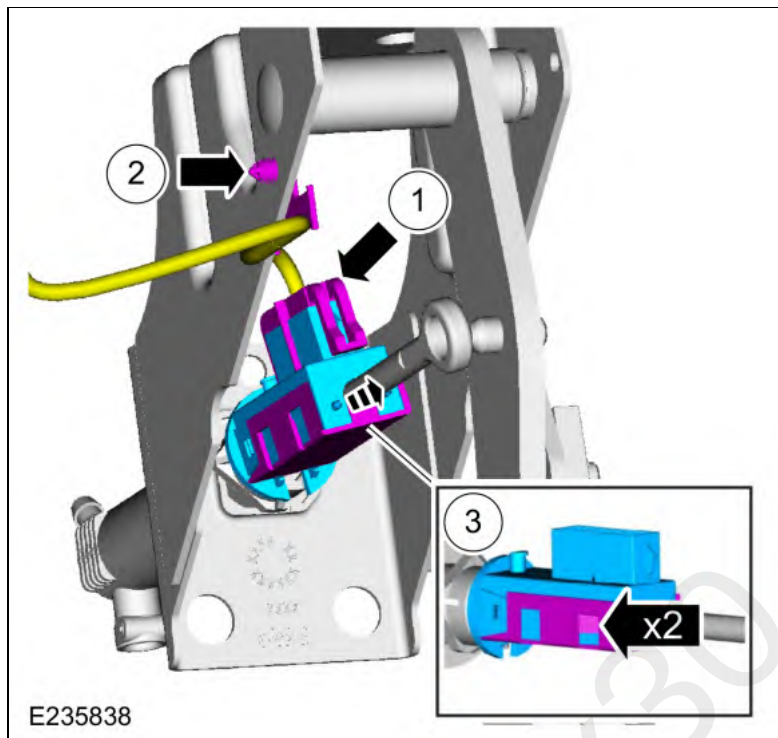

Installation

1. To install, reverse the removal procedure.