


Knock Sensor (KS)

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the intake manifold.
Refer to: Intake Manifold (303-01A Engine - 6.2L V8, Removal and Installation).
2. **NOTE:** Note the position of the components before removal.
 - Disconnect the KS electrical connectors.
 - Remove the bolts and the KS.
Torque: 177 lb.in (20 Nm)

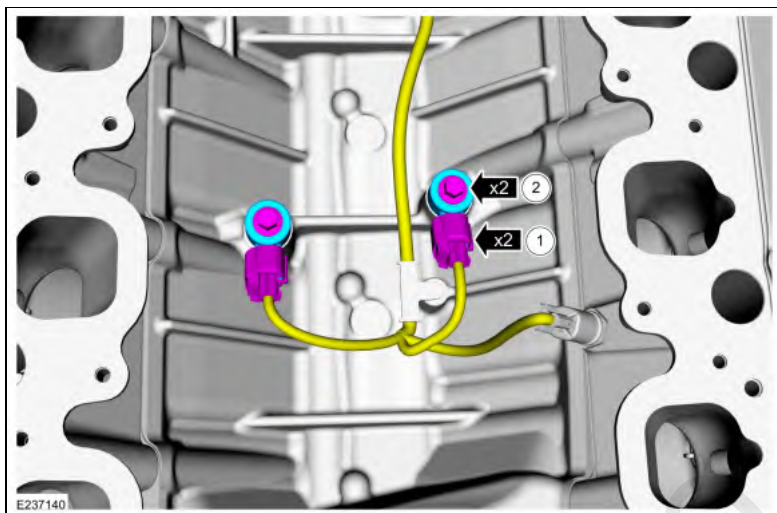

Installation

NOTE: Make sure that the components are installed to the position noted before removal.

1. To install, reverse the removal procedure.