

Camshaft Position (CMP) Sensor


Materials

Name	Specification
Motorcraft® SAE 10W-30 Super Duty Diesel Motor Oil XO-10W30-QSD	WSS-M2C171-E

Removal

NOTE: Removal steps in this procedure may contain installation details.

1. Remove the cooling fan.
Refer to: Cooling Fan (303-03B Engine Cooling - 6.7L Power Stroke Diesel, Removal and Installation).
2. Remove the bolt, disconnect the electrical connector and remove the CMP sensor.
Torque: 89 lb.in (10 Nm)

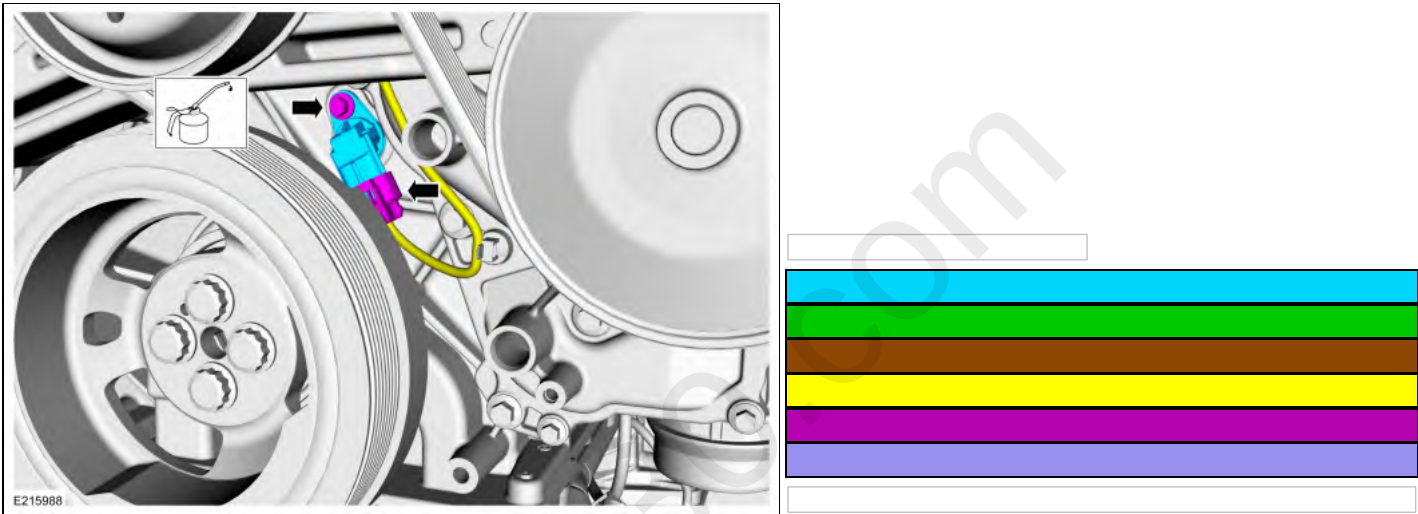

Installation

1.
- NOTE:** Before installation, lubricate the CMP sensor O-ring seal with clean engine oil.

To install, reverse the removal procedure.
Material: Motorcraft® SAE 10W-30 Super Duty Diesel Motor Oil / XO-10W30-QSD (WSS-M2C171-E)