


Removal and Installation

Special Tool(s) / General Equipment


	204-169 Clamping Tool, Boot Retaining Clamp
Boot Clamp Pliers	

Removal

1. Refer to: [Front Halfshaft RH](#) (205-04A Front Drive Halfshafts, Removal and Installation).
- 2.

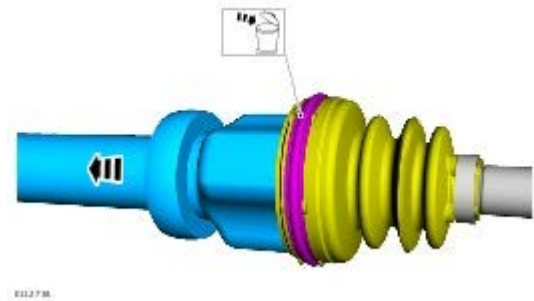


- 3.

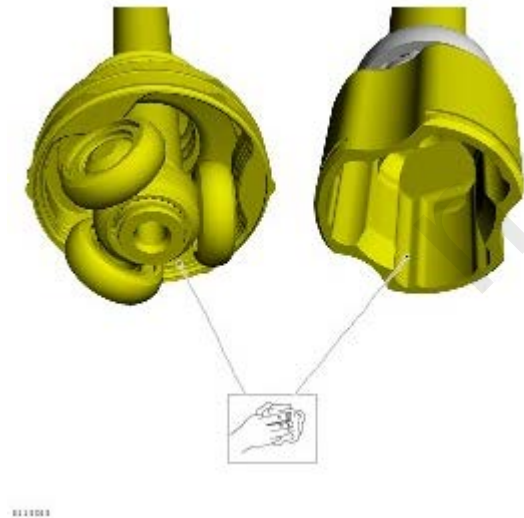



Installation

1. Refer to: [Specifications](#) (205-04A Front Drive Halfshafts, Specifications).

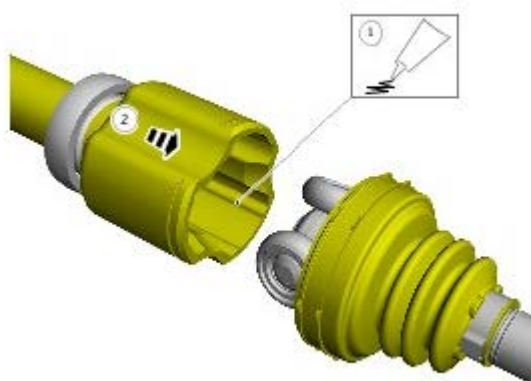


8112758

2. 1. Release any trapped air.

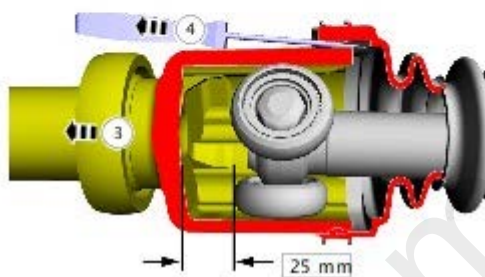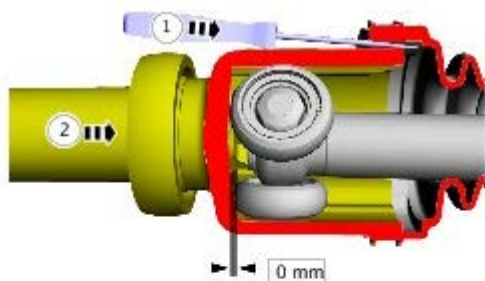

8112760

3. Use *Suggested Tool*: [204-169](#). Tool shown or a commercially available equivalent can be used.
Use the *General Equipment*: [Boot Clamp Pliers](#)
Torque: 21 Nm

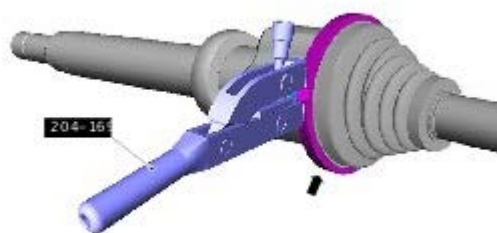

8203307

4. Refer to: [Front Halfshaft RH](#) (205-04A Front Drive Halfshafts, Removal and Installation).

mcx30.com