


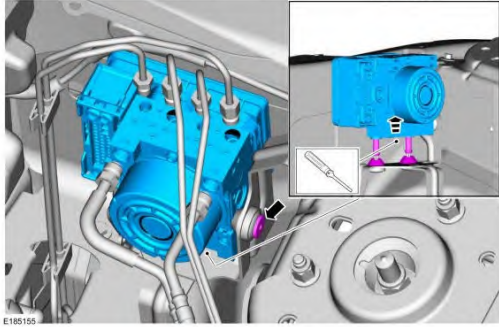

REMOVAL AND INSTALLATION > HYDRAULIC CONTROL UNIT (HCU) > INSTALLATION

1.

To install, reverse the removal procedure.

 **NOTE:** The following steps are necessary if a new HCU or ABS module was installed.

2.

Using a diagnostic scan tool, complete the PMI process for the ABS module following the on-screen instructions.

Carry out the IVD initialization using the scan tool and following the diagnostic scan tool on-screen instructions.

3.

Bleed the brake system. REFER to: Brake System Pressure Bleeding .

REMOVAL AND INSTALLATION > FRONT WHEEL SPEED SENSOR > REMOVAL

 **NOTE:** Removal steps in this procedure may contain installation details.

1.

Remove the wheel and tire. REFER to: Wheel and Tire .

2.

Remove the retainer and position aside the fender splash shield.