


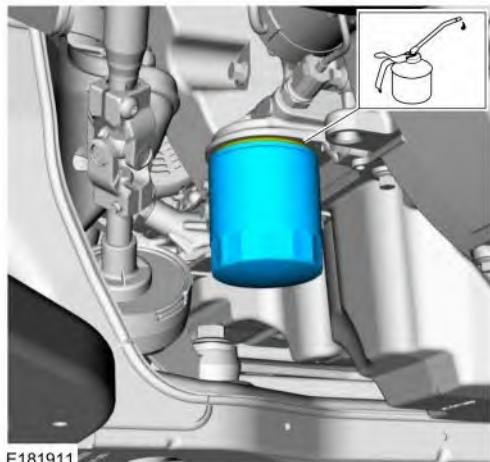


8.

Fill the engine with clean engine oil. Refer to: Specifications .

Material

: Motorcraft® SAE 5W-30 Premium Synthetic Blend Motor Oil (U.S.) / XO-5W30-QSP (U.S.) (WSS-M2C946-A)

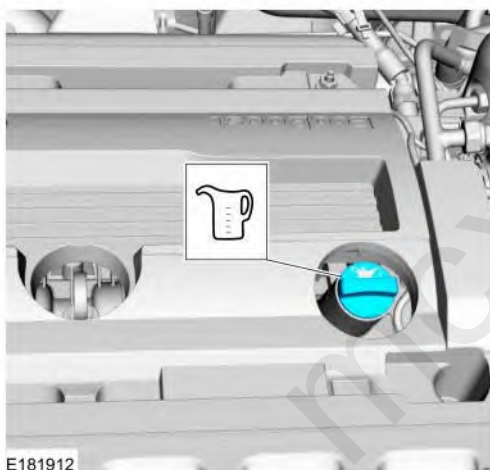

9.

Install the flexplate or flywheel. Refer to: Flexplate . Refer to: Flywheel .

REMOVAL AND INSTALLATION > CYLINDER HEAD

Special Tool(s) / General Equipment

Oil Drain Equipment

Hose Clamp Remover/Installer