


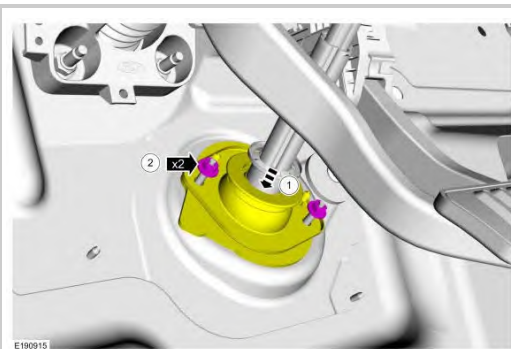


42.

Fill the engine with clean engine oil. Refer to: Specifications .

Material

: Motorcraft® SAE 5W-30 Premium Synthetic Blend Motor Oil (U.S.) / XO-5W30-QSP (U.S.) (WSS-M2C946-A)

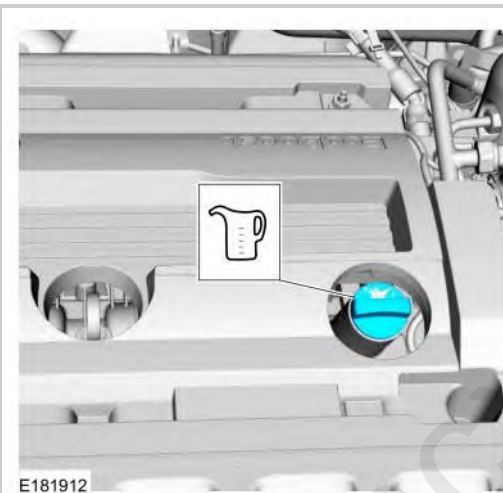

REMOVAL AND INSTALLATION > OIL PRESSURE SWITCH > REMOVAL



NOTE: Removal steps in this procedure may contain installation details.

1.

With the vehicle in NEUTRAL, position it on a hoist. Refer to: Jacking and Lifting - Overview .

2.

Disconnect the oil pressure switch electrical connector.