


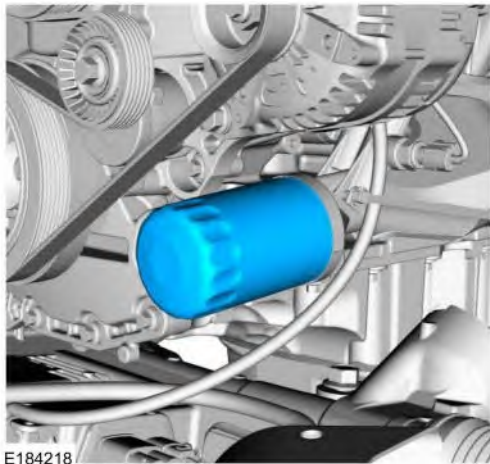


16.

Fill the engine with clean engine oil. Refer to: Specifications .

Material

: Motorcraft® SAE 5W-20 Premium Synthetic Blend Motor Oil (U.S.) / XO-5W20-QSP (U.S.)
(WSS-M2C945-A)

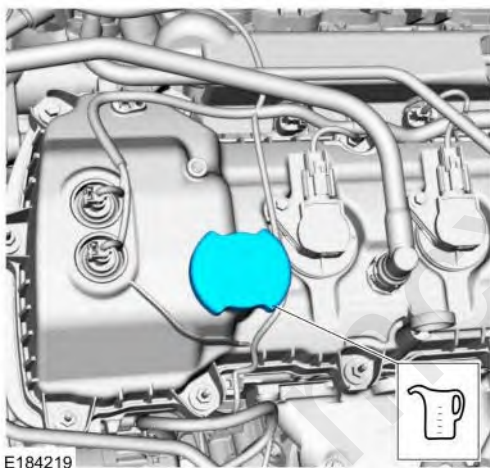

17.

Connect the battery ground. Refer to: Battery Disconnect and Connect .

18.

Start and check the exhaust system for leaks.

REMOVAL AND INSTALLATION > ENGINE FRONT COVER

Special Tool(s) / General Equipment