


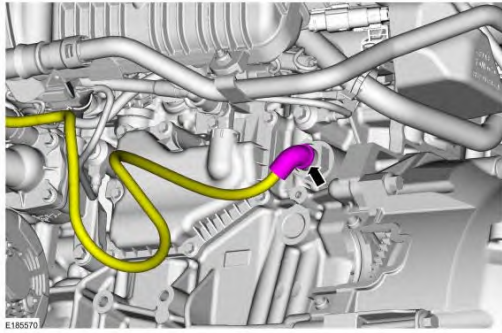


4.

Remove the block heater.

Torque

: 30 lb.ft (40 Nm)

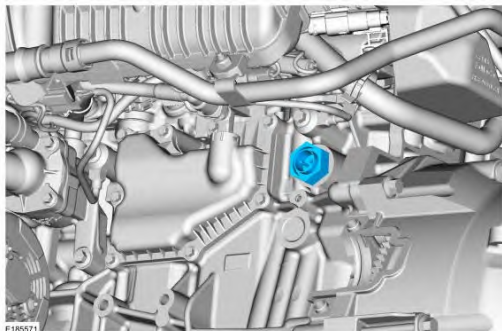

REMOVAL AND INSTALLATION > BLOCK HEATER > INSTALLATION

1.

To install, reverse the removal procedure.

2.

Fill and bleed the cooling system. Refer to: Cooling System Draining and Vacuum Filling .

REMOVAL AND INSTALLATION > COOLANT PUMP

Coolant Pump

Materials

Name	Specification
Motorcraft® Orange Antifreeze/Coolant Concentrated (U.S.) VC-3-B (U.S.)	WSS-M97B44-D