



Torque

: 53 lb.in (6 Nm)

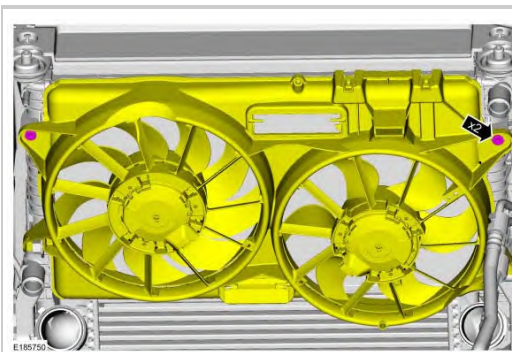

8.

Remove the cooling fan motor and shroud.

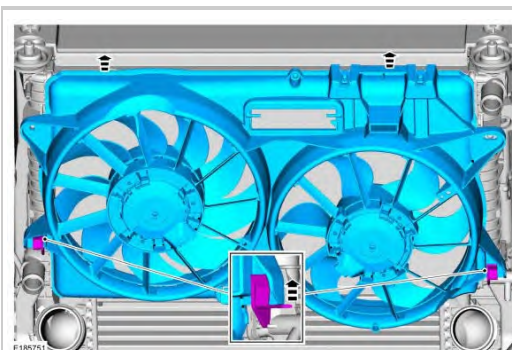

REMOVAL AND INSTALLATION > COOLING FAN MOTOR AND SHROUD > INSTALLATION

1.

To install, reverse the removal procedure.

2.

Fill and bleed the cooling system. Refer to: Cooling System Draining and Vacuum Filling .

REMOVAL AND INSTALLATION > DEGAS BOTTLE

Degas Bottle

Special Tool(s) / General Equipment

Fluid Suction Gun

Hose Clamp Remover/Installer