


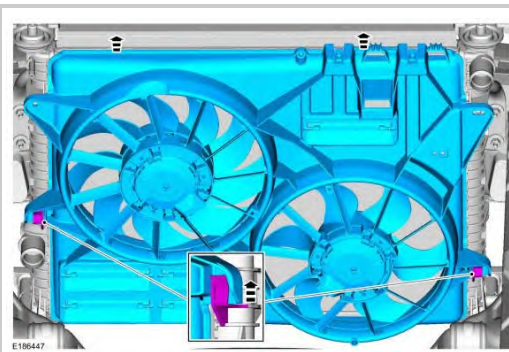

REMOVAL AND INSTALLATION > COOLING FAN MOTOR AND SHROUD > INSTALLATION

1.

To install, reverse the removal procedure.

REMOVAL AND INSTALLATION > DEGAS BOTTLE

Special Tool(s) / General Equipment

Fluid Suction Gun
Hose Clamp Remover/Installer
Locking Pliers

Materials

Name	Specification
Motorcraft® Orange Antifreeze/Coolant Prediluted (U.S.) VC-3DIL-B (U.S.)	WSS-M97B44-D2
Motorcraft® Orange Antifreeze/Coolant Concentrated (U.S.) VC-3-B (U.S.)	WSS-M97B44-D

REMOVAL AND INSTALLATION > DEGAS BOTTLE > REMOVAL

⚠ WARNING: Always allow the engine to cool before opening the cooling system. Do not unscrew the coolant pressure relief cap when the engine is operating or the cooling system is hot. The cooling system is under pressure; steam and hot liquid can come out forcefully when the cap is loosened slightly. Failure to follow these instructions may result in serious personal injury.




NOTE: Removal steps in this procedure may contain installation details.

1.



WARNING: When releasing the cooling system pressure, cover the coolant expansion tank cap with a thick cloth.

Remove the pressure relief cap.

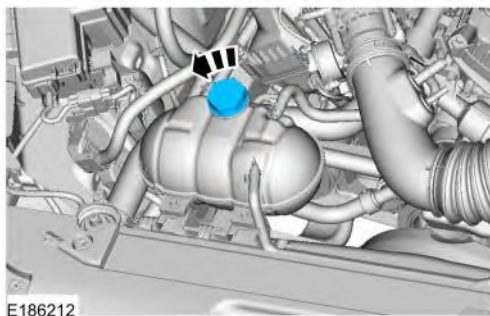


2.

Using general tools clamp the lower degas bottle hose and syphon the coolant from the degas bottle.

Use the General Equipment: Fluid Suction Gun

Use the General Equipment: Locking Pliers

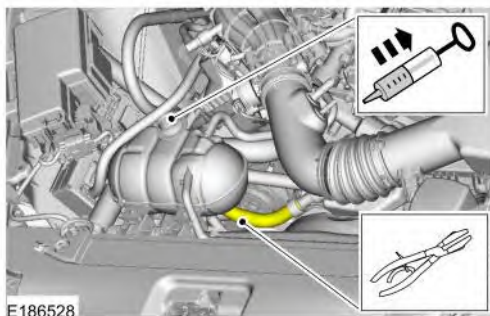

3.