


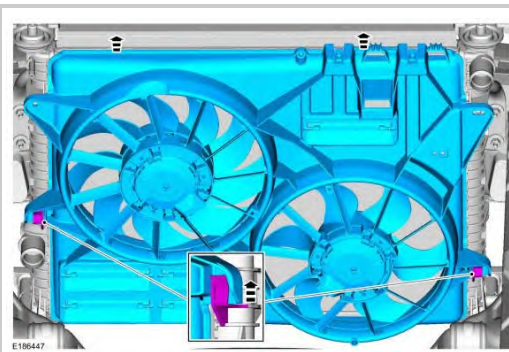

REMOVAL AND INSTALLATION > COOLING FAN MOTOR AND SHROUD > INSTALLATION

1.

To install, reverse the removal procedure.

REMOVAL AND INSTALLATION > DEGAS BOTTLE

Special Tool(s) / General Equipment

Fluid Suction Gun
Fluid Suction Gun Hose Clamp Remover/Installer
Locking Pliers

Materials

Name	Specification
Motorcraft® Orange Antifreeze/Coolant Prediluted (U.S.) VC-3DIL-B (U.S.)	WSS-M97B44-D2
Motorcraft® Orange Antifreeze/Coolant Concentrated (U.S.) VC-3-B (U.S.)	WSS-M97B44-D

REMOVAL AND INSTALLATION > DEGAS BOTTLE > REMOVAL

⚠ WARNING: Always allow the engine to cool before opening the cooling system. Do not unscrew the coolant pressure relief cap when the engine is operating or the cooling system is hot. The cooling system is under pressure; steam and hot liquid can come out forcefully when the cap is loosened slightly. Failure to follow these instructions may result in serious personal injury.