


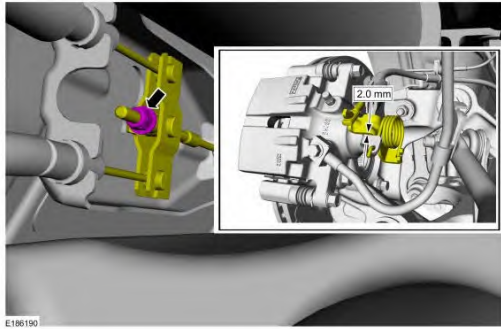

2.

Tighten the parking brake cable adjustment nut until one or both caliper levers are 2.0 mm off of their stops. Use the General Equipment: Feeler Gauge


3.

Fully apply and release the parking brake 5 times



4.

Tighten the parking brake cable adjustment nut until one or both caliper levers are 1.0 mm off of their stops. Use the General Equipment: Feeler Gauge

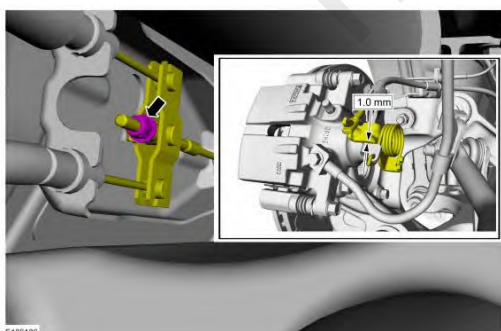

GENERAL PROCEDURES > PARKING BRAKE CABLE ADJUSTMENT - VEHICLES WITH: SVT PERFORMANCE PACKAGE

Adjustment