


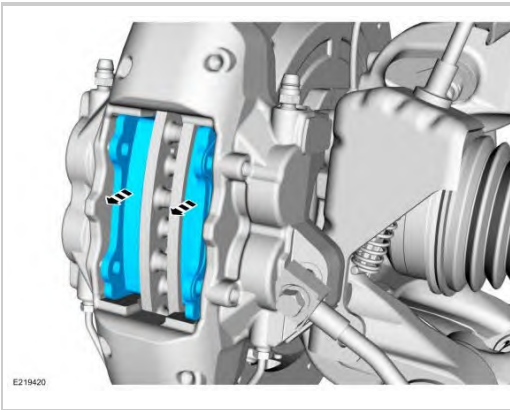

REMOVAL AND INSTALLATION > BRAKE PADS - VEHICLES WITH: SVT PERFORMANCE PACKAGE > INSTALLATION

1.

To install, reverse the removal procedure.

2.

Depress the brake pedal, check the brake fluid level in the brake fluid reservoir and top up as necessary with brake fluid. Refer to: Specifications .

REMOVAL AND INSTALLATION > REAR BRAKE FLEXIBLE HOSE - VEHICLES WITH: SVT PERFORMANCE PACKAGE > REMOVAL



NOTE: Make sure that all openings are sealed.



NOTE: If the fluid is spilled on the paintwork, the affected area must be immediately washed down with cold water.



NOTE: Removal steps in this procedure may contain installation details.

1.

With the vehicle in NEUTRAL, position it on a hoist. Refer to: Jacking and Lifting - Overview .

2.

Remove the brake caliper flow bolt and disconnect the brake hose from the brake caliper. Discard the washers.

Torque