


: 62 lb.in (7 Nm)

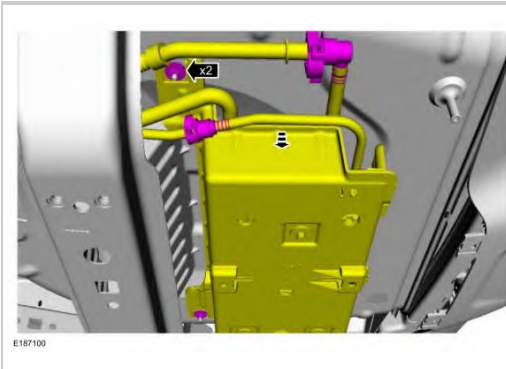


7.

1.

Disconnect the EVAP canister quick connect couplings. Refer to: QUICK RELEASE COUPLING .

2.

Disconnect the vent hose and remove the EVAP canister.

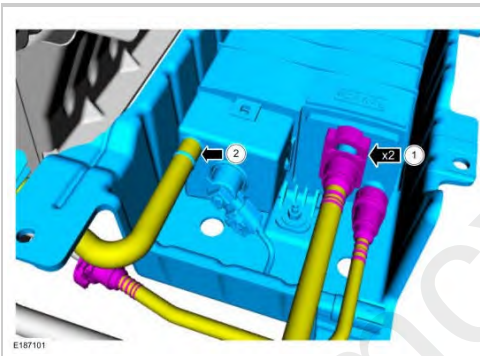

REMOVAL AND INSTALLATION > EVAPORATIVE EMISSION CANISTER > INSTALLATION

1.

To install, reverse the removal procedure.

REMOVAL AND INSTALLATION > EVAPORATIVE EMISSION CANISTER PURGE VALVE > REMOVAL



WARNING: Do not smoke, carry lighted tobacco or have an open flame of any type