

Description and Operation

General information



E147027

Item	Description
1	Steel wheel rims (15" and 16")
2	Aluminum alloy rims (16")
3	Aluminum alloy rims (18")

Tire and wheel rim combinations

The following tire and wheel rim combinations are available:

- 6.5J x 15 steel wheel rim
 - 215/65 R15C 104/102 T
- 6.5J x 16 steel or aluminum alloy wheel rim
 - 215/65 R16C 109/107 R
- 7.5J x 18 aluminum alloy wheel rim
 - 235/50 R18 101 W


Use of snow chains

If your vehicle has 215/65 R 16 C or 235/50 R 18 tires, fit 185/75 R 16 C tires to the front wheels. Pump up the tires to the maximum permitted tire pressure.

Before fitting the snow chains, the tire pressure must be increased to the maximum permitted value for this tire size. In addition, only fine-linked snow chains are allowed to be used.

NOTE: The tire size 185/75 R 16 C is only permitted to be mounted on the front axle.

Spare wheel

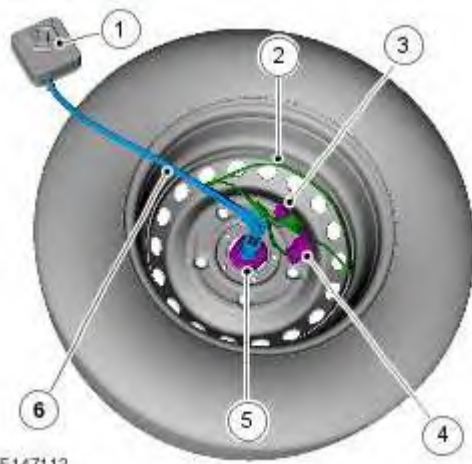

Item	Description
1	Winch
2	Safety cable
3	Bracket, wheel-side safety cable
4	Bracket, vehicle-side safety cable
5	Retaining plate, spare wheel
6	Winch cable