

Removal and Installation


Special Tool(s) / General Equipment

	303-1596 Installer, Stretchy Belt
6 mm Drill Bit	


Removal

NOTE: Removal steps in this procedure may contain installation details.


1. Refer to: [Jacking and Lifting](#) (100-02 Jacking and Lifting, Description and Operation).
2. *Torque:* 10 Nm

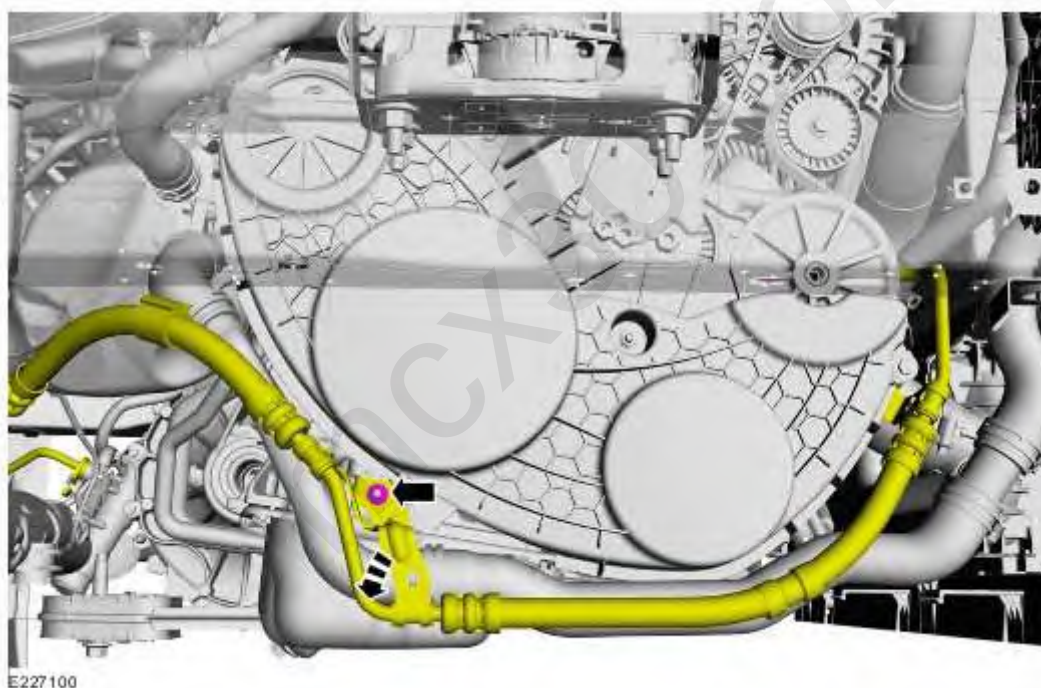


3. *Torque:*
 - 1: 10 Nm
 - 2: 10 Nm
 - 3: 9 Nm

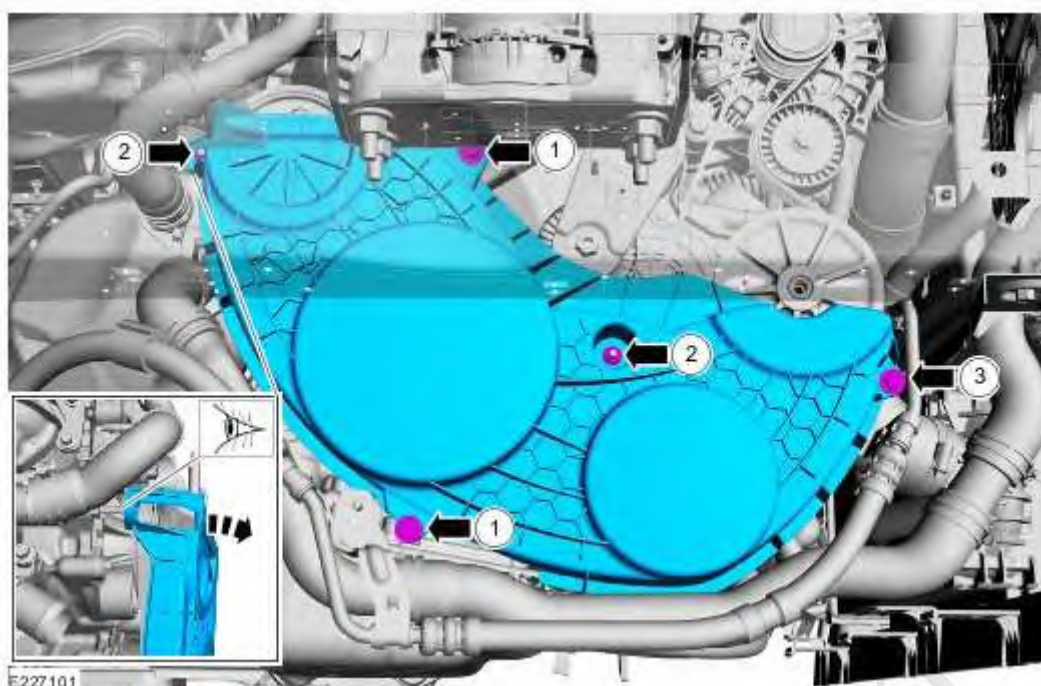

4.

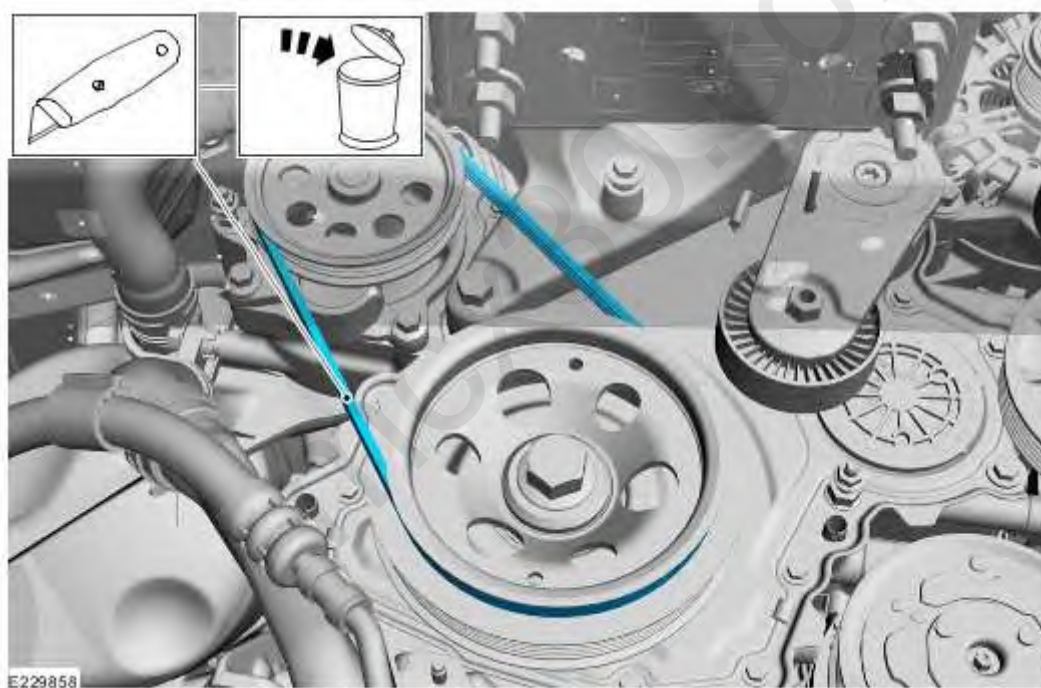


5. Use the General Equipment: 6 mm Drill Bit

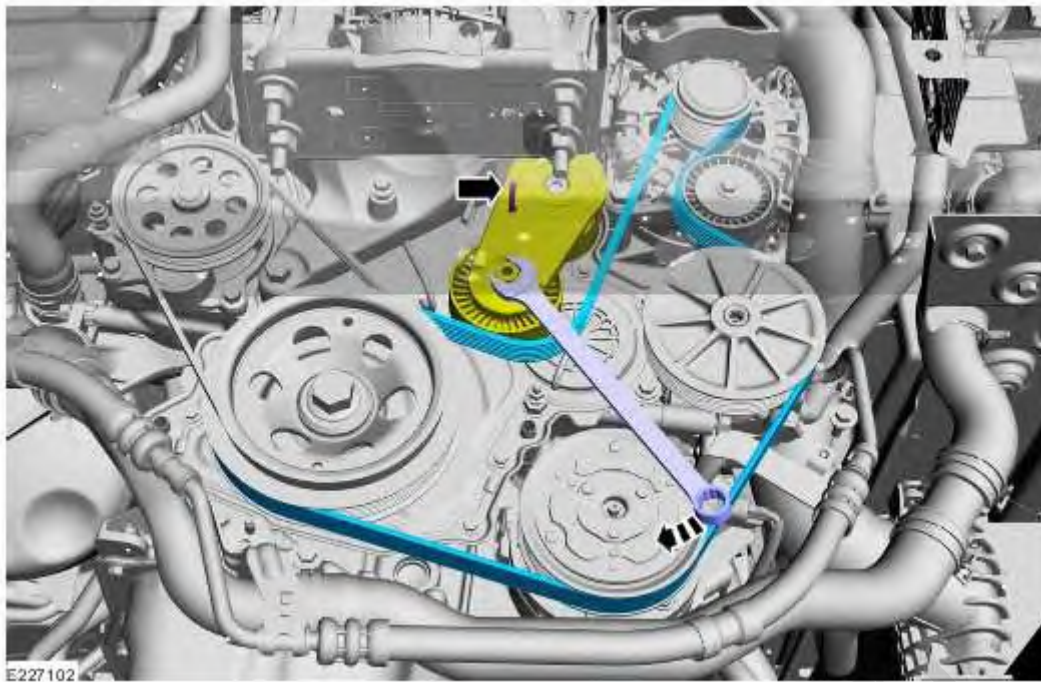

Installation

1. To install, reverse the removal procedure.
2. *Use Suggested Tool:* [303-1596](#). Tool shown or a commercially available equivalent can be used.

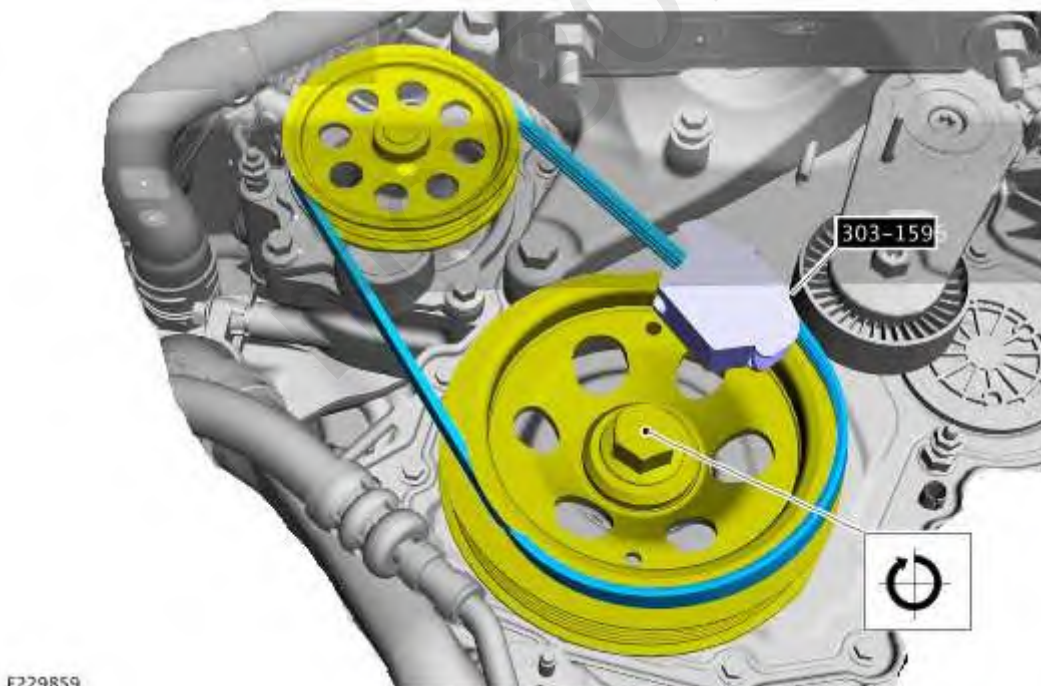

- 3.

