

Removal and Installation

General Equipment

Cable Ties


Materials

Name	Specification
Refrigerant Oil	WSH-M1C231-B


Removal

NOTE: Removal steps in this procedure may contain installation details.


1. Refer to: [Air Conditioning \(A/C\) System Recovery, Evacuation and Charging](#) (412-00 Climate Control System - General Information, General Procedures).
2. Refer to: [Front Bumper Cover](#) (501-19 Bumpers, Removal and Installation).
3. Use the General Equipment: [Cable Ties](#)

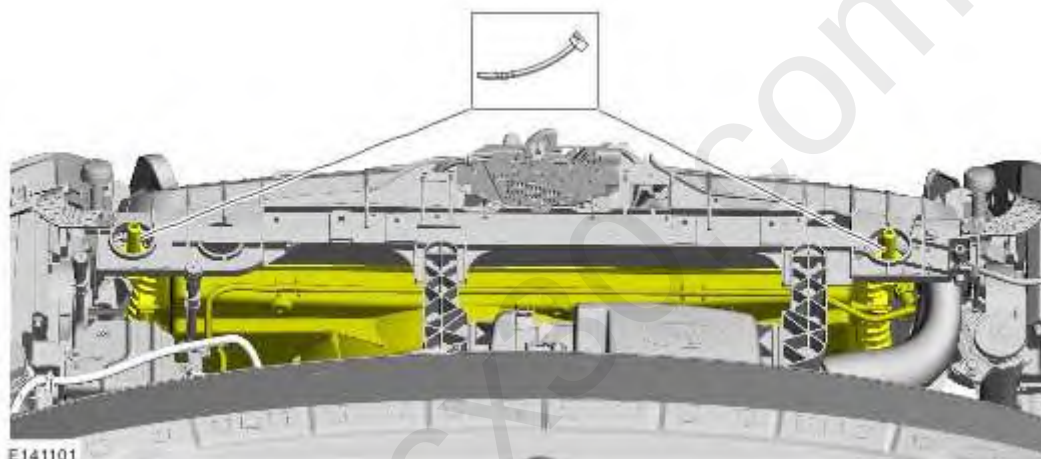


4. On both sides.

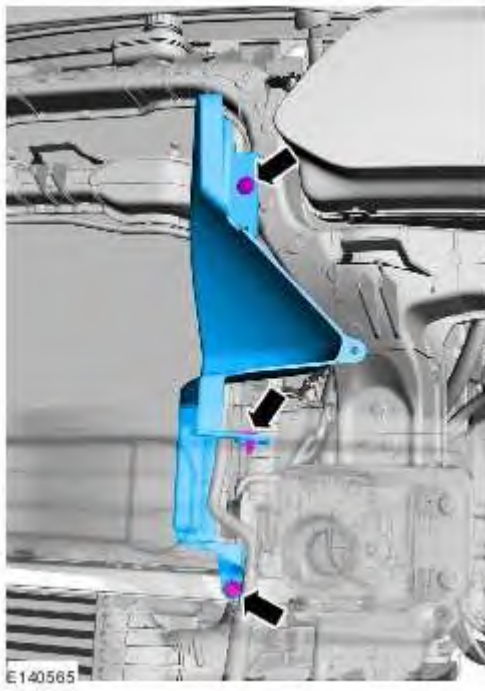


5.

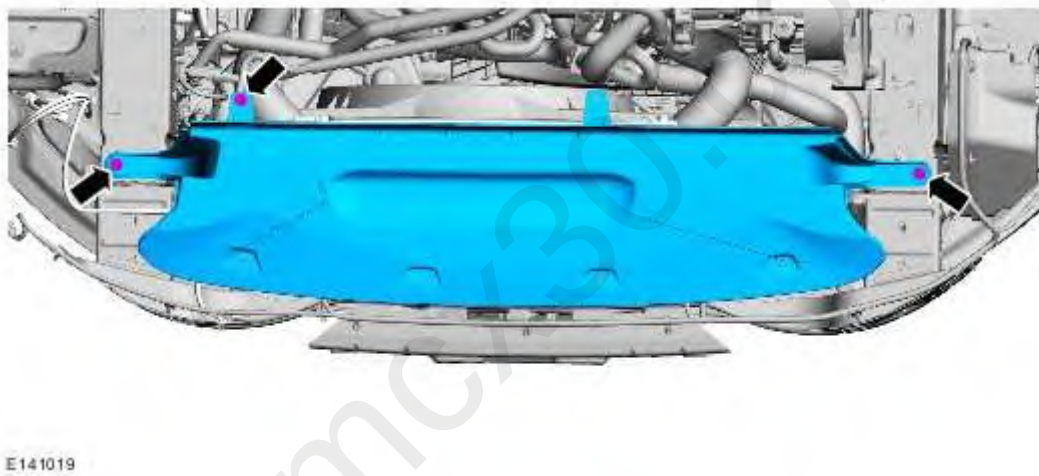

6. Torque: 25 Nm

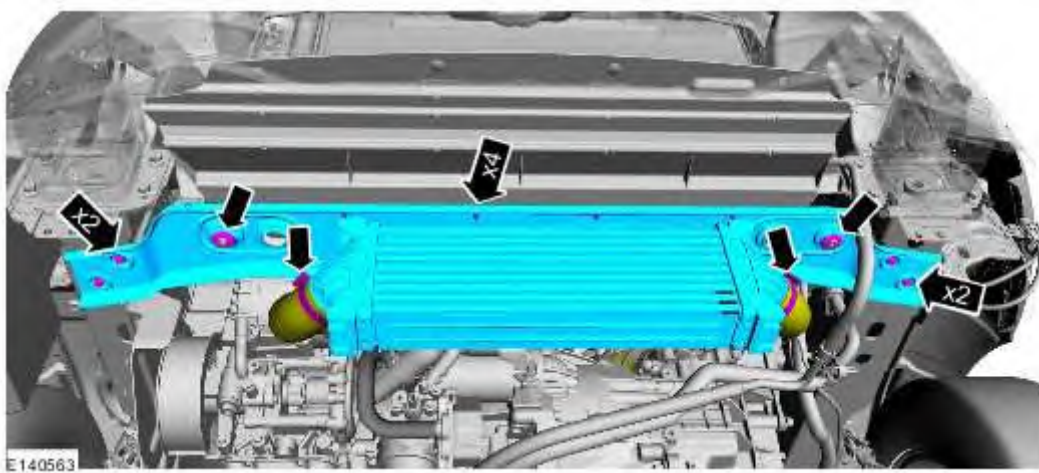


7.

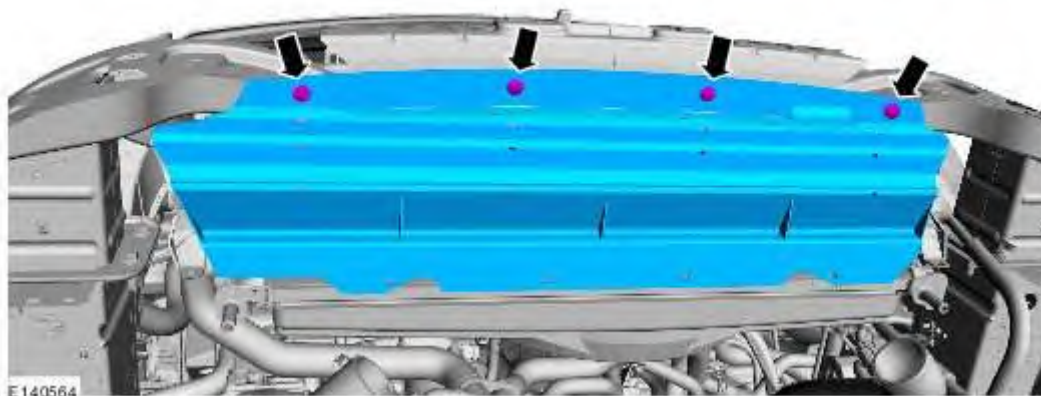

8.  **NOTICE:** Make sure that all openings are sealed.

1. Torque: 8 Nm

2. Torque: 8 Nm

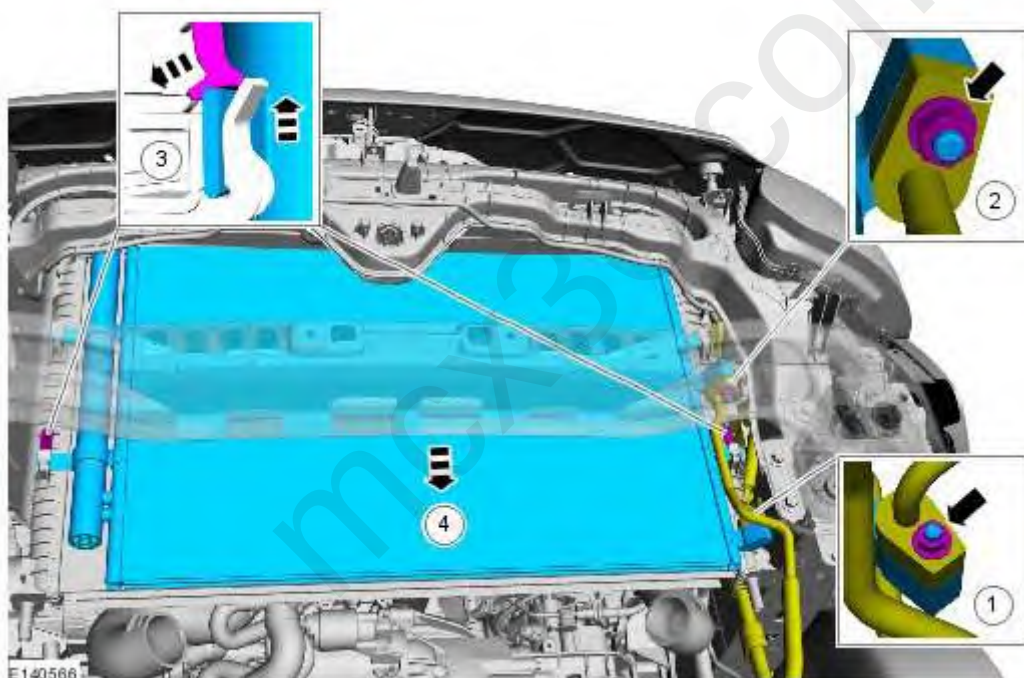

Installation

1.  **NOTICE:** Only use the specified material to lubricate the seals.
To install, reverse the removal procedure.

Material: WSH-M1C231-B (Refrigerant Oil)