

Removal and Installation

General Equipment

Hog Ring Plier


Removal

NOTE: Removal steps in this procedure may contain installation details.


1. Refer to: [Front Seat](#) (501-10A Front Seats, Removal and Installation).

Vehicles without power seats

- 2.

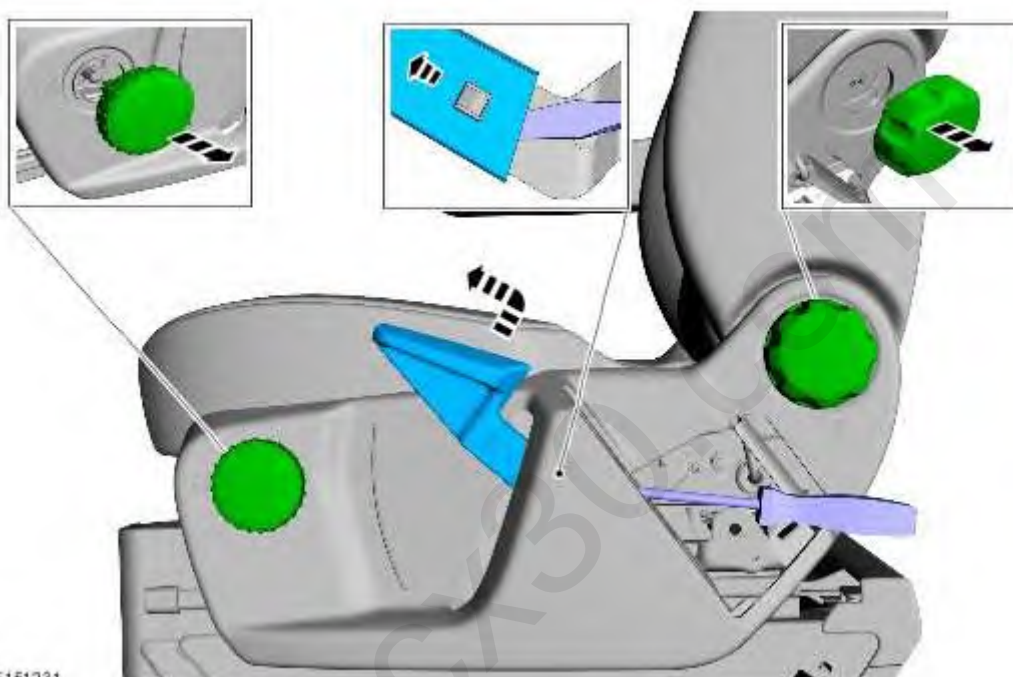


3. Torque: 3 Nm

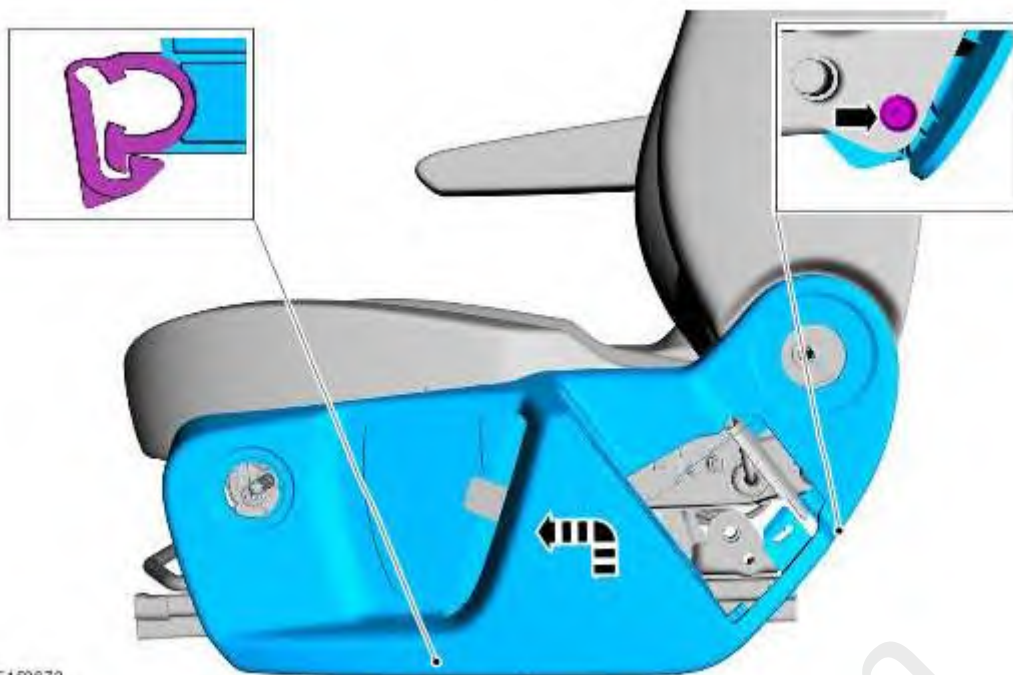

E159672

Vehicles with power seats


4. Torque: 3 Nm

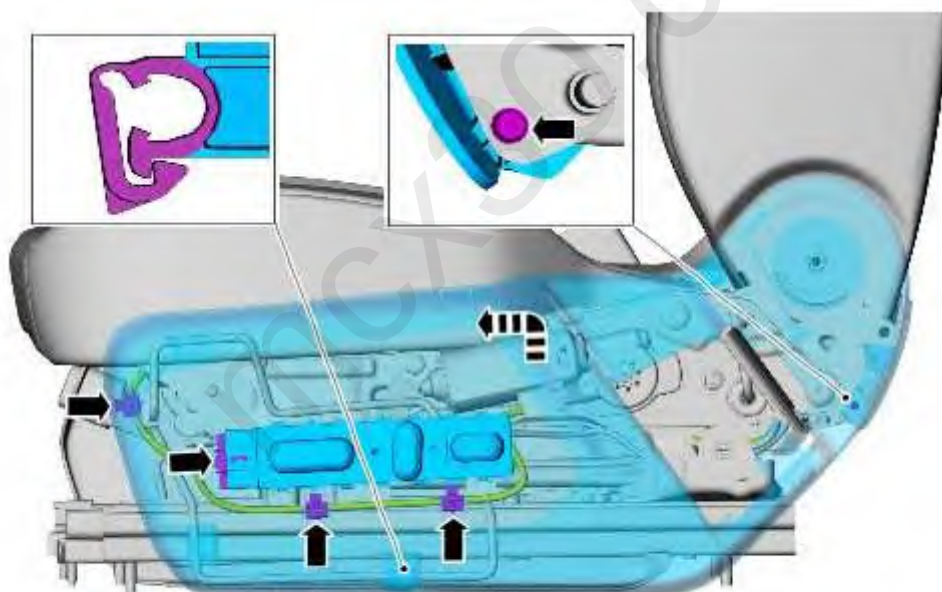

E151230

All vehicles

5. Torque: 3 Nm

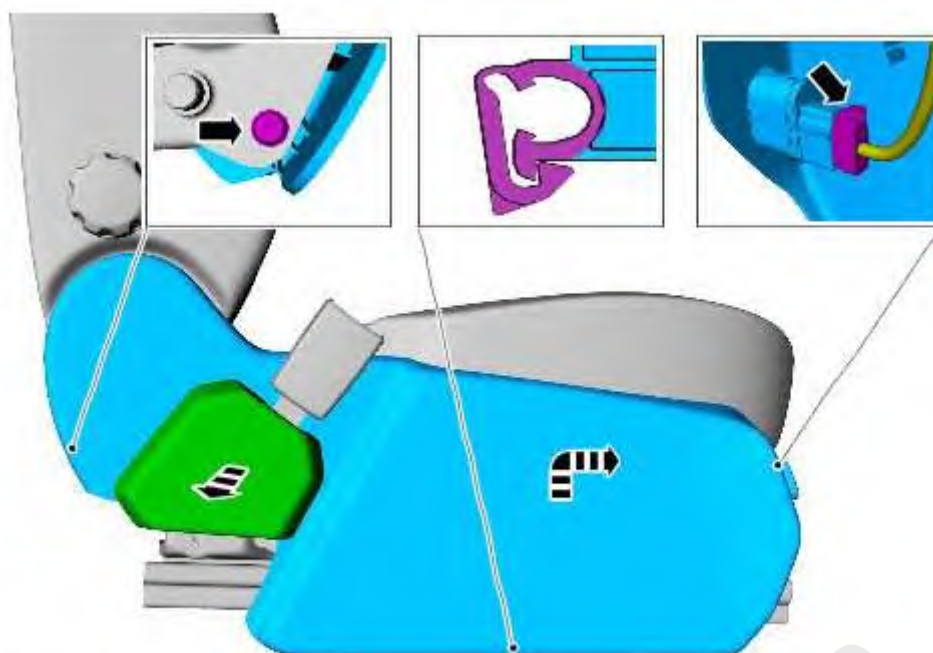


E151229

6.



E151244

7. If equipped.

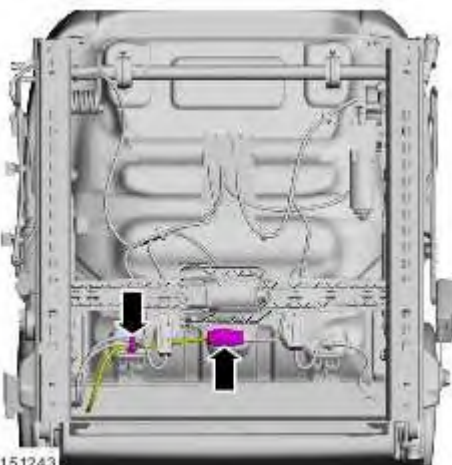


E151243

8.



E151625


9.

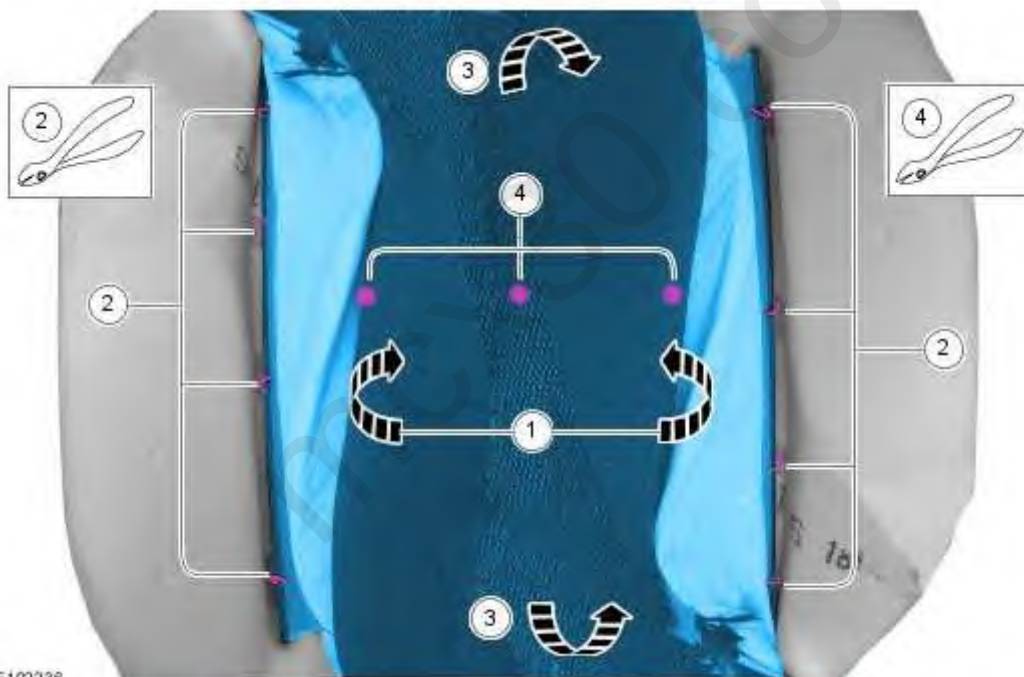

E102236

Installation

1. To install, reverse the removal procedure.
2. Use the General Equipment: [Hog Ring Plier](#)

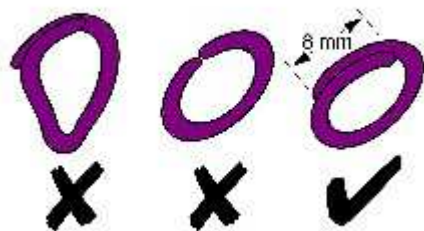

V4001063

mcx30.com