

### Removal and Installation

#### General Equipment

Blind Rivet Gun

Electric Drill

#### Removal

##### WARNINGS:



After the power supply has been disconnected, wait for a minimum of 3 minutes before disconnecting or removing any pyrotechnic components.



Make sure that the vehicle electrical system is fully depowered and no other power source is connected.

NOTE: Removal steps in this procedure may contain installation details.

1. Refer to: [Battery Disconnect and Connect](#) (414-01 Battery, Mounting and Cables, General Procedures).
2. Refer to: [Front Head Restraint Guide Sleeve](#) (501-10A Front Seats, Removal and Installation).
3. *Torque:* 40 Nm




4. *Torque:* 47 Nm




5. Torque: 2 Nm




6.

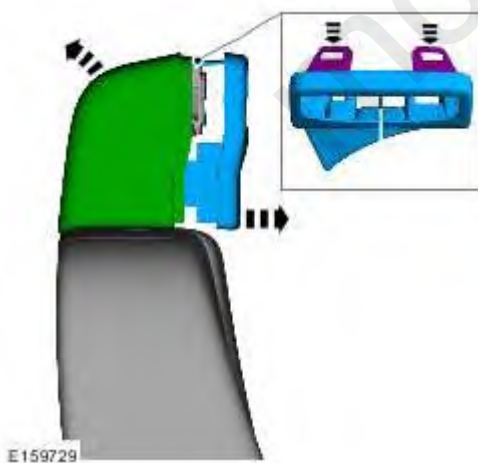

7.

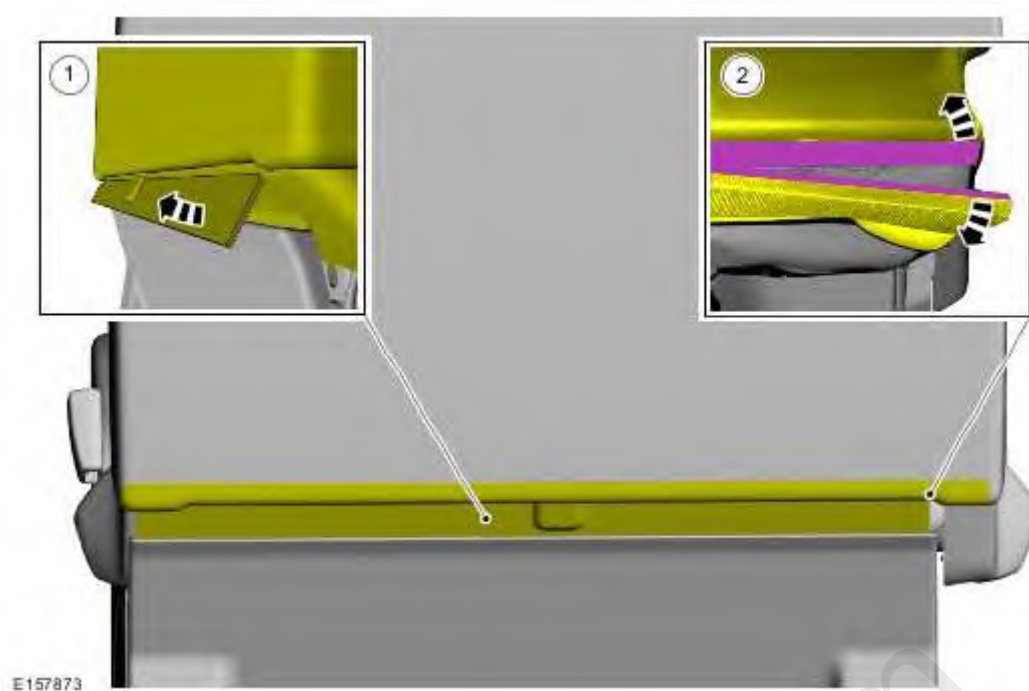

8.

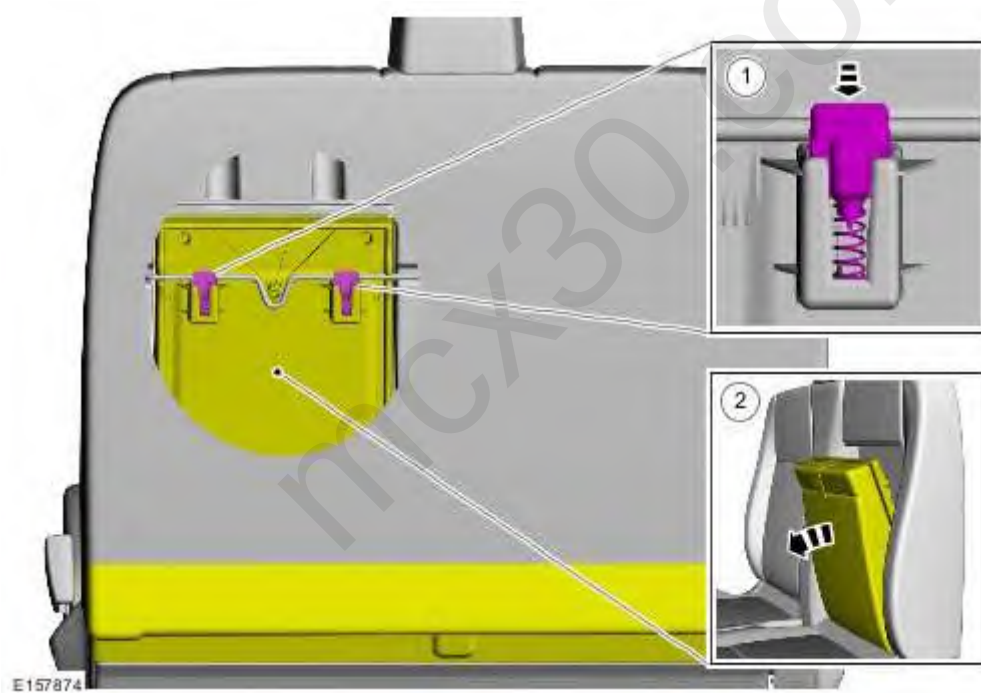


9.




10.



11. If equipped.

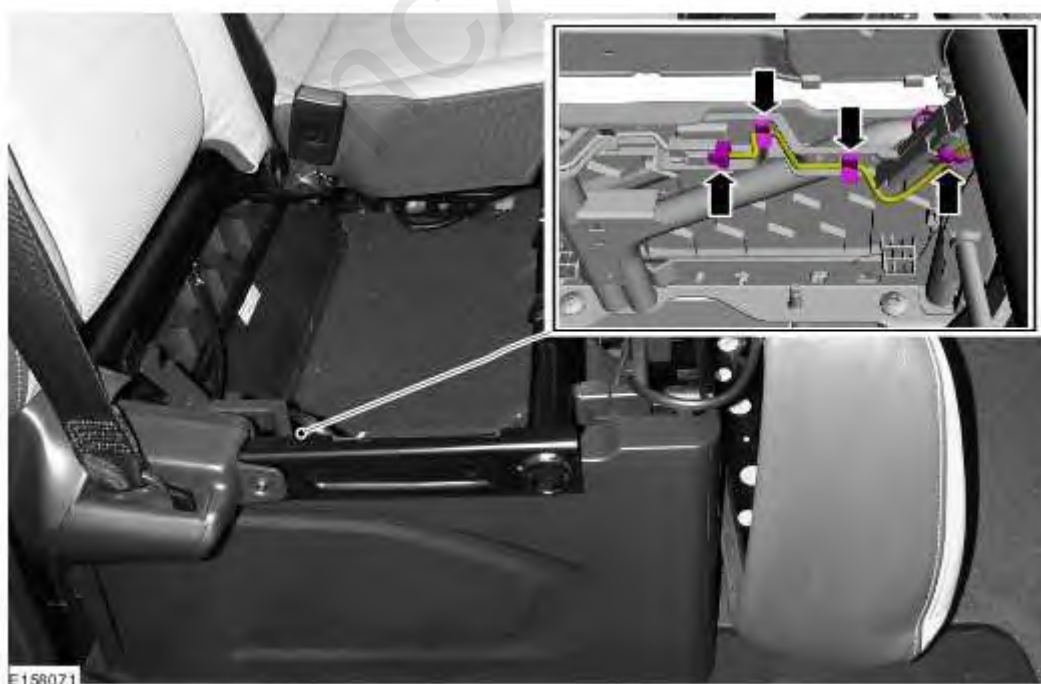

12.

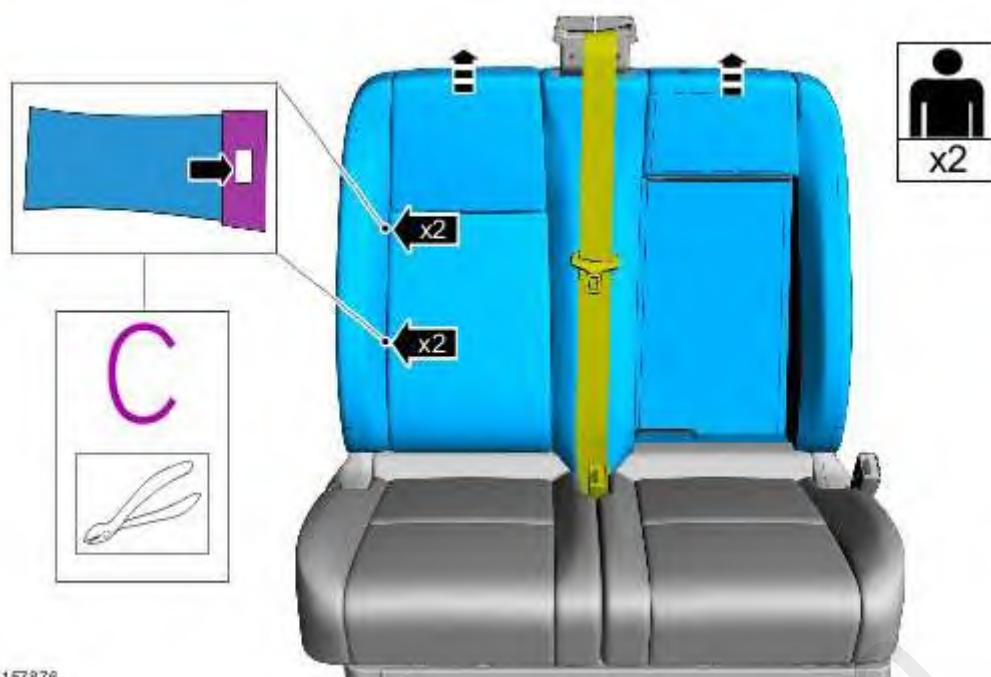


E157876

13.




E168094


14.

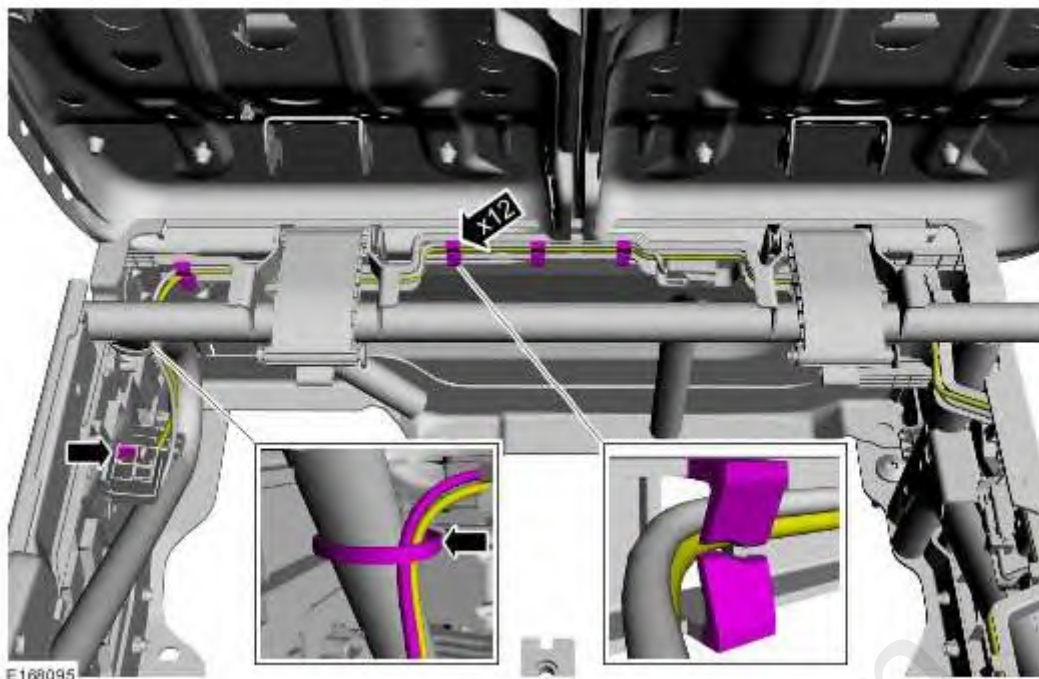

15.   
 Torque: 6 Nm

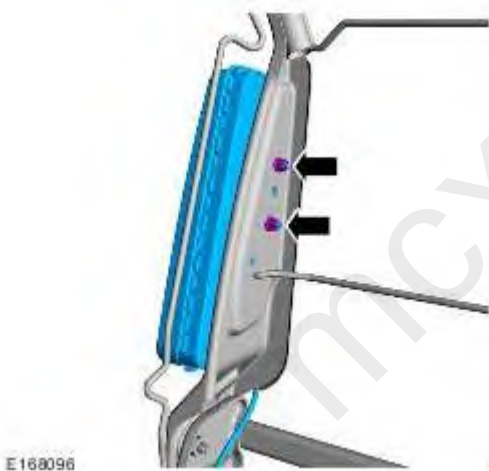


16. Torque: 47 Nm

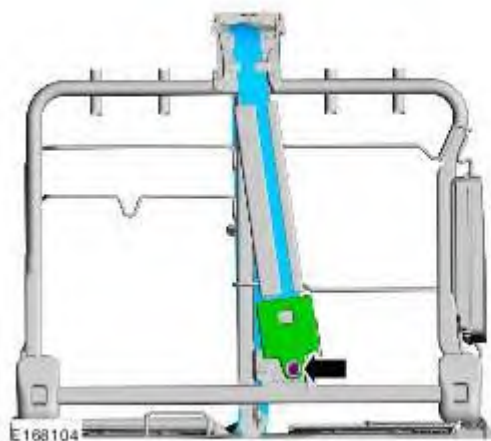

17. Torque: 47 Nm



18. Use the General Equipments: [Electric Drill](#), [Blind Rivet Gun](#)

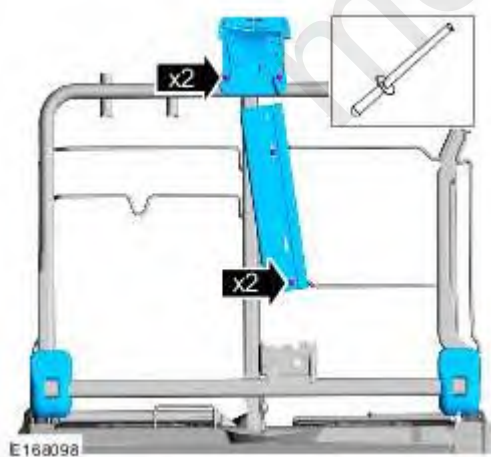

## Installation

1. To install, reverse the removal procedure.