

Disassembly and Assembly

General Equipment

2 mm Punch

Materials

Name	Specification
Multi-Purpose Grease	WSD-M1C234-A

Disassembly

1. Refer to: [Front Door Lock Cylinder](#) (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).
- 2.



E176523

3. NOTE: This step requires considerable force.



E176524

- 4.




E176525

5.



E176526

6. Use the General Equipment: [2 mm Punch](#)

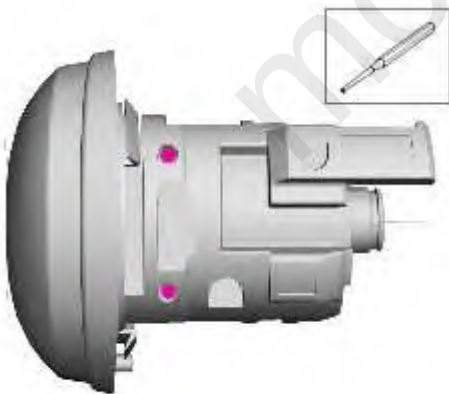


E176527

7. NOTE: Make sure that no component falls off during removal.



E176528

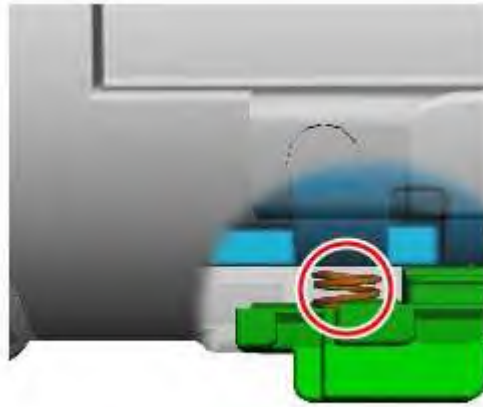

8.




E117681

9.  NOTICE: Note the position of the components before removal.




E117677

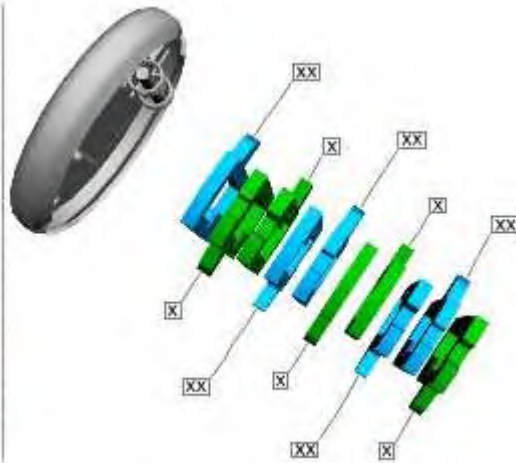


Assembly

NOTE: Make sure that new components are installed.


10.  NOTICE: Make sure that the components are installed to the position noted before removal.

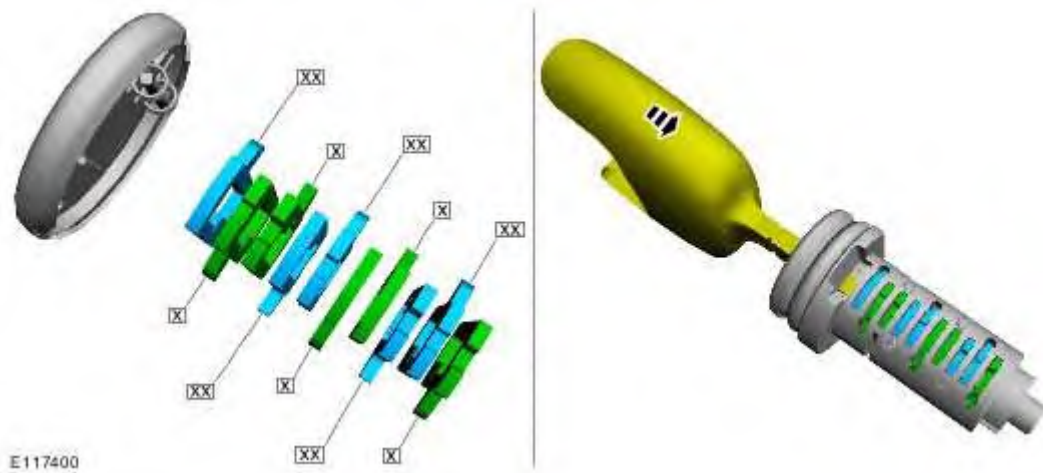

11. Material: [WSD-M1C234-A \(Multi-Purpose Grease\)](#)

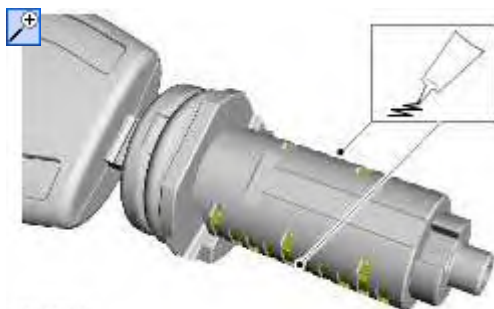


12.

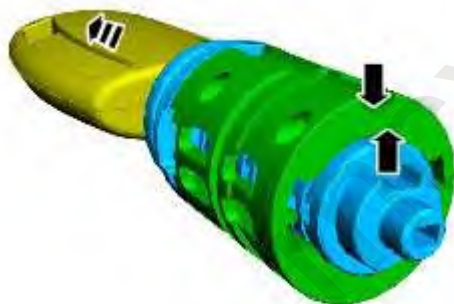


13.



E 176577

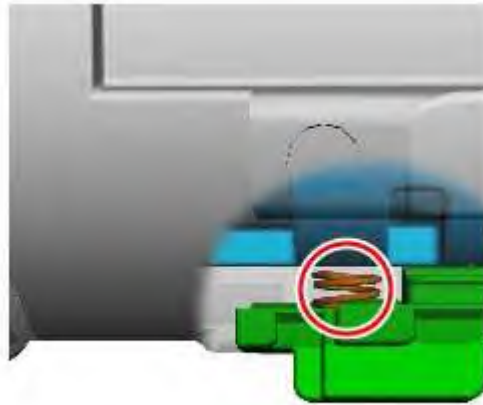

14. Use the General Equipment: 2 mm Punch

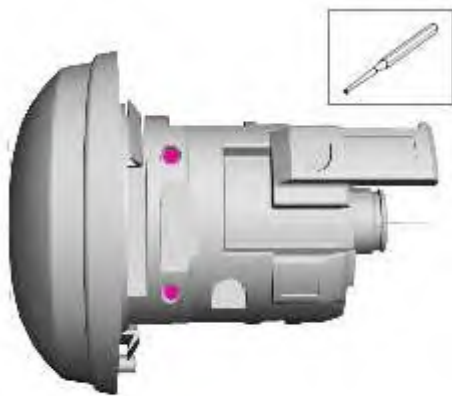

E 176527

15. NOTE: The component can only be installed in 1 position.



E 176528

16. NOTE: The component can only be installed in 1 position.



E 176525

17. NOTE: This step is only necessary when installing a new component.



E293181

18. NOTE: This step requires considerable force.



E 176529

19.



E176578

20. Refer to: [Front Door Lock Cylinder](#) (501-14 Handles, Locks, Latches and Entry Systems, Removal and Installation).