


Removal and Installation

Removal

1.

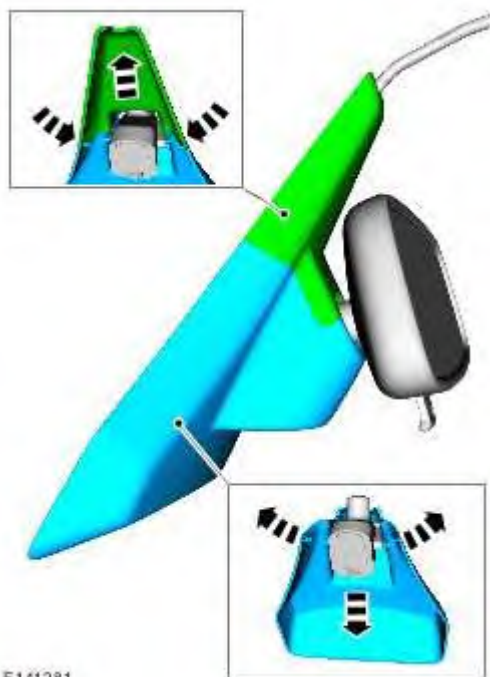

2.  **NOTICE:** After removing the bracket, wait for a minimum of 3 minutes before removing the rain sensor.



Installation

1. NOTICE:



Make sure that the surface is clean and free of foreign material.



Make sure that the insulator pads are correctly positioned to prevent direct contact with other components.

To install, reverse the removal procedure.

mcx30.com