

Removal and Installation


General Equipment

Interior Trim Remover

Removal

NOTE: Removal steps in this procedure may contain installation details.

1.


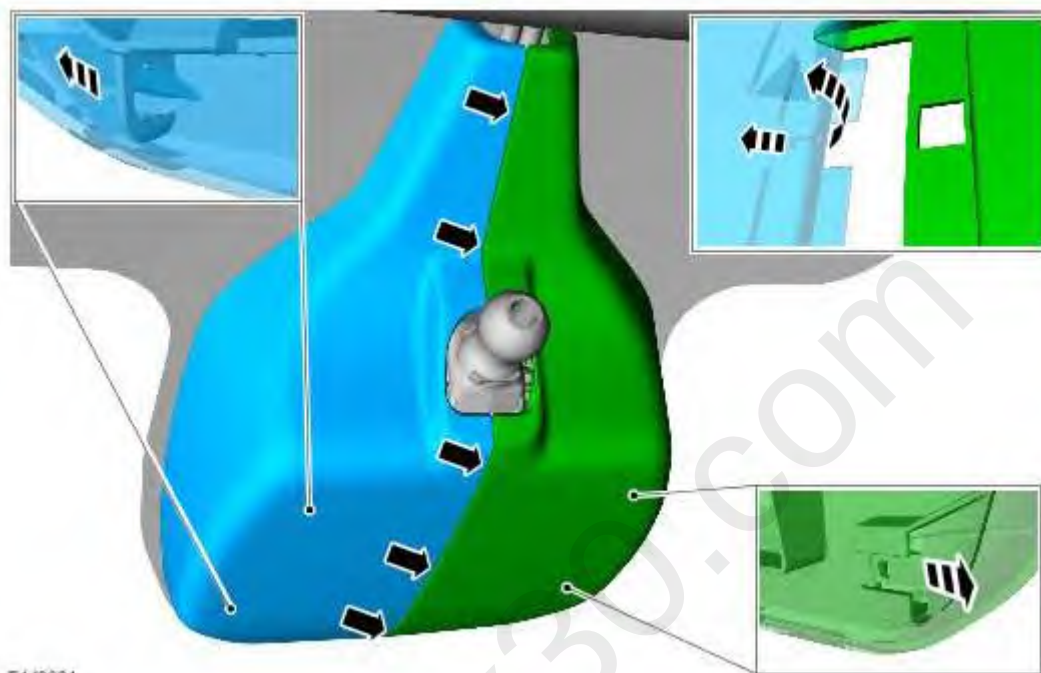


E140621

Left-hand drive vehicles

2.  NOTICE: Make sure that the cable cannot be damaged or cause a noise, vibration or harshness (NVH) concern.


Use the General Equipment: [Interior Trim Remover](#)

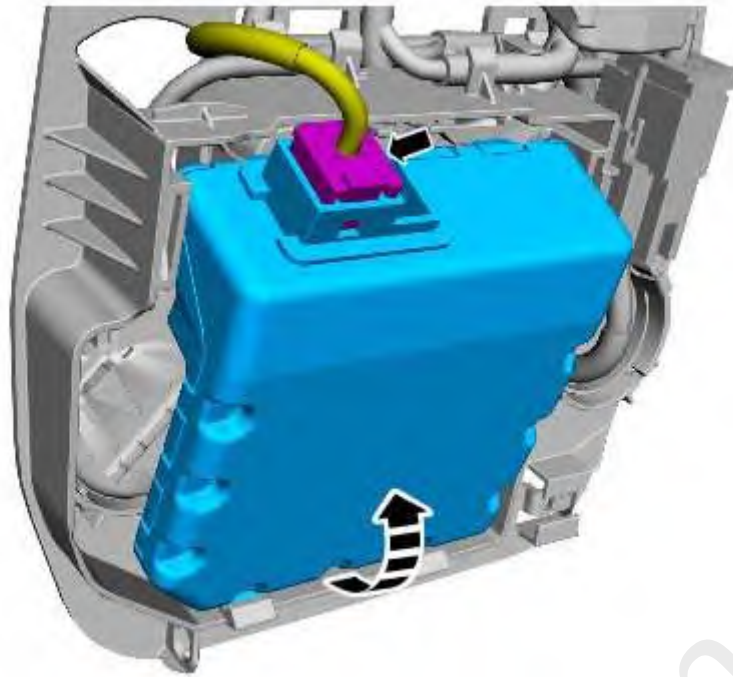

E140622

All vehicles

3.  **NOTICE:** After removing the bracket, wait for a minimum of 3 minutes before removing the rain sensor.

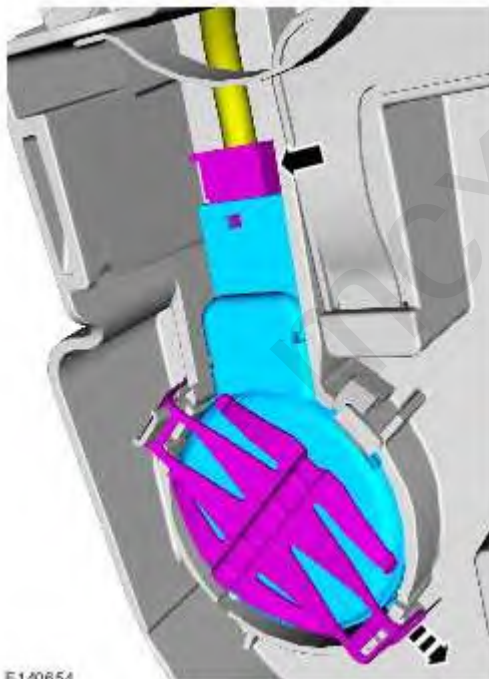

E140654

Installation

1. **NOTICE:**



Make sure that the surface is clean and free of foreign material.



Make sure that the insulator pads are correctly positioned to prevent direct contact with other components.

To install, reverse the removal procedure.

mcx30.com