

Removal and Installation

Removal

WARNINGS:



After the power supply has been disconnected, wait for a minimum of 3 minutes before disconnecting or removing any pyrotechnic components.



Make sure that the vehicle electrical system is fully depowered and no other power source is connected.


NOTE: Removal steps in this procedure may contain installation details.

1. Refer to: [Pyrotechnic Device Health and Safety Precautions](#) (100-00 General Information, Description and Operation).
2. Refer to: [Battery Disconnect and Connect](#) (414-01 Battery, Mounting and Cables, General Procedures).
3. Refer to: [Front Headliner - Bus](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).
4. Refer to: [Front Headliner - Van](#) (501-05 Interior Trim and Ornamentation, Removal and Installation).



5.

Torque: 9 Nm

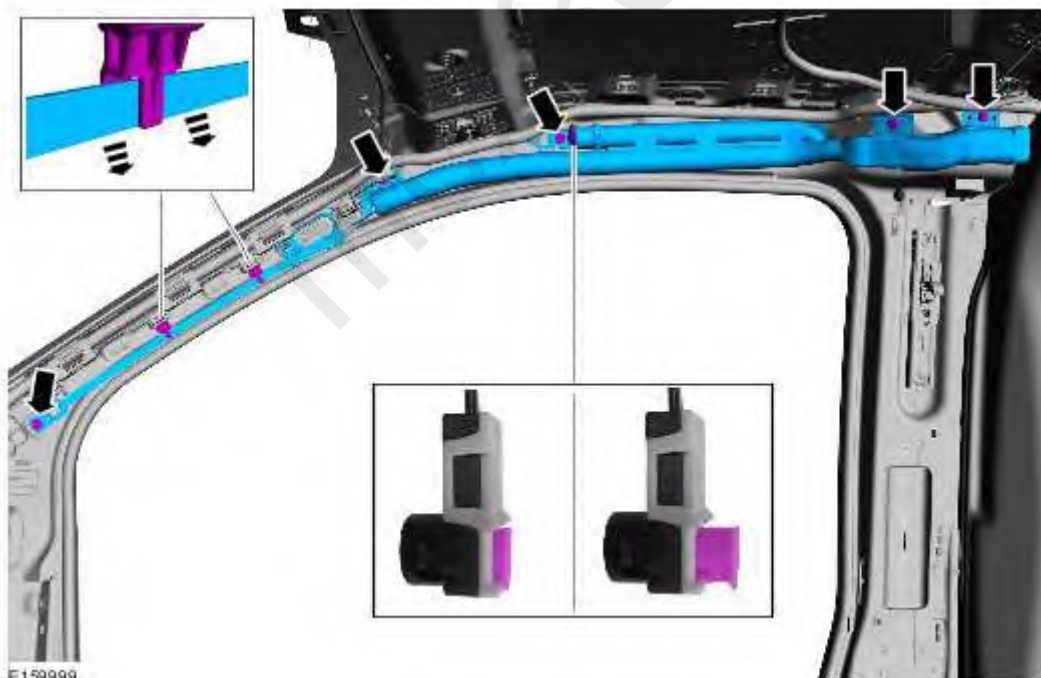

Installation

1. To install, reverse the removal procedure.