


K4M

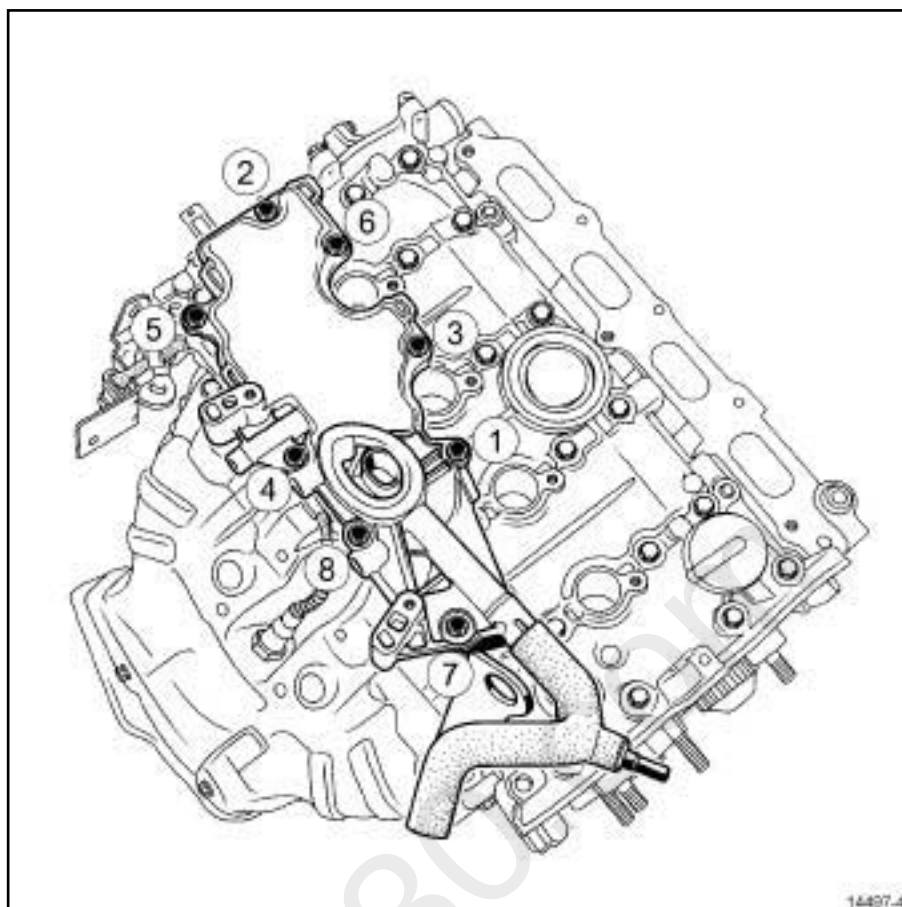

14497-4

- ☐ Torque tighten in order the **new oil separator bolts (15 N.m)**.

III - FINAL OPERATION

- ☐ Refit:

- the ignition coils (see **17A, Ignition, Coils: Removal - Refitting**, page **17A-1**) ,
- the inlet distributor (see **12A, Fuel mixture, Inlet distributor: Removal - Refitting**, page **12A-12**) ,
- the throttle valve (see **12A, Fuel mixture, Throttle valve: Removal - Refitting**, page **12A-11**) ,
- the air filter unit (see **12A, Fuel mixture, Air filter unit: Removal - Refitting**, page **12A-6**) ,
- the air resonator (see **12A, Fuel mixture, Air resonator: Removal - Refitting**, page **12A-2**) .