


Camshaft position sensor: Removal - Refitting

K9K

REMOVAL

OPERATION FOR REMOVAL OF PART CONCERNED

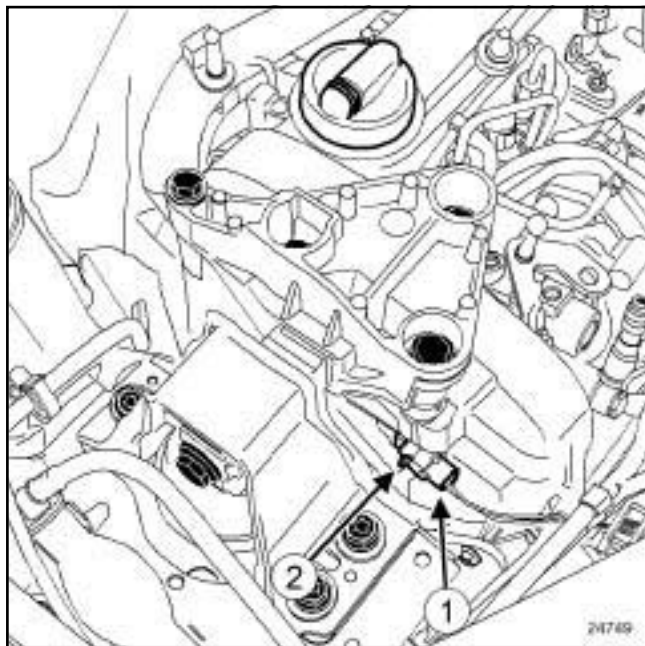

24749

- ☐ Disconnect the connector (1) from the camshaft position sensor.
- ☐ Remove:
 - the bolt (2) from the camshaft position sensor,
 - the camshaft position sensor.

REFITTING

I - REFITTING OPERATION FOR PART CONCERNED

- ☐ Refit:
 - the camshaft position sensor,
 - the camshaft position sensor bolt.

II - FINAL OPERATION

- ☐ Reconnect the camshaft position sensor connector.