

## Coolant temperature sensor: Removal - Refitting

K4M


## III - FINAL OPERATION

- ☐ Refit the air resonator (see **12A, Fuel mixture, Air resonator: Removal - Refitting**, page **12A-2**).
- ☐ Perform the following operations:
  - top up the coolant level,
  - bleed the cooling system (see **19A, Cooling, Cooling system: Draining - Refilling**, page **19A-6**).

|

mcx30.com

K4M

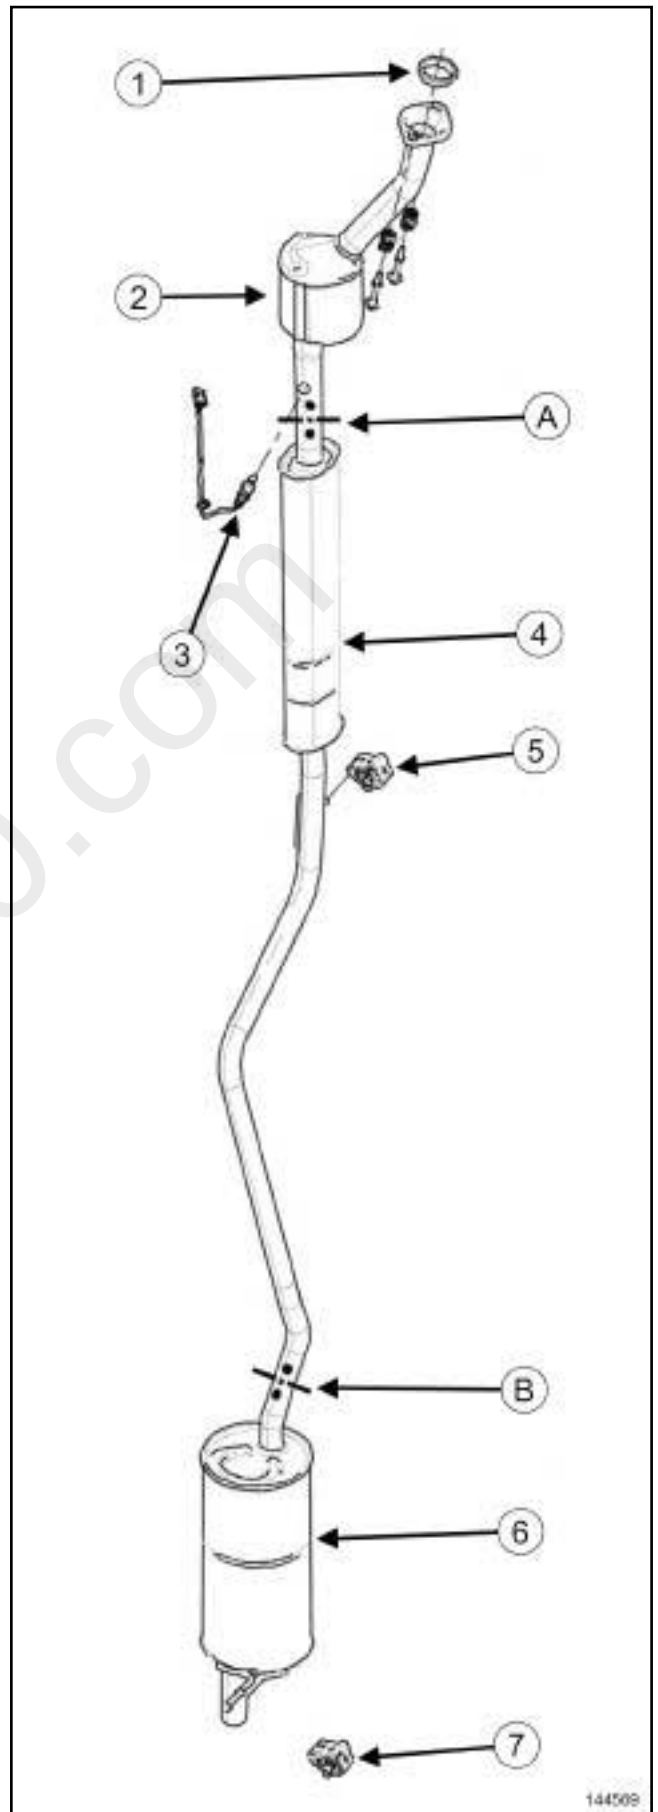

144569

- (A)

Area to be cut A
- (B)

Area to be cut B
- (1)

Exhaust system sealing ring
- (2)

Catalytic converter
- (3)

Downstream oxygen sensor
- (4)

Expansion chamber
- (5)

Expansion chamber rubber pad
- (6)

Silencer
- (7)

Silencer rubber pad


mcx30.com

# EXHAUST

## Exhaust: List and location of components

19B

K9K

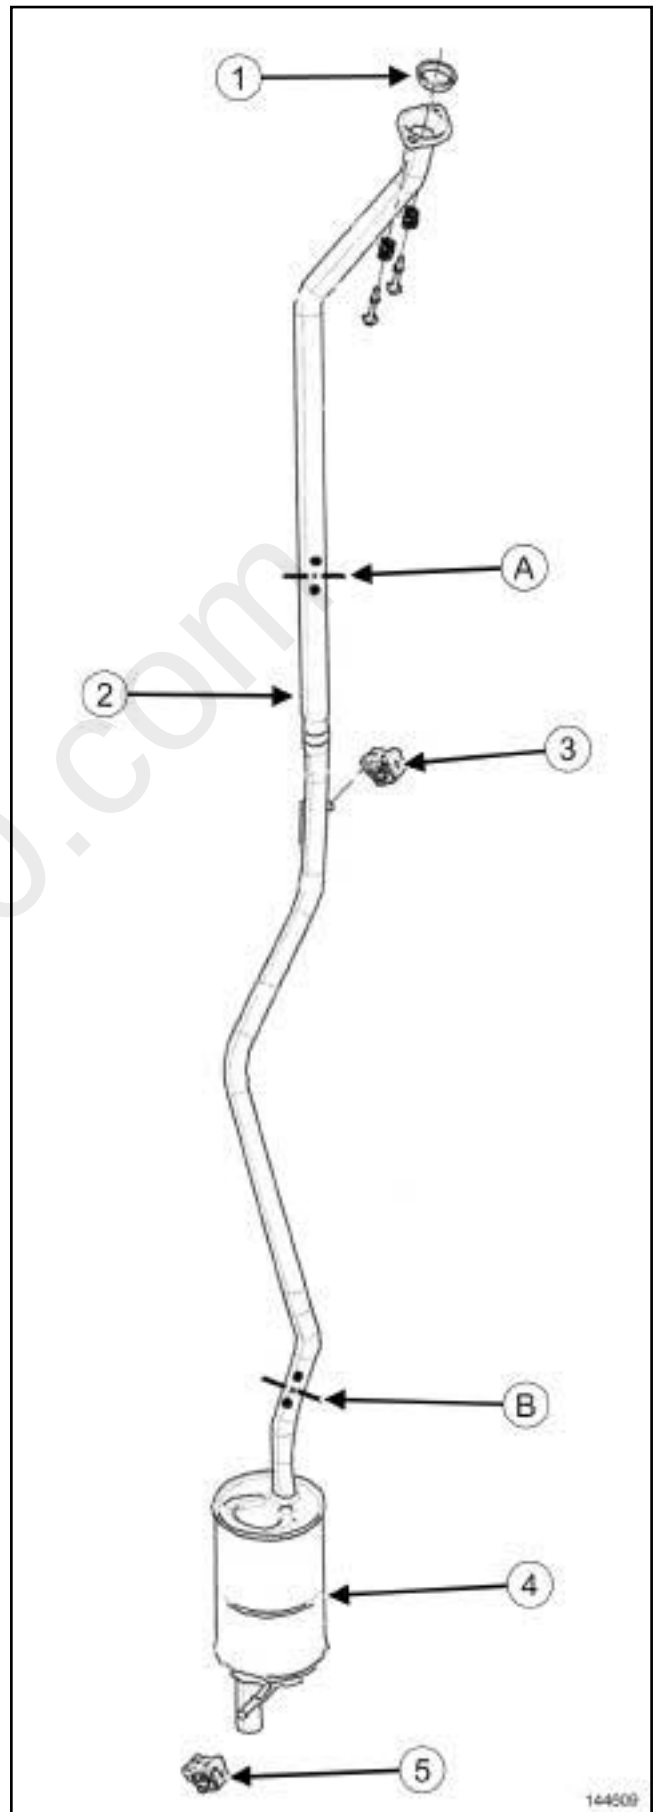

144609