


IGNITION

Plugs: Removal - Refitting

17A

D4F, and 740 – D4F, and 742 or 764

III - FINAL OPERATION

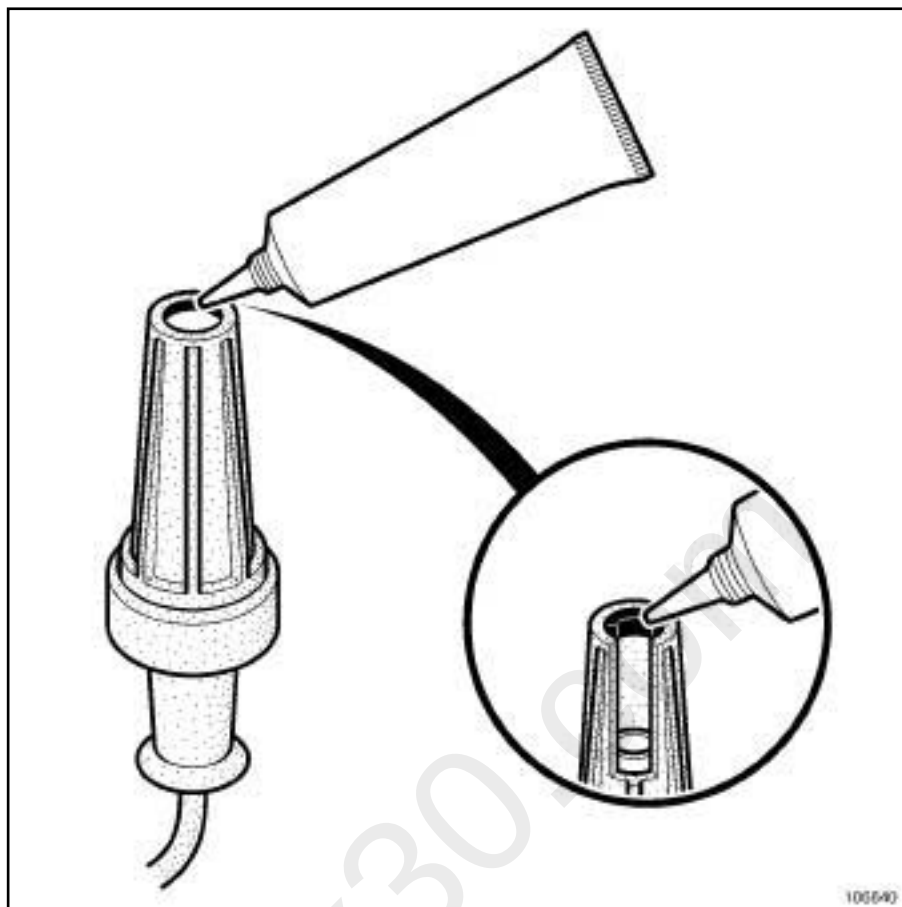

106640

- ☐ Apply a bead of **FLUORSTAR 2L** grease (see **Vehicle: Parts and consumables for the repair**) (04B, Consumables - Products) **2 mm** in diameter on the internal perimeter of the high-tension caps at the spark plug end.
- ☐ Connect the spark plug wiring.

D4F, and 740 – D4F, and 742 or 764

- ☐ Refit the air filter unit (see **12A, Fuel mixture, Air filter unit: Removal - Refitting**, page 12A-17) .