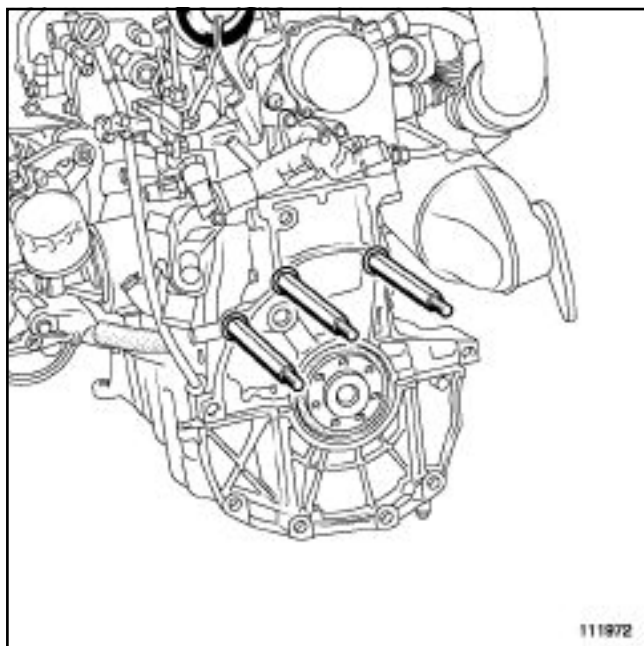
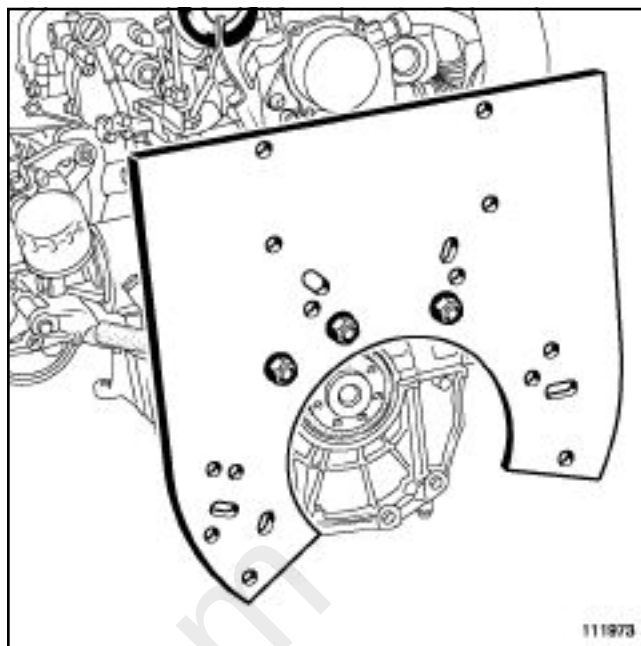
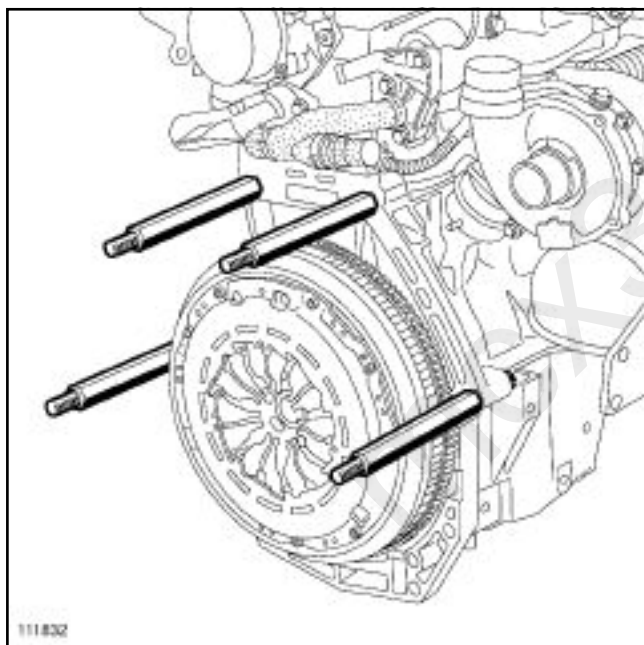
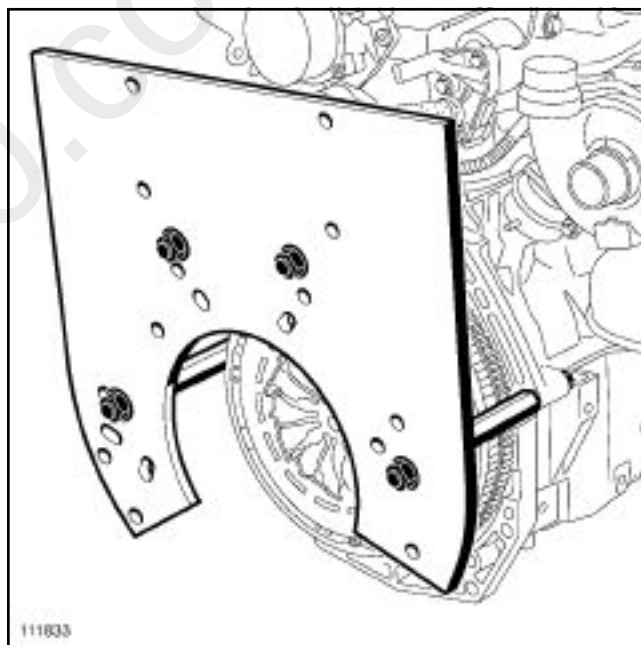


111972
111972111973
111973111832
111832

Fit the support stud of (**Mot. 1723**) to the cylinder block.

111833
111833

Fit the (**Mot. 1723**) plate onto the engine fitted with support studs by lining up:

- the support studs with holes **5, 6 and 7** on the plate (for engines with starter on the exhaust side),
- the support studs with holes **1, 2, 10 and 12** on the plate (for engines with starter on the oil filter side).

Fit the engine complete with plate onto the engine stand.

Remove the engine wiring harness.

Remove the drain plug from the sump using (**Mot. 1018**) or using a **drain plug spanner (8mm square drive)** .