

To avoid the destruction of the components of the cold loop and create electric leakage on high voltage electric vehicles, observe the types and quantities of oil imposed for each compressor including making an extra.



The following lubricants are not miscible:

-
- Planetelf PAG 488 for internal combustion engine vehicle,
- Sanden SP 10 for internal combustion engine vehicle,
- POE ND 11 for electric vehicle.

Close systematically oil cans after each use to prevent humidity penetration.

Do not use the oil contained in a can appearance seems begun viscous.

Tool:

Use a refrigerant charging station adapted to each type of lubricant.


There are automatic refrigerant charging stations or semi-automatic (see catalog garage equipment) for the injection of lubricants without mixture.



Repair-30x02x02-02x60-1-12-1.xml



XSL version : 3.02 du 22/07/11

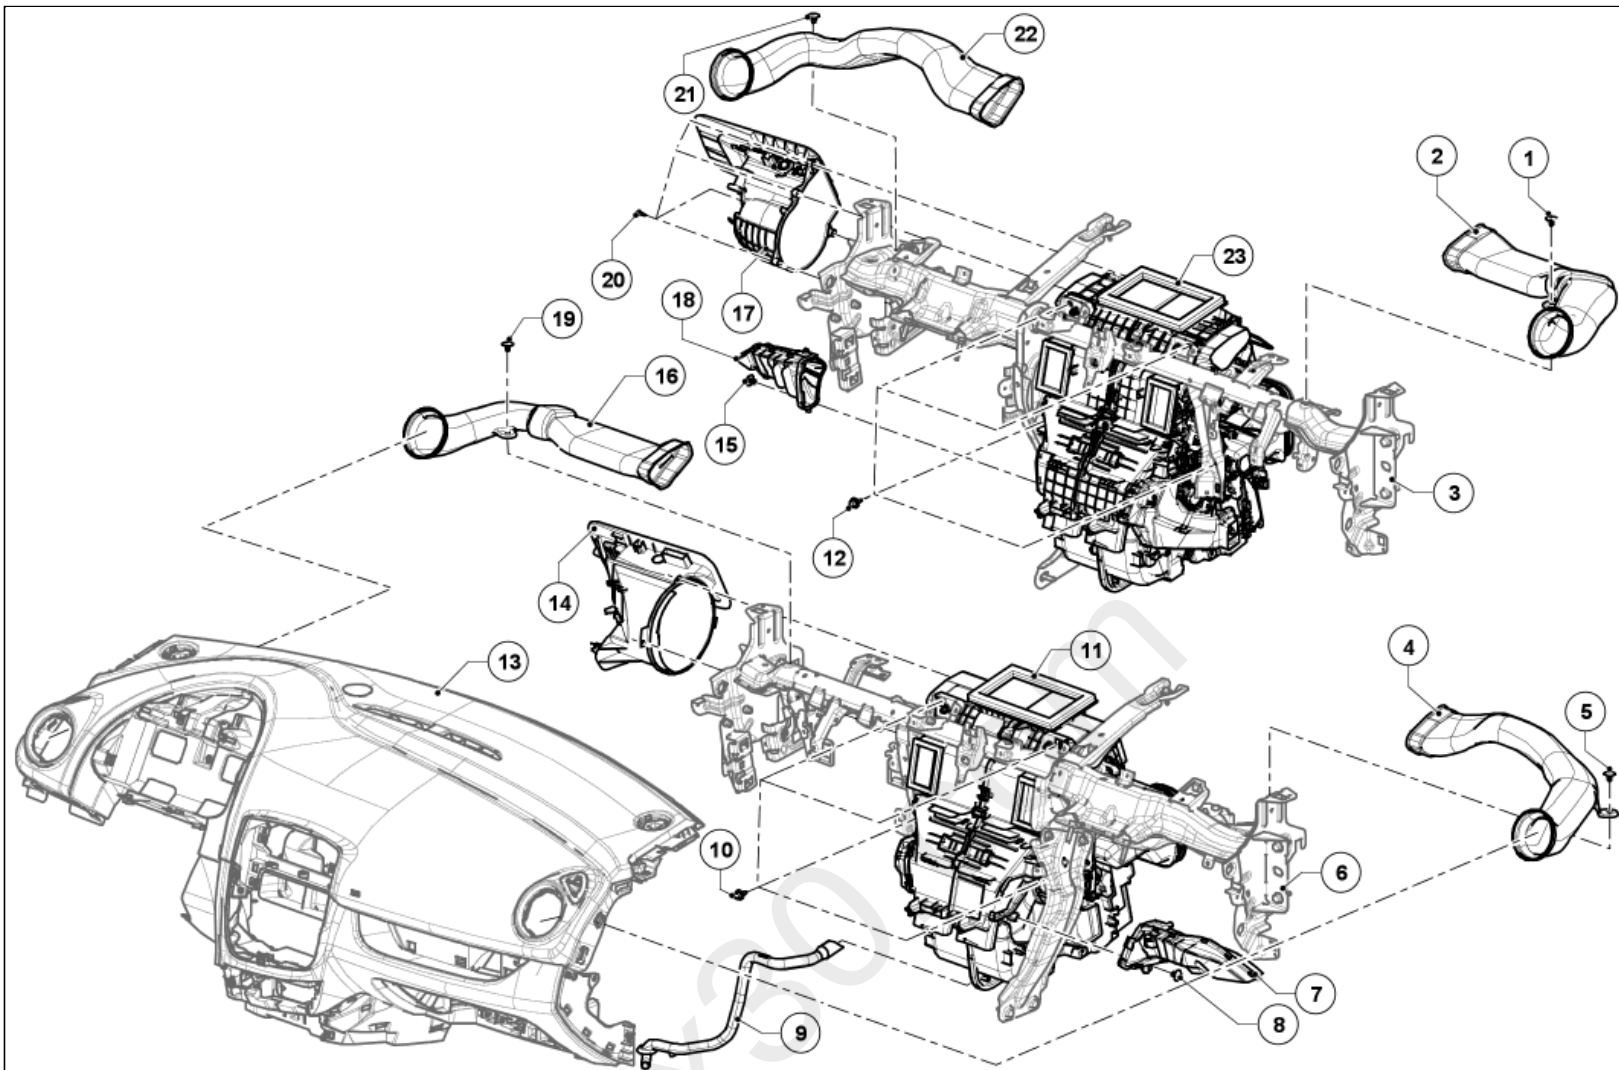

[Illustration key: Description](#) .

For fastenings with no specified tightening torque values, refer to the Table of Standard Torques: [Tightening torques: General information](#) .

Marks	Designations	Informations
9	Condensate drain pipe	
13	Dashboard	Dashboard assembly: Exploded view

DENSO DISTRIBUTION UNIT