

6- PRODUCTS FOR REPAIRING THE SEALING OF THE MATING SURFACES OF REMOVABLE PANELWORK COMPONENTS



filler mastic(see **Vehicle: Parts and consumables for the repair**) (04B, Consumables - Products).

7- FINISHING PRODUCTS FOR REPAIRING THE SEALING



anti-gravel mastic(see **Vehicle: Parts and consumables for the repair**) (04B, Consumables - Products).



Repair-00x03x04x29-02x21-1-1-1.xml



XSL version : 3.02 du 22/07/11

mcx30.com

BOLTED CONNECTION FOR EARTH


■ Fitting the electrical earth stud can be done following two possible procedures:

■ by resistance welding,

■ by fitting of crimped stud.

1. ASSEMBLY BY RESISTANCE WELDING

1- PREPARATION OF THE JOINT

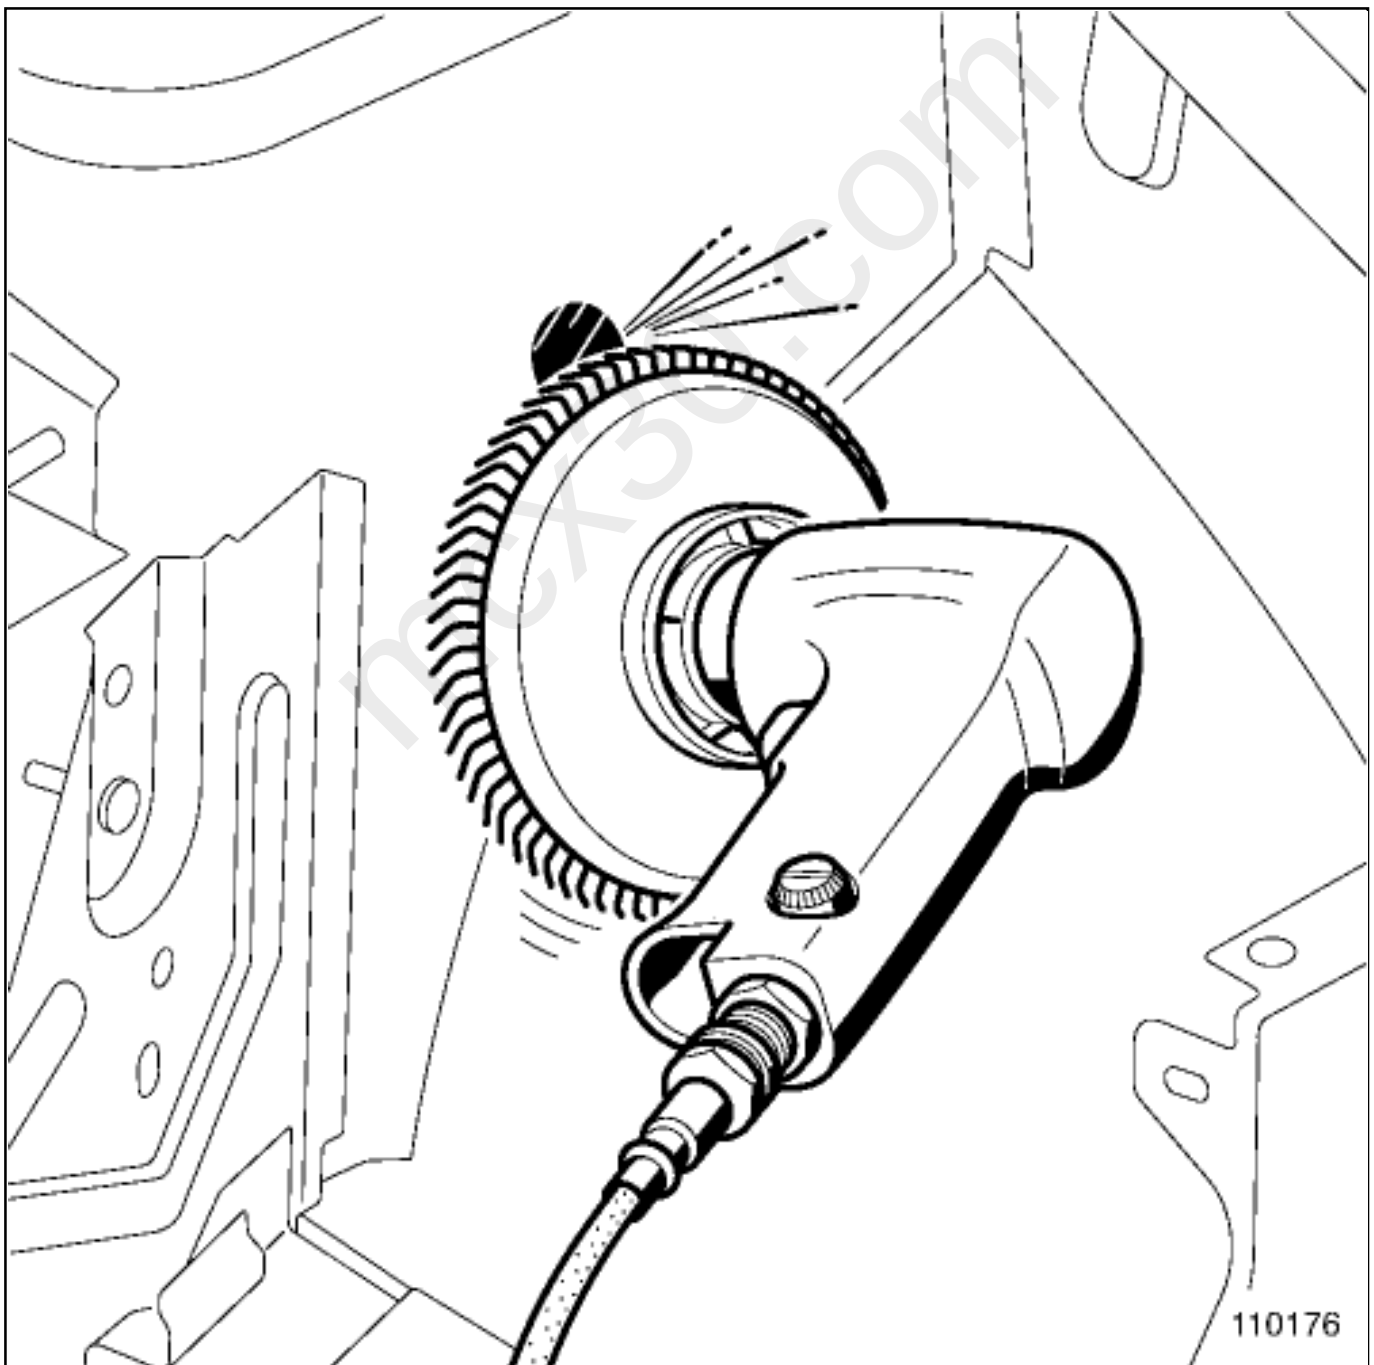


Scour the external face of the part at the location of the earth stud:

[\(see 05B, Equipment and Tools, Tools for stripping very thick soft mastic: Use\)](#) ,

[\(see 05B, Equipment and Tools, Tools for scraping rigid adhesives and paint: Use\)](#) .

2- WELDING

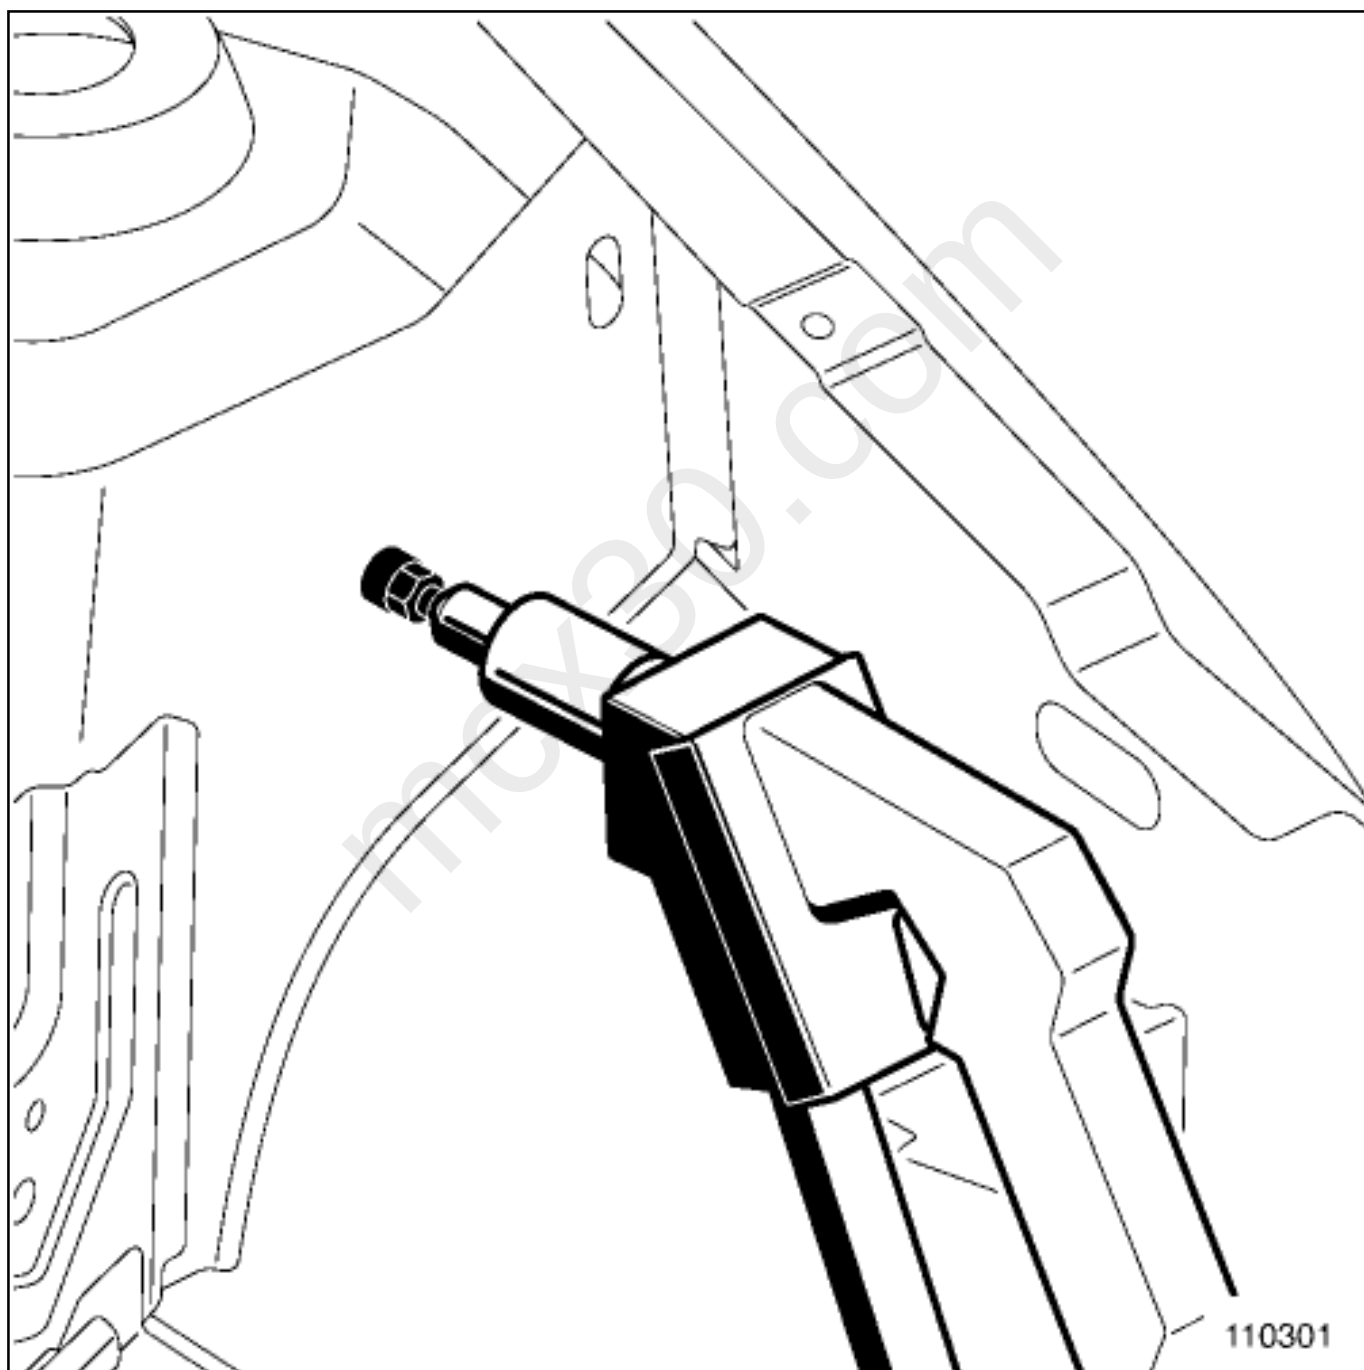

Weld the stud using a resistance welding equipped with the adapted nozzle, using the studs supplied with the welding device.